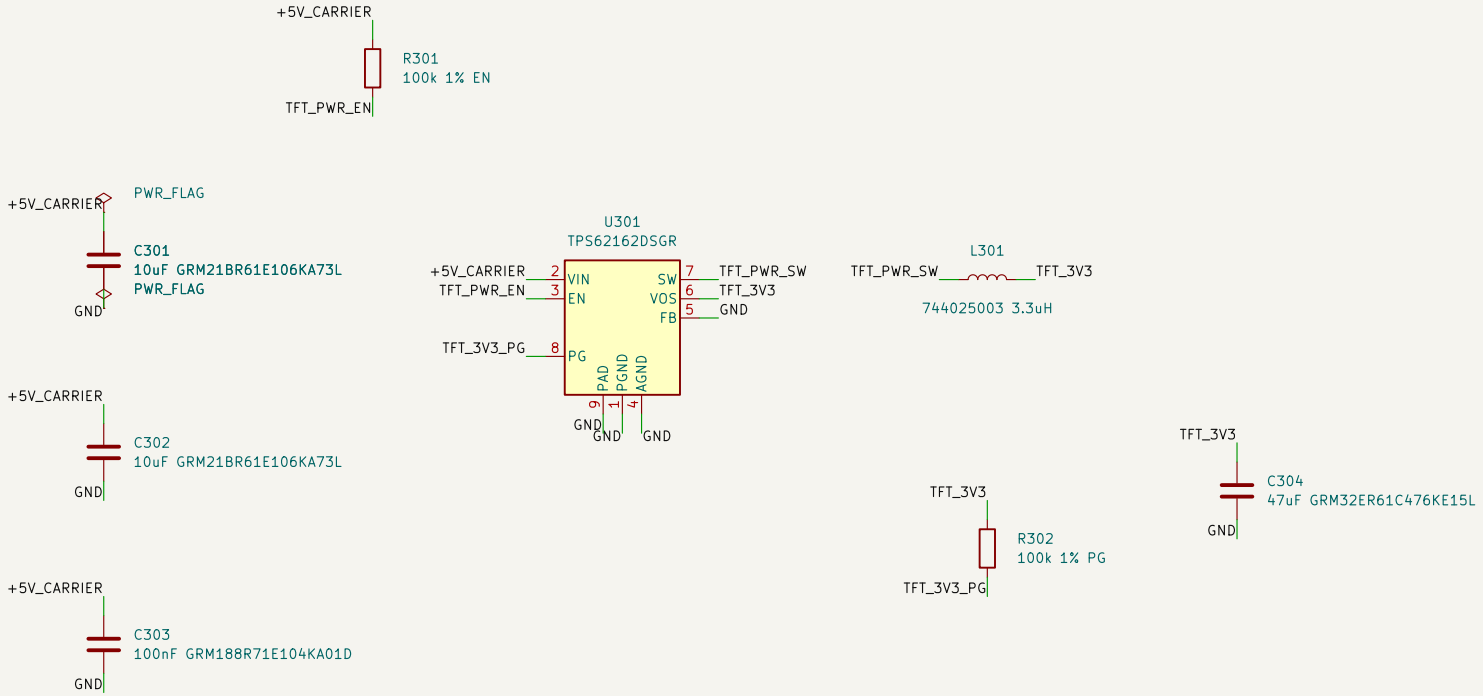


DRAFT / NOT FOR ORDER / NO FIRE
STANDALONE TFT POWER REVIEW — NOT CONNECTED TO ROOT PCB
External test supply: +5V_CARRIER 4.75..5.25V and GND; PWR_FLAG declares this external source ONLY.
TFT load 0..0.4A is a design assumption, not measured module current.
C301/C302: 10uF each,25V,X5R,0805; C304:47uF,16V,X5R,1210.
Ceff/DC bias,thermal,PG/EN ramp,SPI backfeed,layout and full5V budget NOT qualified.
PG is diagnostic open-drain, NOT an approved GPIO assignment or safety enable.
Kelvin VOS at C304+; VIN caps at VIN/PGND; AGND/PGND/EP single point.
No main SCH/PCB edits. General routing and firmware HOLD remain.
Do not import automatically: project ref collision / footprints must be reviewed.

Sheet: /		
File: tft_power_tps62162_review_DRAFT.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.7		Id: 1/1