
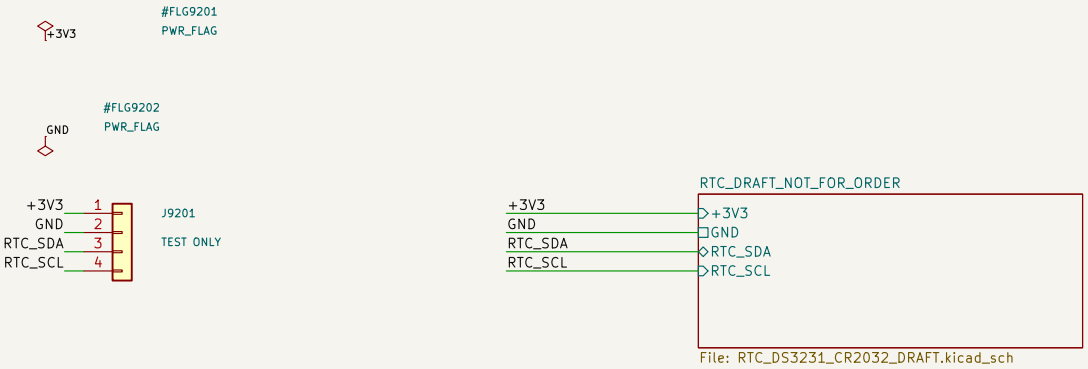


TEST FIXTURE ONLY — NOT THE CONTROLLER PCB
J9201 emulates external +3V3 / GND / MCU I2C. Do NOT FB this fixture into main PCB.
PWR_FLAGs here declare an externally provided supply and return, not extra circuits.
Leaf VBAT PWR_FLAG declares the real CR2032 source (Device:Battery_Cell has passive pins).
This ERC test does not verify power-off leakage, I2C electrical timing, or firmware.
Only RTC_DS3231_CR2032_DRAFT leaf is intended for later controlled integration.

Sheet: /		
File: RTC_INTEGRATION_FIXTURE_NOT_PCB.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.7		Id: 1/2

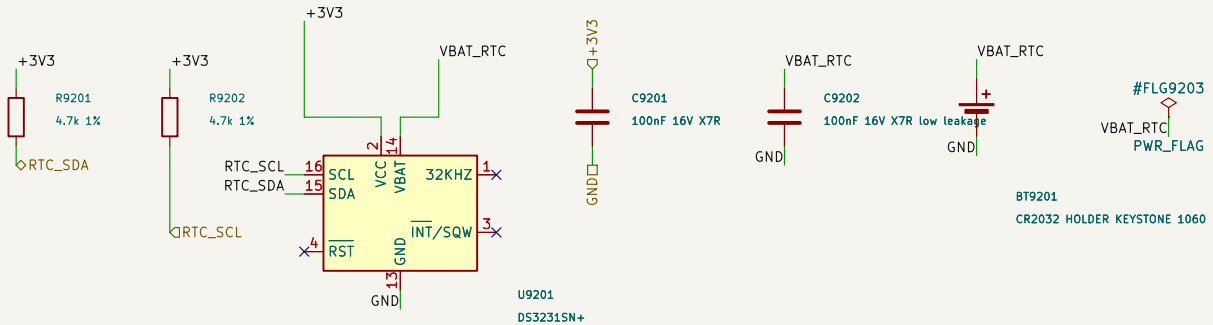

DRAFT / NOT FOR ORDER – RTC leaf, not integrated
U9201 = DS3231SN+; stock DS3231M symbol reused ONLY after pin-map check.
NC pins 5..12 MUST be GND. RST is NOT connected to ESP32 EN or safety reset.
CR2032 is NON-RECHARGEABLE. No charging path. VBAT_RTC feeds RTC only.
RTC_SDA/RTC_SCL: 3V3 I2C, 100kHz target; MCU GPIO allocation pending.
Power on return NEVER authorizes ignition. OSF/invalid time disables calendar features.
Purchasing: Keystone1060 ChipDip8049467254. DS3231SN+ sourcing not yet verified.
Not fitted to main PCB; no physical battery/backfeed or timekeeping tests yet.

Sheet: /RTC_DRAFT_NOT_FOR_ORDER/		
File: RTC_DS3231_CR2032_DRAFT.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.7		Id: 2/2