


Power architecture — arm side

Servos and Arduino get power from different sources. Grounds are tied together.

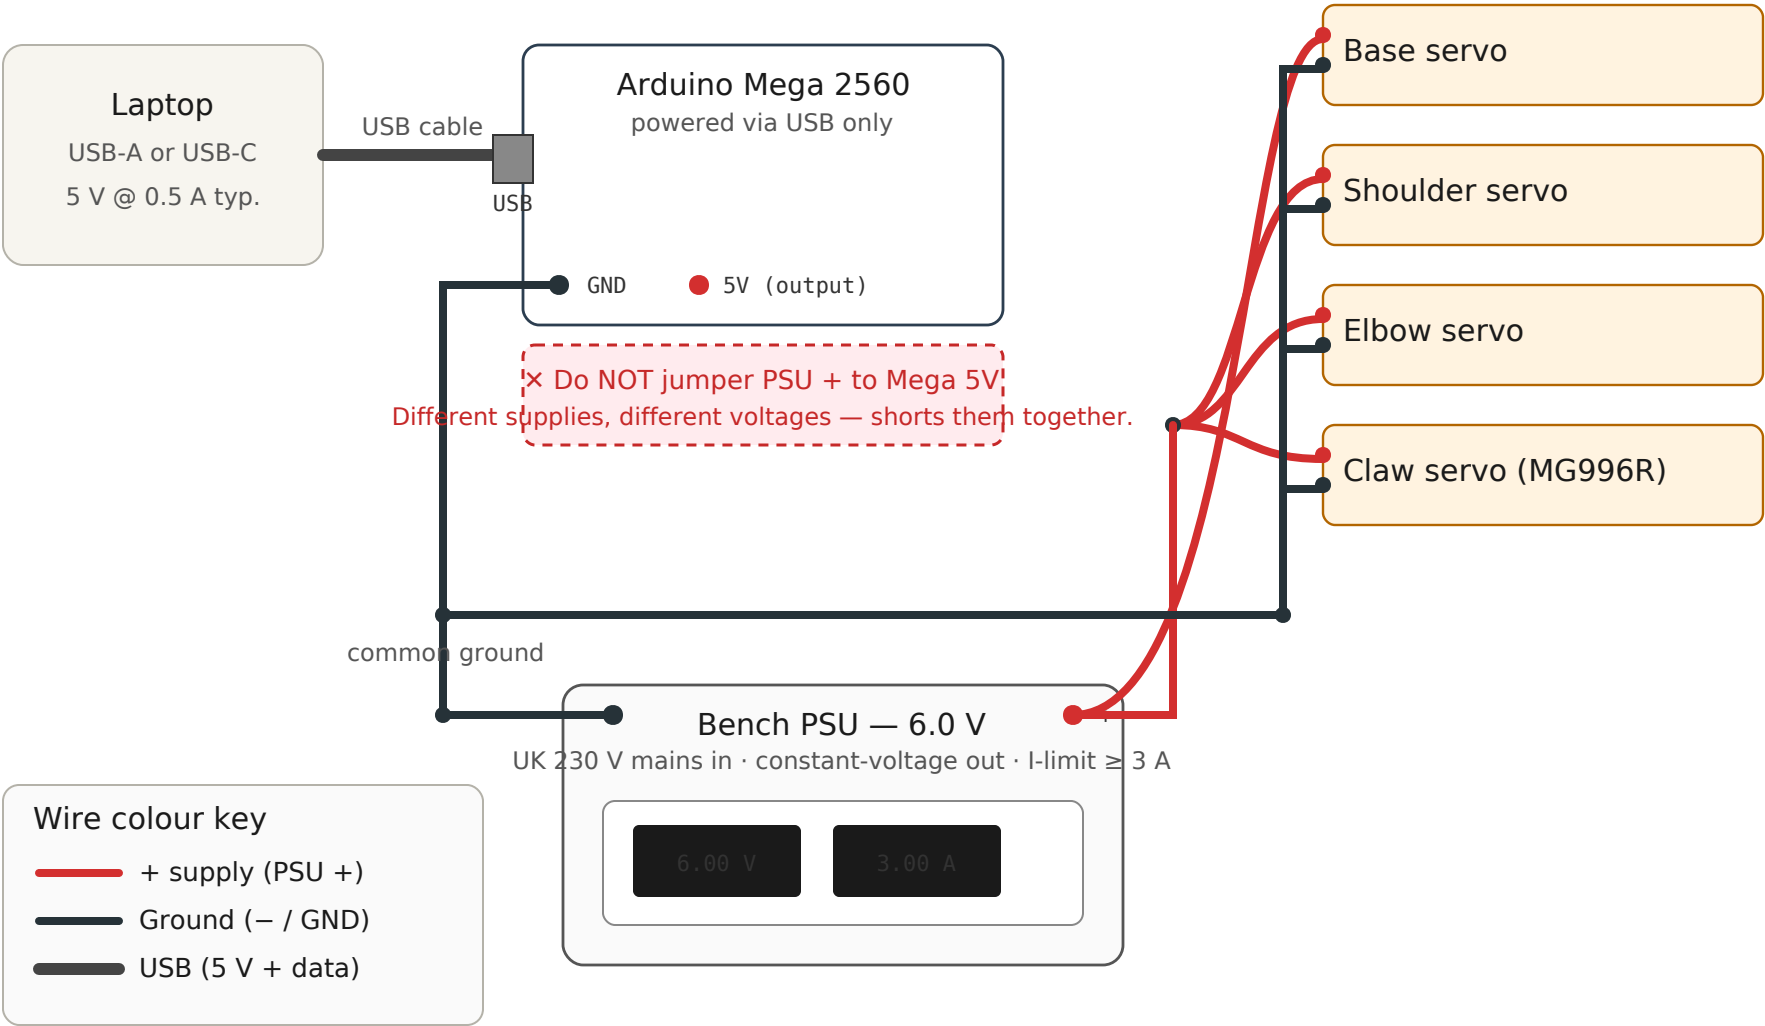

One rule: servos eat from the bench PSU, the Mega eats from USB, and the grounds shake hands.