

# Charging the Life



# DC charger

30kW

## Key Features

CE, cMETus(NRTL/CSA), FCC Compliant

CTEP/NTEP, Energy Star Compliant

Networked or non-networked capabilities

Remote monitoring and update for optimal operation

Fits all CCS vehicles



High energy efficiency

Effortless charging

Easy installation and minimal maintenance

Advanced service support


JC-9A31-30-CX (CE)

JC-9A31-30-CT (UL)


## Specifications

|                 |                                  |                                                                                                                 |
|-----------------|----------------------------------|-----------------------------------------------------------------------------------------------------------------|
| General         | Connector                        | CCS                                                                                                             |
|                 | Communication with EV            | IEC 61851 PLC                                                                                                   |
|                 | Display                          | 12.1" LCD Display, Touch screen                                                                                 |
|                 | Support language                 | English, French, Spanish (Other languages available upon request)                                               |
|                 | Push buttons                     | 1 emergency stop button                                                                                         |
|                 | User authentication              | ISO/IEC 14443 A / B Mifare RFID reader, Credit card reader                                                      |
| Electric        | Input                            | 3Ø4W, 400VAC, 50/60Hz, Max.33kVA (CE Version)<br>3Ø4W, 480VAC, 60Hz, Max.33kVA (UL Version)                     |
|                 | Input   THD                      | < 5%                                                                                                            |
|                 | Output                           | Voltage : 150~1,000VDC(Max)<br>Current : 80A(Max)<br>Max power : 30kW                                           |
|                 | Power factor                     | > 0.98 (Full Scale)                                                                                             |
|                 | Charging mode                    | CC, CV                                                                                                          |
|                 | Voltage accuracy                 | ±1.0% (Full Scale)                                                                                              |
|                 | Current accuracy                 | ±1.0% (Full Scale)                                                                                              |
|                 | Max. efficiency                  | > 95% (at rated voltage, rated current)                                                                         |
|                 | Isolation impedance              | 10MΩ@1,000V                                                                                                     |
|                 |                                  |                                                                                                                 |
| Environment     | Operating temperature            | -30°C ~ 50°C (-22°F ~ 122°F with derating)                                                                      |
|                 | Humidity                         | < RH95% (Non-condensing)                                                                                        |
| Communication   | Network interface                | Ethernet, Cellular, WLAN                                                                                        |
|                 | Protocol                         | OCPP1.6J / 2.0.1                                                                                                |
| Safety standard | Protection                       | Over voltage, Over current, Short-circuit, Over temperature, Earth leakage, Surge protection, Contactor welding |
| Mechanical      | Protection degree                | IP54 (NEMA 3R), IK10                                                                                            |
|                 | Cooling                          | Forced air                                                                                                      |
|                 | Charging cable length (Standard) | 6m (19.7ft) / Adjustable upon request                                                                           |
|                 | Dimension                        | 650(W) x 622.3(H) x 325.1(D) mm (25.6(W) x 24.5(H) x 12.8(D) inch)                                              |
|                 | Weight                           | 91kg (200lb)                                                                                                    |

## Feature highlights

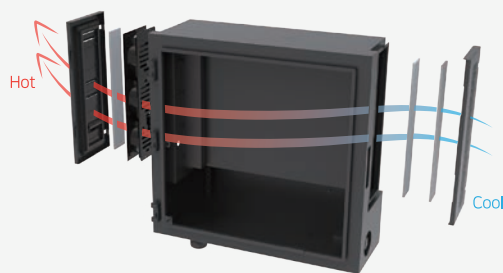

Advanced internal design creates airflow between power modules to solve heat generation problem

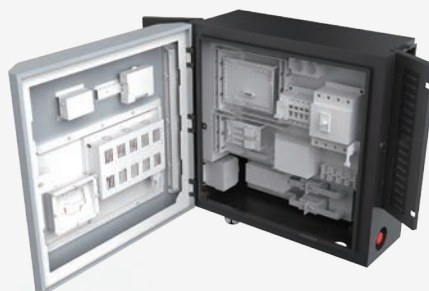

Front and side doors can be opened for maintenance



Can be wall-mounted or installed on a pedestal (optional)

# DC charger

100kW

## Key Features

CE, cMETus(NRTL/CSA), FCC Compliant  
CTEP/NTEP, Energy Star Compliant  
Remote monitoring and update for optimal operation  
Simultaneous charging  
Fits all CCS, CHAdeMO, NACS vehicles



High energy efficiency  
Effortless charging  
Easy installation and minimal maintenance  
Advanced service support  
New cable retraction system with long cables


JC-9932-100-CX (CE)

JC-9932-100-CT (UL)

## Specifications

|                 |                                  |                                                                                                                                                                                                                                            |
|-----------------|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| General         | Connector                        | CCS, NACS, CHAdeMO (optional)                                                                                                                                                                                                              |
|                 | Communication with EV            | IEC 61851 PLC                                                                                                                                                                                                                              |
|                 | Display                          | 24" LCD Display, Touch screen                                                                                                                                                                                                              |
|                 | Support Language                 | English, French, Spanish (Other languages available upon request)                                                                                                                                                                          |
|                 | Push Buttons                     | 1 emergency stop button                                                                                                                                                                                                                    |
|                 | User Authentication              | ISO/IEC 14443 A / B Mifare RFID reader, Credit card reader                                                                                                                                                                                 |
| Electric        | Input                            | 3Ø4W, 400VAC, 50/60Hz, Max.110kVA (CE Version)<br>3Ø4W, 480VAC, 60Hz, Max.110kVA (UL Version)                                                                                                                                              |
|                 | Input   THD                      | < 5%                                                                                                                                                                                                                                       |
|                 | Output                           | 1CH Voltage : 150~1,000VDC(Max)<br>Current : 200A(Max)<br>Max power : 100kW (50kW each for simultaneous charging)<br><br>2CH Voltage : 150~1,000VDC(Max)<br>Current : 200A(Max)<br>Max power : 100kW (50kW each for simultaneous charging) |
|                 | Power Factor                     | > 0.98 (Full Scale)                                                                                                                                                                                                                        |
|                 | Charging Mode                    | CC, CV                                                                                                                                                                                                                                     |
|                 | Voltage Accuracy                 | ±1.0% (Full Scale)                                                                                                                                                                                                                         |
|                 | Current Accuracy                 | ±1.0% (Full Scale)                                                                                                                                                                                                                         |
|                 | Max. Efficiency                  | > 95% (at rated voltage, rated current)                                                                                                                                                                                                    |
|                 | Isolation Impedance              | 10MΩ@1,000V                                                                                                                                                                                                                                |
| Environment     | Operating temperature            | -30°C ~ 50°C (-22°F ~ 122°F with derating)                                                                                                                                                                                                 |
|                 | Humidity                         | < RH95% (Non-condensing)                                                                                                                                                                                                                   |
| Communication   | Network Interface                | Ethernet, Cellular, WLAN                                                                                                                                                                                                                   |
|                 | Protocol                         | OCPP1.6J / 2.0.1                                                                                                                                                                                                                           |
| Safety standard | Protection                       | Over voltage, Over current, Short-circuit, Over temperature, Earth leakage, Surge protection, Contactor welding                                                                                                                            |
| Mechanical      | Protection degree                | IP54 (NEMA 3R), IK10                                                                                                                                                                                                                       |
|                 | Cooling                          | Forced air                                                                                                                                                                                                                                 |
|                 | Charging Cable Length (Standard) | 6m (19.7ft) / Adjustable upon request                                                                                                                                                                                                      |
|                 | Dimension                        | 1,064(W) x 1,900(H) x 523(D) mm (42(W) x 74.8(H) x 20.6(D) inch)                                                                                                                                                                           |
|                 | Weight                           | 393kg (866lb)                                                                                                                                                                                                                              |


## Feature highlights



Advanced internal design creates airflow between power modules to solve heat generation problem



Sterilize connector with UV-C LED

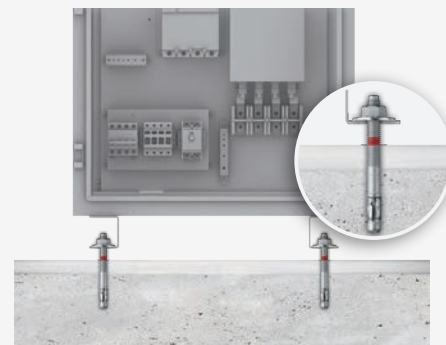

Aseismatic design (optional)

# DC charger

180kW / 240kW

## Key Features

CE, cMETus(NRTL/CSA), FCC, CTEP/NTEP, Energy Star Compliant

Remote monitoring and update for optimal operation

Maximize space utilization

Simultaneous charging

Fits all CCS and NACS vehicles

Compliant with NEVI standards and meet  
BABA Phase 2 requirements, including 55%  
US-related costs.



JC-9942-180/240-CX (CE)


JC-9932-180/240-CT (UL)



## Specifications

| Specification   |                                  | DC Charger 180kW                                                                                                                                                                                                                                                                                               | DC Charger 240kW                                                                                                                                                                                                                                                                                                 |
|-----------------|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| General         | Connector                        | CCS, NACS                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                  |
|                 | Communication with EV            | IEC 61851 PLC                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                  |
|                 | Display                          | 12.1" LCD Display, Touch Screen                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                  |
|                 | Support Language                 | English, French, Spanish (Other languages available upon request)                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                  |
|                 | Push Buttons                     | 1 emergency stop button                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                  |
|                 | User Authentication              | ISO/IEC 14443 A/B Mifare RFID reader, Credit card reader, NFC                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                  |
| Electric        | Input                            | 3Ø4W, 400VAC, 50/60Hz, Max.198kVA or 264kVA (CE Version)<br>3Ø3W (no neutral), 480VAC, 60Hz, Max.198kVA or 264kVA (UL Version)                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                  |
|                 | Input   THD                      | < 5%                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                  |
|                 | Output                           | 1CH Voltage : 150~1,000VDC(Max)<br>Current(CE) : 350A(Max)<br>Current(UL) : 375A(Max)<br>Max power : 180kW<br>(90kW each for simultaneous charging)<br><br>2CH Voltage : 150~1,000VDC(Max)<br>Current(CE) : 350A(Max)<br>Current(UL) : 375A(Max)<br>Max power : 180kW<br>(90kW each for simultaneous charging) | 1CH Voltage : 150~1,000VDC(Max)<br>Current(CE) : 350A(Max)<br>Current(UL) : 375A(Max)<br>Max power : 240kW<br>(120kW each for simultaneous charging)<br><br>2CH Voltage : 150~1,000VDC(Max)<br>Current(CE) : 350A(Max)<br>Current(UL) : 375A(Max)<br>Max power : 240kW<br>(120kW each for simultaneous charging) |
|                 | Power Factor                     | >0.98 (Full Scale)                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                  |
|                 | Charging Mode                    | CC, CV                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                  |
|                 | Voltage Accuracy                 | ±1.0% (Full Scale)                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                  |
|                 | Current Accuracy                 | ±1.0% (Full Scale)                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                  |
|                 | Max, Efficiency                  | > 95% (at rated voltage, rated current)                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                  |
|                 | Isolation Impedance              | 10MΩ@1,000V                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                  |
| Environment     | Operating temperature            | -30℃ ~ 50℃ (-22°F ~ 122°F with derating)                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                  |
|                 | Humidity                         | < RH95% (Non-condensing)                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                  |
| Communication   | Network Interface                | Ethernet, Cellular, WLAN                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                  |
|                 | Protocol                         | OCPP1.6J / 2.0.1                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                  |
| Safety standard | Protection                       | Over voltage, Over current, Short-circuit, Over temperature, Earth leakage, Surge protection, Contactor welding                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                  |
| Mechanical      | Protection degree                | IP54 (NEMA 3R), IK10                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                  |
|                 | Cooling                          | Forced air                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                  |
|                 | Charging Cable Length (Standard) | 5.5m (18ft) / Adjustable upon request                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                  |
|                 | Dimension                        | 1,046(W) x 1,900(H) x 683(D) mm (41.1(W) x 74.8(H) x 26.9(D) inch)                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                  |
|                 | Weight                           | 637kg (1,405lb)                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                  |

## Feature highlights



Air-Flow structure increases cooling efficiency



Design all operating parts between 15" and 48" to protect the rights of people with disabilities

# Distributed Charging System

DC high power charger 350kW / 400kW

## Key Features

CE, cMETus(NRTL/CSA), FCC, CTEP/NTEP, Energy Star Compliant

Remote monitoring and update for optimal operation

60m (197ft) of maximum distance between power cabinet and dispenser

Dynamic Power Sharing

Fits all CCS and NACS vehicles

Compliant with NEVI standards and meet  
BABA Phase 2 requirements, including 55%  
US-related costs.




JC-9HG2-350/400-CX5 (CE)

JC-94F2-350/400-OT5 (UL)




# Dynamic Power Sharing Scenarios

Flexible power distribution based on maximum output.  
Distribute electric power freely to increase charging efficiency.

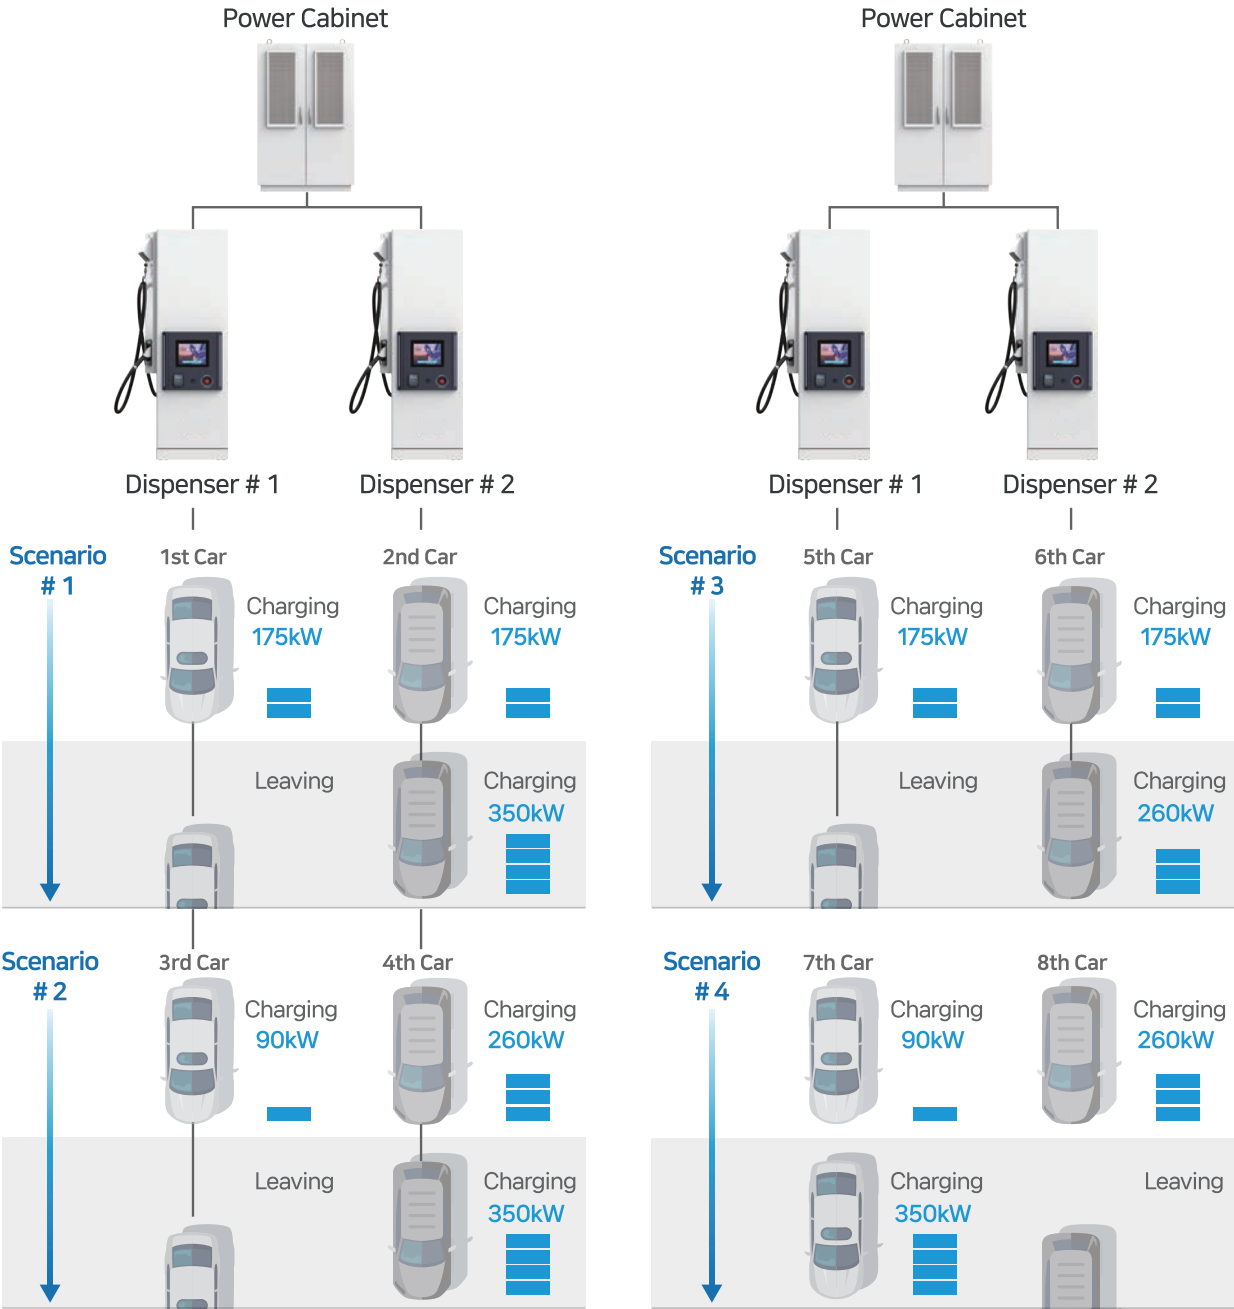

## Configuration

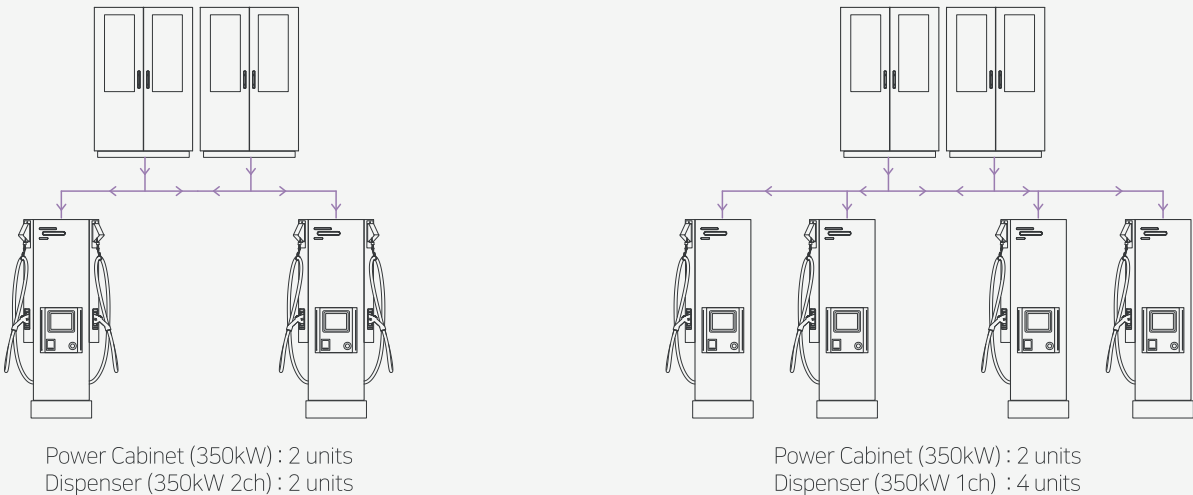

# Specifications

## Dispenser

| Specificaion    |                                  | Dispenser 350kW<br>JC-94F2-350-CX5 (CE)<br>JC-94F2-350-OT5 (UL)                                                 | Dispenser 400kW<br>JC-94F2-400-CX5 (CE)<br>JC-94F2-400-OT5 (UL)                                   |
|-----------------|----------------------------------|-----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| General         | Connector                        | CCS, NACS                                                                                                       |                                                                                                   |
|                 | Communication with EV            | IEC 61851 PLC                                                                                                   |                                                                                                   |
|                 | Display                          | 12.1" LCD Display, Touch screen                                                                                 |                                                                                                   |
|                 | Support language                 | English, French, Spanish (Other languages available upon request)                                               |                                                                                                   |
|                 | Push buttons                     | 1 emergency stop button                                                                                         |                                                                                                   |
|                 | User authentication              | ISO/IEC 14443 A/B Mifare RFID reader, Credit card reader, NFC                                                   |                                                                                                   |
| Electric        | Input                            | DC 1,000V, 240VAC, 60Hz (CE Version)<br>DC 1,000V, 220VAC, 60Hz (UL Version)                                    |                                                                                                   |
|                 | Input   THD                      | < 5%                                                                                                            |                                                                                                   |
|                 | Output (DC Output1)              | Voltage : 150~1,000VDC (Max)<br>Current : 500A(Max)<br>Max power : 350kW<br>(liquid-cooled cable)               | Voltage : 150~1,000VDC (Max)<br>Current : 500A(Max)<br>Max power : 400kW<br>(liquid-cooled cable) |
|                 | Output (DC Output2)              | Voltage : 150~1,000VDC (Max)<br>Current : 500A(Max)<br>Max power : 350kW<br>(liquid-cooled cable)               | Voltage : 150~1,000VDC (Max)<br>Current : 500A(Max)<br>Max power : 400kW<br>(liquid-cooled cable) |
| Environment     | Operating temperature            | -30°C ~ 50°C (-22°F ~ 122°F)                                                                                    |                                                                                                   |
|                 | Humidity                         | < RH95% (Non-condensing)                                                                                        |                                                                                                   |
| Communication   | Network interface                | Ethernet, Cellular, WLAN                                                                                        |                                                                                                   |
|                 | Protocol                         | OCPP1.6J / 2.0.1                                                                                                |                                                                                                   |
| Safety standard | Protection                       | Over voltage, Over current, Short-circuit, Over temperature, Earth leakage, Surge protection, Contactor welding |                                                                                                   |
| Mechanical      | Protection degree                | IP54 (NEMA 3R), IK10                                                                                            |                                                                                                   |
|                 | Cooling                          | Forced air                                                                                                      |                                                                                                   |
|                 | Charging Cable Length (Standard) | 5.5m (18ft) / Adjustable upon request                                                                           |                                                                                                   |
|                 | Dimension                        | 996(W) x 2,098(H) x 432(D) mm (39.2(W) x 82.6(H) x 17(D) inch)                                                  |                                                                                                   |
|                 | Weight                           | 220kg (485lb)                                                                                                   |                                                                                                   |

## Feature highlights



## UPTIME

- Guarantee over 97% uptime requirements
- Uptime : 98.40% per year
- Resolution Period : 0.95 day
- Remote and field service support
- Always up to date with latest standard and protocols

# Specifications

## Power Cabinet

| Specificaion    |                       | Power Cabinet 350kW<br>JC-9HG2-350-CX5 (CE)<br>JC-9502-350-CT5 (UL)                                                                                            | Power Cabinet 400kW<br>JC-9HG2-400-CX5 (CE)<br>JC-9502-400-CT5 (UL)                                                                                            |
|-----------------|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Electric        | Input                 | 3Ø4W, 380VAC, 50/60Hz, Max.385kVA or 440kVA (CE Version)<br>3Ø3W (no neutral), 480VAC, 60Hz, Max.385kVA or 440kVA (UL Version)                                 |                                                                                                                                                                |
|                 | Input   THD           | < 5%                                                                                                                                                           |                                                                                                                                                                |
|                 | Output                | 1CH Voltage : 150~1,000VDC(Max)<br>Current : 500A(Max)<br>Max power : 350kW<br><br>2CH Voltage : 150~1,000VDC(Max)<br>Current : 500A(Max)<br>Max power : 350kW | 1CH Voltage : 150~1,000VDC(Max)<br>Current : 500A(Max)<br>Max power : 400kW<br><br>2CH Voltage : 150~1,000VDC(Max)<br>Current : 500A(Max)<br>Max power : 400kW |
|                 | Power factor          | > 0.98 (Full Scale)                                                                                                                                            |                                                                                                                                                                |
|                 | Charging mode         | CC, CV                                                                                                                                                         |                                                                                                                                                                |
|                 | Voltage accuracy      | ±1.0% (Full Scale)                                                                                                                                             |                                                                                                                                                                |
|                 | Current accuracy      | ±1.0% (Full Scale)                                                                                                                                             |                                                                                                                                                                |
|                 | Max. efficiency       | > 95% (at rated voltage, rated current)                                                                                                                        |                                                                                                                                                                |
|                 | Isolation impedance   | 10MΩ@1,000V                                                                                                                                                    |                                                                                                                                                                |
|                 |                       |                                                                                                                                                                |                                                                                                                                                                |
| Environment     | Operating temperature | -30℃~50℃ (-22°F~122°F with derating)                                                                                                                           |                                                                                                                                                                |
|                 | Humidity              | < RH95% (Non-condensing)                                                                                                                                       |                                                                                                                                                                |
| Safety standard | Protection            | Over voltage, Over current, Short-circuit, Over temperature,<br>Earth leakage, Surge protection, Contactor welding                                             |                                                                                                                                                                |
| Mechanical      | Protection degree     | IP54 (NEMA 3R), IK10                                                                                                                                           |                                                                                                                                                                |
|                 | Cooling               | Forced air                                                                                                                                                     |                                                                                                                                                                |
|                 | Dimension             | 1234(W) x 1,882(H) x 983(D) mm (48.6(W) x 74.1(H) x 38.7(D) inch)                                                                                              |                                                                                                                                                                |
|                 | Weight                | 980kg (2,160lb)                                                                                                                                                |                                                                                                                                                                |

