

HIGHLY EFFICIENT SOFT MOUNTED WASHER EXTRACTORS



FX 180	FX 240	FX 280
18KG	24KG	28KG
40LB	53LB	62LB



FEATURES

- Freestanding, high spin (up to 1047 rpm FX180)
- 400 G extraction speed (FX180, FX240)
- Stainless steel drum and tub
- Cascade Drum
- Patented soap hopper
- High capacity water inlets (FX280)
- Large drain valve (Ø 76 mm)
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading

OPTIONS

- Prep for coin and Central Pay
- Anthracite grey painted panels
- Stainless steel front and side panels
- USB + RS485 plug
- Liquid soap connection
- Liquid soap pumps
- Steam heating version
- High capacity water inlets (FX180, FX240)
- ECO version: lower kW rating on request
- 3rd water inlet

XTRONIC CONTROL

- 6 programs (+2 cycle modifiers)
- Programmable content
- NFC communication
- Imbalance detection
- 4 Soap signals
- Delayed start for OPL





º-TRace°



ERGONOMIC CONSTRUCTION




LARGE DOOR OPENING





TYPE		EV400	EV240	EV200
TYPE		FX180	FX240	FX280
INNERDRUM		00 (4.4)	07//0)	04 ((0)
Capacity 1:09	kg (lb)	20 (44)	27 (60)	31 (68)
Capacity 1:10	kg (lb)	18 (40)	24 (53)	28 (62)
Volume	litres	180	240	280
Diameter	mm	750	750	750
DRUM SPEED				
Wash	rpm	42	42	42
Extraction	rpm	980	980	915
G-FACTOR		400	400	350
HEATING				
Electricity	kW			
very low-low-std-higher-special 1				
v-2-3		std 12-higher 18	low 12ª- std 18	std 21,9
Steam	bar	1-8	1-8	1-8
Hot water	°C	85	85	85
Sound pressure level	dB (A)	< 68	< 66	< 70
Water valves connection	BSP	3/4"	3/4"	3/4"
Water pressure	kPa	100-600	100-600	100-600
Rec. water pressure	kPa	300-500	300-500	300-500
Water inlet	l/min	20	20	20-50
Drain valve	outer Ø mm	76	76	76
Flow amount with drain valve	l/min	210	210	210
Steam valve connection	BSP	1/2"	1/2"	1/2"
Steam pressure	kPa	100-800	100-800	100-800
DIMENSIONS				
Size H×W×D	mm	1430×970×970	1430×970×1105	1430×970×1185
Net weight	kg	380	430	495
TRANSPORT DATA				
Packed H×W×D	mm	1570×1025×1015	1570×1025×1150	1570×1025×1225
Gross weight	kg	395	450	515
0.000 110.0110	1,8	575	150	515

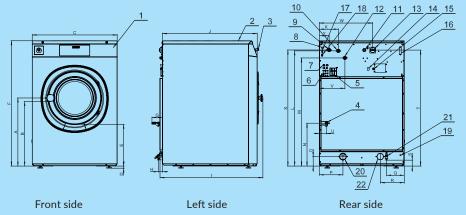

- Control panel
- Soap dispenser Central stop button
- Steam connection
- Air relieve
- Liquid soap connection
- Recycle water inlet
- Recycled water valve cable inlet
- Cold water inlet, soft Cold water inlet, hard
- Electrical connection
- Hot water inlet
- Main switch
- Heating change-over switch
- Liquid soap pump

- electrical connection Fuses
- USB port optional
- PC programming connection
- Discharge water cable inlet
- 20. Drain valve 3 in. [76 mm]
- 21. Drain valve 1/2 in. (applicable for wash bath sample-on request only)
- Drain valve or recycle valve 3 in. [76 mm]

DIMENSIONS

	Α	В	С	D	Е	F	G	Н	- 1	J	K	L	М	Ν	0	Р	Q	R	S	Т	U	V	W	Χ	Υ
FX180	806	758	970	24	477	1430	90	48	970	871,5	1325	1314	1235	490	108.5	270	203	-	67	1315	80	293	610	218	113
FX240	806	758	970	24	477	1430	90	48	1105	1006,5	1325	1314	1235	490	108.5	270	203	274	67	1311	80	293	610	218	113
FX280	806	758	970	24	477	1430	90	48	1185	1082	1325	1314	1235	490	108.5	270	203	274	67	1311	80	293	610	218	113
			width			height			depth																