

HIGH EFFICIENT RIGID MOUNTED **INDUSTRIAL WASHER EXTRACTORS**

RANGE

RX 350	RX 520
33KG	52KG
73LB	115LB



FEATURES

- Rigid mounted, normal spin, 100G factor
- Stainless steel drum and tub
- Patented soap hopper
- High capacity water inlets
- Large drain valve (2 x Ø 76 mm)
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading

OPTIONS

- Anthracite grey painted panels
- Stainless steel front and side panels
- Prep for coin and Central Pay
- USB plug (on the back panel)
- Liquid soap connection
- Liquid soap pumps
- Steam heating version
- ECO version: lower kW rating on request
- 3rd water inlet

XTRONIC CONTROL

- 6 programs (+2 cycle modifiers)
- Programmable content
- NFC communication
- Imbalance detection
- 4 Soap signals
- Delayed start for OPL








ERGONOMIC LARGE DOOR **OPENING**



IOW WATER AND ENERGY CONSUMPTION

TYPE		RX350	RX520
INNERDRUM			
Capacity 1:09	kg (lb)	37(82)	58(128)
Capacity 1:10	kg (lb)	33(73)	52(115)
Volume	litres	332	520
Diameter	mm	914	914
DRUM SPEED			
Wash	rpm	38	38
Extraction	rpm	540	440
G-FACTOR		150	100
HEATING			
Electricity	kW	27	40,6
Steam	bar	1 - 8	1 - 8
Hot water	°C	85	85
Sound pressure level	dB (A)	< 65	< 65
Water valves connection	BSP	3/4"	1"
Water pressure	kPa	100-600	100-600
Rec. water pressure	kPa	300-500	300-500
Water inlet	l/min	66-188	183-518
Drain valve	outer Ø mm	2x76	2x76
Flow amount with drain valve	l/min	2x210	2x210
Steam valve connection	BSP	3/4"	3/4"
Steam pressure	kPa	100-800	100-800
DIMENSIONS			
Size H×W×D	mm	1500×1060×1030	1500×1060×1315
Net weight	kg	410	520
TRANSPORT DATA			
Packed H×W×D	mm	1700×1100×1100	1700×1100×1385
Gross weight	kg	450	570

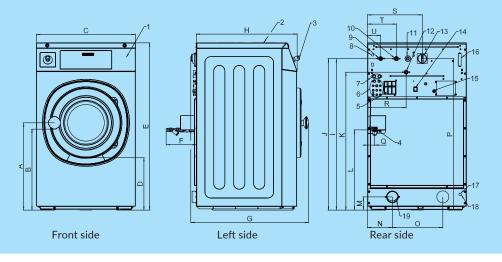

- Control panel
- Soap dispenser Central stop button
- Steam connection
- Air relieve
- Liquid soap connection
- Recycled water inlet
 Recycled water valve cable inlet
- Cold water inlet, soft
- Cold water inlet, hard
- Electrical connection
- Hot water inlet 12.
- Main switch
- Heating change-over switch
- Liquid soap pump electrical connection 15.
- Fuses
- 17. Discharge water cable inlet
- Drain valve or recycle valve 3 in. [76 mm] 18.
- Drain valve 3 in. [76 mm]

DIMENSIONS

	Α	В	С	D	E	F	G	Н			K	L	М	N	Р	Q	R	S
RX80	588	540	660	349	1115	202	785	675	1025	1010	920	535	88	166	1010	48	258	365
RX105	625	577	750	342	1225	216	785	675	1120	1120	1030	480	98	225	1120	48	293	453
RX135	625	577	750	342	1225	216	900	790	1120	1120	1030	480	98	225	1120	48	293	453
			width		height		depth		-									