

## HIGH EFFICIENT RIGID MOUNTED INDUSTRIAL WASHER EXTRACTORS

**RX**  
RANGE

**RX 80**

7,5KG  
16LB

**RX 105**

10,5KG  
23LB

**RX 135**

13,5KG  
30LB



### FEATURES

- Rigid mounted, normal spin, up to 200G factor
- Stainless steel drum and tub
- Patented soap hopper
- Large drain valve (Ø 76 mm)
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading

### OPTIONS

- Anthracite grey painted panels
- Stainless steel front and side panels
- Prep for coin and Central Pay
- USB plug (on the back panel)
- Liquid soap connection
- Liquid soap pumps
- Steam heating version
- Drain pump (RX80)
- ECO version: Lower kW rating on request
- 3<sup>rd</sup> water inlet

### XTRONIC CONTROL

- 6 programs (+2 cycle modifiers)
- Programmable content
- NFC communication
- Imbalance detection
- 4 Soap signals
- Delayed start for OPL



ERGONOMIC  
CONSTRUCTION




LARGE DOOR  
OPENING



LOW WATER  
AND ENERGY  
CONSUMPTION

TYPE		RX80	RX105	RX135
<b>INNERDRUM</b>				
Capacity 1:09	kg (lb)	8(18)	12(26)	15(33)
Capacity 1:10	kg (lb)	7,5(16)	10,5(23)	13,5(30)
Volume	litres	75	105	135
Diameter	mm	530	620	620
<b>DRUM SPEED</b>				
Wash	rpm	50	46	46
Extraction	rpm	820	760	760
<b>G-FACTOR</b>				
		200	200	200
<b>HEATING</b>				
ELECTRICITY	kW	3-4,6-6-9--7--	3---9-12-6-7--	3---12-13,8-6-7-9
very low-low-std-higher-special 1 -2-3				
Steam	bar	1 - 8	1 - 8	1 - 8
Hot water	°C	85	85	85
Sound pressure level	dB (A)	53	53	65
Water valves connection	BSP	3/4"	3/4"	3/4"
Water pressure	kPa	100-600	100-600	100-600
Rec. water pressure	kPa	300-500	300-500	300-500
Water inlet	l/min	20	20	20
Drain valve	outer Ø mm	76	76	76
Flow amount with drain valve	l/min	210	210	210
Steam valve connection	BSP	1/2"	1/2"	1/2"
Steam pressure	kPa	100-800	100-800	100-800
<b>DIMENSIONS</b>				
Size H×W×D	mm	1115×660×785	1225×750×785	1225×750×900
Net weight	kg	135	170	190
<b>TRANSPORT DATA</b>				
Packed H×W×D	mm	1245×710×835	1355×800×835	1355×800×950
Gross weight	kg	145	185	200

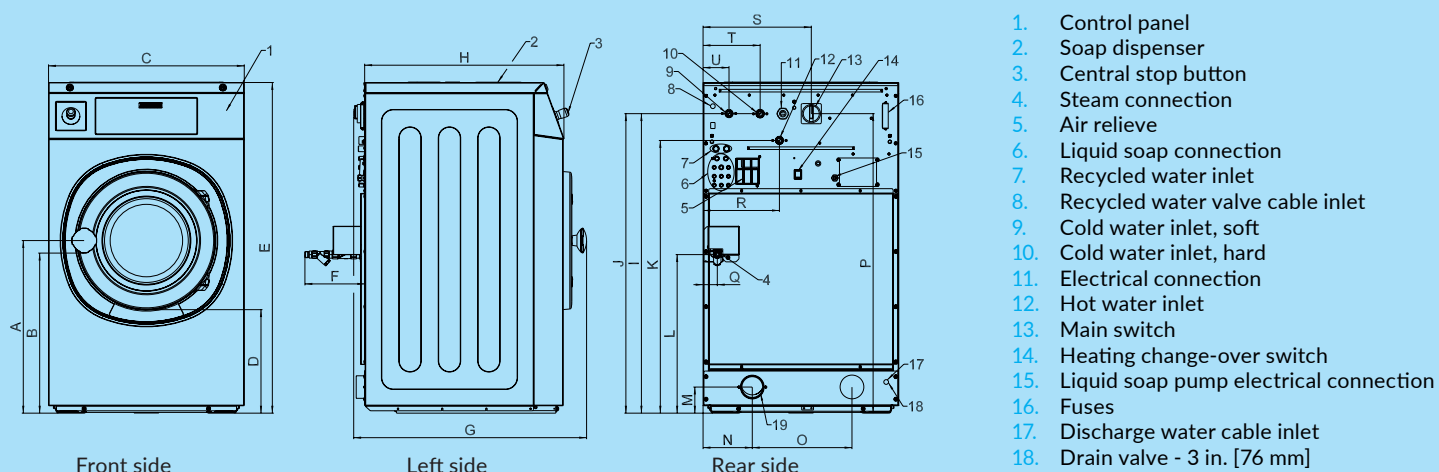

## DIMENSIONS

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	Q	R	S
RX80	588	540	660	349	1115	202	785	675	1025	1010	920	535	88	166	1010	48	258	365
RX105	625	577	750	342	1225	216	785	675	1120	1120	1030	480	98	225	1120	48	293	453
RX135	625	577	750	342	1225	216	900	790	1120	1120	1030	480	98	225	1120	48	293	453
	width				height		depth											

RX80		
Water consumption	l/kg	6,9
Electricity consumption	kWh/kg	0,17

\* Program No 11

The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.  
[www.primuslaundry.com](http://www.primuslaundry.com)

Primus by Alliance Laundry Systems