

HIGH EFFICIENT RIGID MOUNTED INDUSTRIAL WASHER EXTRACTORS

RX
RANGE

RX 180

18KG
40LB

RX 240

24KG
53LB

RX 280

28KG
62LB



FEATURES

- Rigid mounted, normal spin, 100G factor
- Stainless steel drum and tub
- Patented soap hopper
- High capacity water inlets (RX280)
- Large drain valve (Ø 76 mm)
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading

OPTIONS

- 200G factor execution
- Anthracite grey painted panels
- Stainless steel front and side panels
- USB plug (on the back panel)
- Prep for coin and Central Pay
- Liquid soap connection
- Liquid soap pumps
- Steam heating version
- High capacity water inlets (RX180, RX240)
- ECO version : lower kW rating on request
- 3rd water inlet

XTRONIC CONTROL

- 6 programs (+2 cycle modifiers)
- Programmable content
- NFC communication
- Imbalance detection
- 4 Soap signals
- Delayed start for OPL



ERGONOMIC
CONSTRUCTION




LARGE DOOR
OPENING



LOW WATER
AND ENERGY
CONSUMPTION

TYPE		RX180	RX240	RX280
INNERDRUM				
Capacity 1:09	kg (lb)	20(44)	27(60)	31(68)
Capacity 1:10	kg (lb)	18(40)	24(53)	28(62)
Volume	litres	180	240	280
Diameter	mm	750	750	750
DRUM SPEED				
Wash	rpm	42	42	42
Extraction	rpm	490 (690)*	490 (690)*	490 (690)*
G-FACTOR				
		100 (standard) 200*	100 (standard) 200*	100 (standard) 200*
HEATING				
ELECTRICITY (KW) very low-low-std-higher-special 1 -2-3	kW	-----std 12 - higher 18-----	-----std 18-----	-----std 21,9-----
Steam	bar	1-8	1-8	1-8
Hot water	°C	85	85	85
Sound pressure level	dB (A)	< 65	< 65	< 65
Water valves connection	BSP	3/4"	3/4"	3/4"
Water pressure	kPa	100-600	100-600	100-600
Rec. water pressure	kPa	300-500	300-500	300-500
Water inlet	l/min	20	20	20
Drain valve	outer Ø mm	76	76	76
Flow amount with drain valve	l/min	210	210	210
Steam valve connection	BSP	1/2"	1/2"	1/2"
Steam pressure	kPa	100-800	100-800	100-800
DIMENSIONS				
Size H×W×D	mm	1410×890×915	1410×890×1060	1410×890×1135
Net weight	kg	255 (315)*	275 (330)*	290 (355)*
TRANSPORT DATA				
Packed H×W×D	mm	1550×925×970	1550×925×1130	1550×925×1190
Gross weight	kg	270 (335)*	290 (355)*	305 (385)*

* 200 G-factor execution

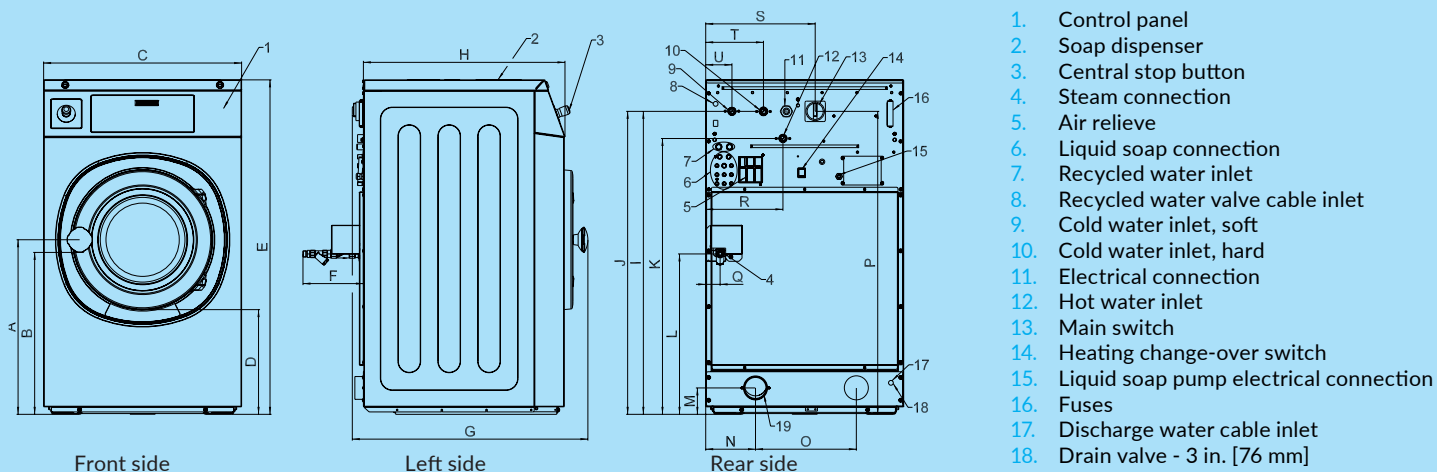

DIMENSIONS

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	Q	R	S
RX80	588	540	660	349	1115	202	785	675	1025	1010	920	535	88	166	1010	48	258	365
RX105	625	577	750	342	1225	216	785	675	1120	1120	1030	480	98	225	1120	48	293	453
RX135	625	577	750	342	1225	216	900	790	1120	1120	1030	480	98	225	1120	48	293	453
	width			height			depth											

The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.
www.primuslaundry.com

Primus by Alliance Laundry Systems