

HIGHLY EFFICIENT SOFT MOUNTED WASHER EXTRACTORS

FX
RANGE

FX65	FX 80	FX105	FX135
6,5KG 14LB	7,5KG 17LB	10,5KG 23LB	13,5KG 30LB



FEATURES

- Freestanding, high spin (up to 1165 rpm - FX65,FX80)
- 400G extraction speed
- Cascade Drum
- Stainless steel drum and tub
- Patented soap hopper
- Large drain valve (Ø 76 mm)
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading

OPTIONS

- Prep for coin and Central Pay
- Anthracite grey painted panels
- Stainless steel front and side panels
- USB + RS485 plug
- Liquid soap connection
- Liquid soap pumps
- Steam heating version
- ECO version: lower kW rating on request
- 3rd water inlet

XTRONIC CONTROL

- 6 programs (+2 cycle modifiers)
- Programmable content
- NFC communication
- Imbalance detection
- 4 Soap signals
- Delayed start for OPL



ERGONOMIC
CONSTRUCTION




LARGE DOOR
OPENING



LOW WATER
AND ENERGY
CONSUMPTION

TYPE		FX65	FX80	FX105	FX135
INNERDRUM					
Capacity 1:09	kg (lb)	7 (15)	8,5 (19)	12 (26)	15 (33)
Capacity 1:10	kg (lb)	6,5 (14)	7,5 (17)	10,5 (23)	13,5 (30)
Volume	litres	65	75	105	135
Diameter	mm	530	530	620	620
DRUM SPEED					
Wash	rpm	49	49	49	49
Extraction	rpm	1165	1165	1075	1075
G-FACTOR					
		400	400	400	400
HEATING					
Electricity	kW				
very low-low-std-higher-special 1 -2-3		3-4,6-6-9--7--	3-4,6-6-9--7--	3---9-12-6-7--	3---12-13,8--7-9
Steam	bar	1 - 8	1 - 8	1 - 8	1 - 8
Hot water	°C	85	85	85	85
Sound pressure level	dB (A)	< 59	< 63	< 66	< 65
Water valves connection	BSP	3/4"	3/4"	3/4"	3/4"
Water pressure	kPa	100-600	100-600	100-600	100-600
Rec. water pressure	kPa	300-500	300-500	300-500	300-500
Water inlet	l/min	20	20	20	20
Drain valve	outer Ø mm	76	76	76	76
Flow amount with drain valve	l/min	210	210	210	210
Steam valve connection	BSP	1/2"	1/2"	1/2"	1/2"
Steam pressure	kPa	100-800	100-800	100-800	100-800
DIMENSIONS					
Size H×W×D	mm	1135×710×740	1135×710×790	1245×795×795	1245×795×945
Net weight	kg	170	185	210	255
TRANSPORT DATA					
Packed H×W×D	mm	1265×750×840	1265×750×840	1365×835×840	1335×835×985
Gross weight	kg	180	200	235	275

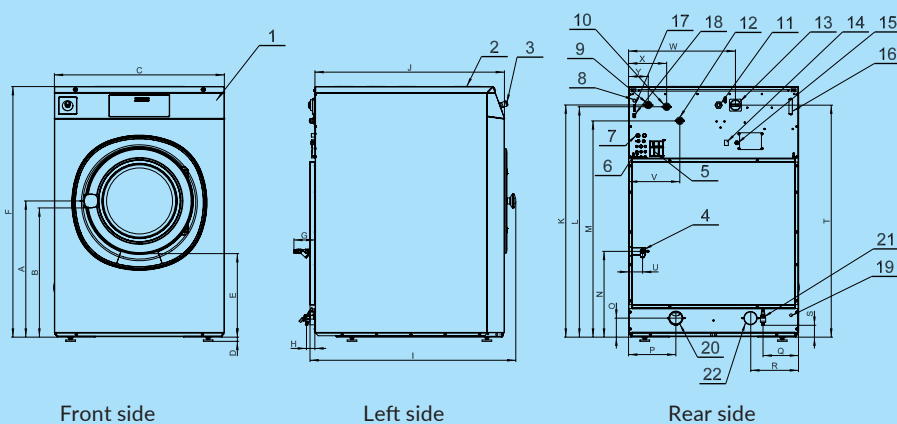

1. Control panel
2. Soap dispenser
3. Central stop button
4. Steam connection
5. Air relieve
6. Liquid soap connection
7. Recycle water inlet
8. Recycled water valve cable inlet
9. Cold water inlet, soft
10. Cold water inlet, hard
11. Electrical connection
12. Hot water inlet
13. Main switch
14. Heating change-over switch
15. Liquid soap pump
16. electrical connection
17. Fuses
18. USB port - optional
19. PC programming connection
20. Discharge water cable inlet
21. Drain valve - 3 in. [76 mm]
22. Drain valve - 1/2 in. (applicable for wash bath sample-on request only)

DIMENSIONS

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	S	T	U	V	W	X	Y
FX65	612	564	710	24	349	1135	180	48	740	641,5	1030	1030	940	480	88	230	203	67	1030	42	293	390	218	113
FX80	612	564	710	24	349	1135	180	48	790	691,5	1030	1030	940	480	88	230	203	67	1030	42	293	390	218	113
FX105	648	600	795	24	342	1245	180	48	795	691,5	1140	1140	1050	506	88	230	203	67	1140	42	293	475	218	113
FX135	648	600	795	24	342	1245	180	48	945	841,5	1140	1140	1050	506	88	230	203	67	1140	42	293	475	218	113
			width			height			depth															

FX80		
Water consumption	l/kg	6,6
Electricity consumption	kWh/kg	0,18

* Program No 11

The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.
www.primuslaundry.com

Primus by Alliance Laundry Systems