


```
Switch>
enable
config t
  interface fa0/10
    switchport mode access
    switchport access vlan 10
  exit
  interface fa0/11
    switchport mode access
    switchport access vlan 10
  exit
  interface fa0/20
    switchport mode access
    switchport access vlan 20
  exit
  interface fa0/21
    switchport mode access
    switchport access vlan 20
  exit
```


1

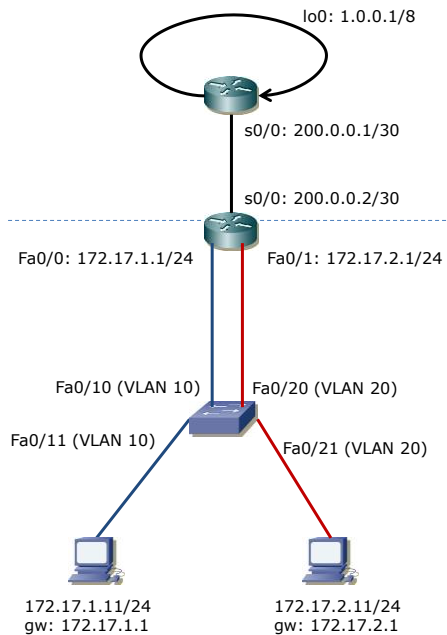


```
Router>
enable
config t
  interface fa0/0
    ip address 172.17.1.1 255.255.255.0
    no shutdown
  exit
  interface fa0/1
    ip address 172.17.2.1 255.255.255.0
    no shutdown
  exit
  interface s0/0
    ip address 200.0.0.2 255.255.255.252
    clock rate 64000
    no shutdown
  end

Swiat>
enable
config t
  interface s0/0
    ip address 200.0.0.1 255.255.255.252
    clock rate 64000
    no shutdown
  interface loopback 0
    ip address 1.0.0.1 255.0.0.0
```

2

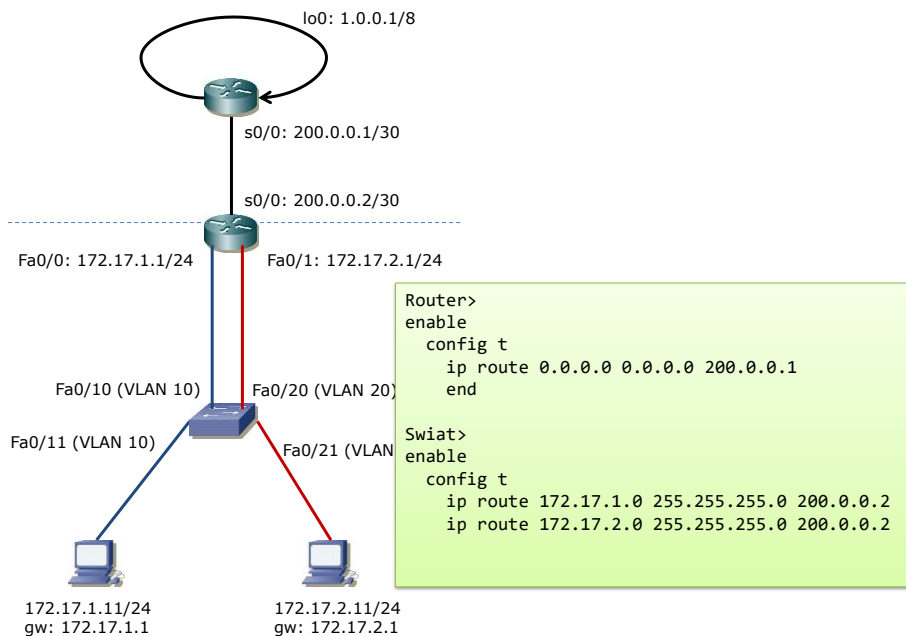

3

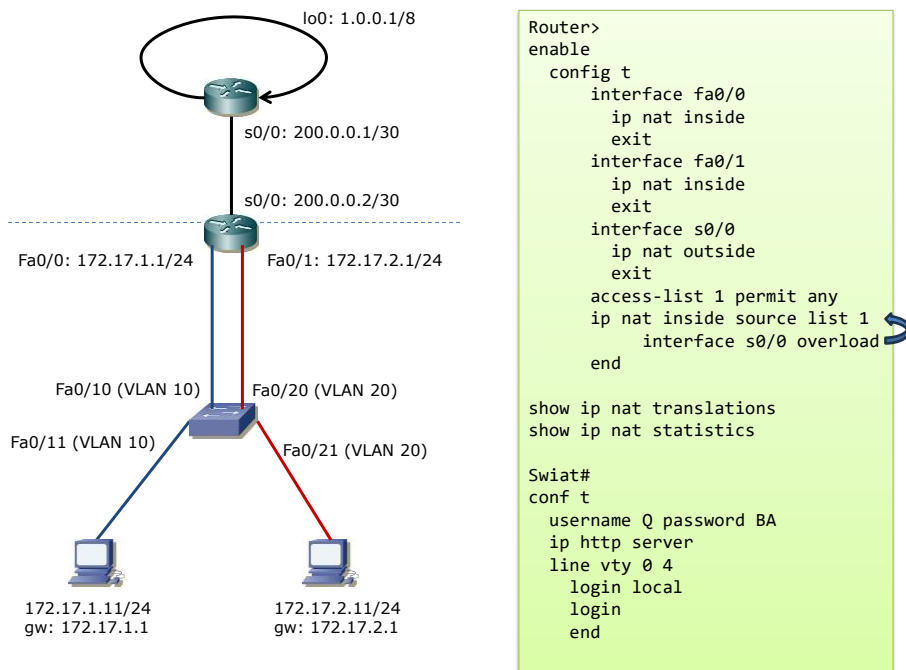

4