



Trouser - Pattern Piece Overview (1/2)

Each piece is fitted independently. NOT TO SCALE - never cut from this overview.
POM names and size values are listed on the Measurement Spec page.


01 - TROUSER FRONT LEFT

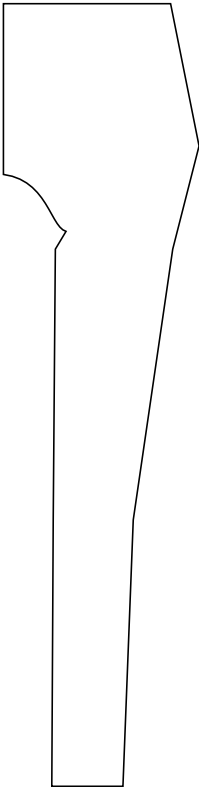


02 - TROUSER FRONT RIGHT

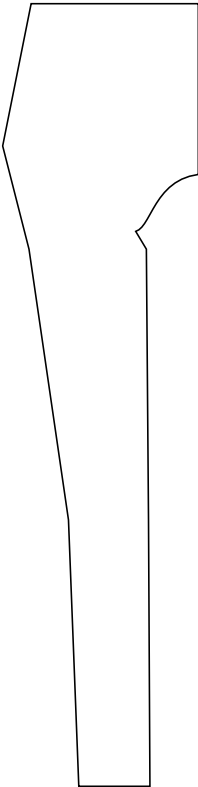

03 - TROUSER BACK LEFT




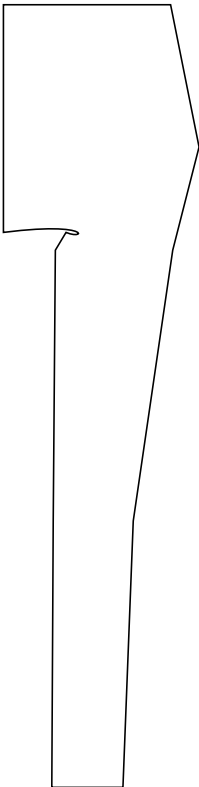


04 - TROUSER BACK RIGHT

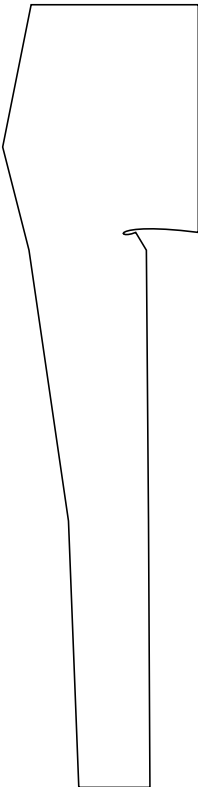

Trouser - Pattern Piece Overview (2/2)

Each piece is fitted independently. NOT TO SCALE - never cut from this overview.
POM names and size values are listed on the Measurement Spec page.

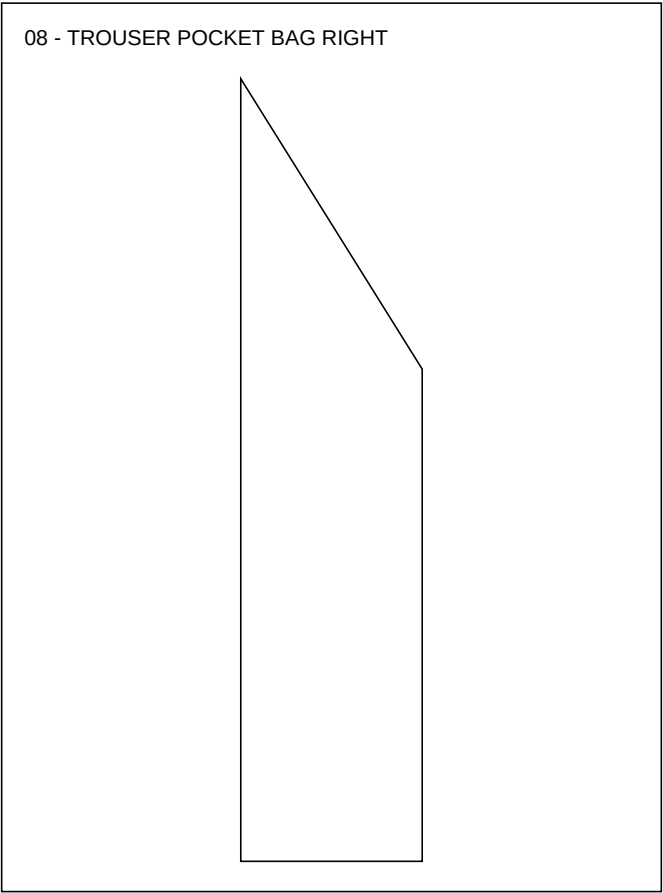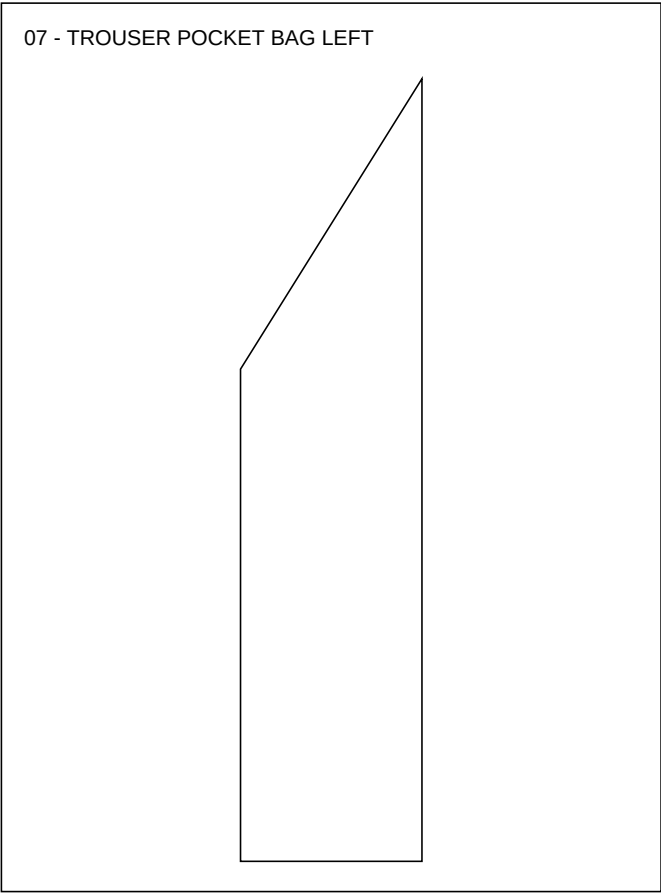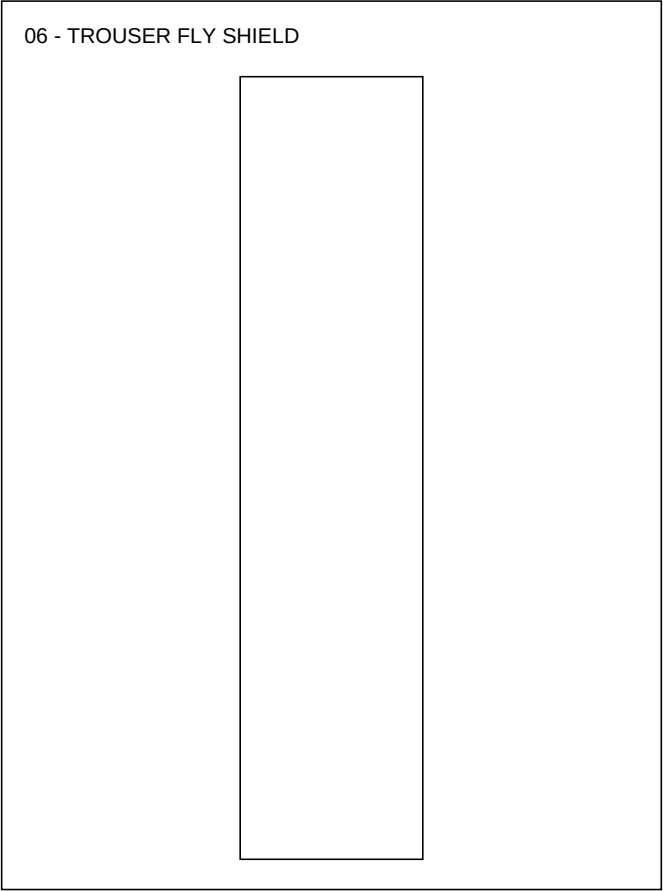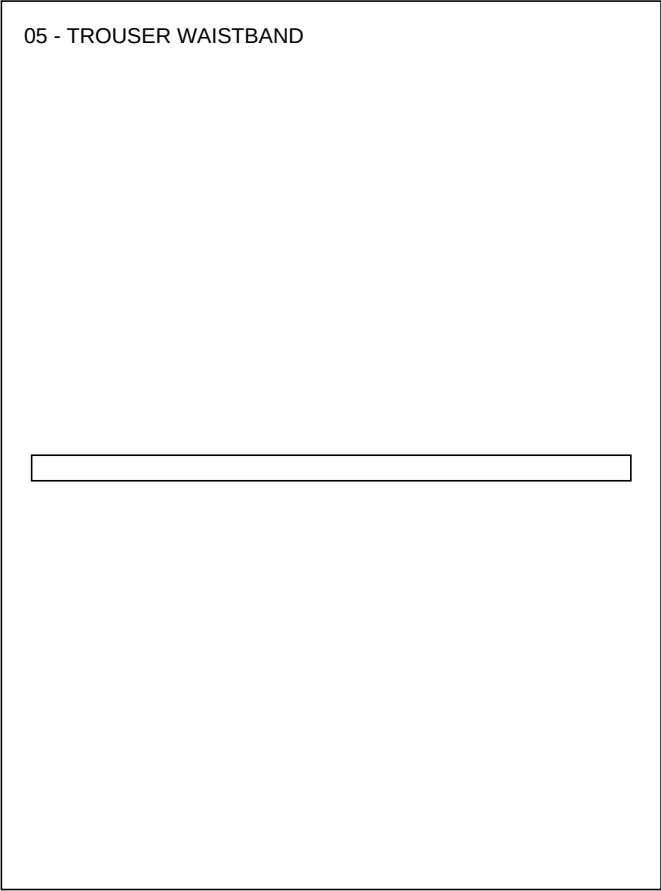

Measurement Spec (cm)

	Tol +/-	XS	S	M	L	XL
Waist (finished)	1.0	86.0	90.0	94.0	98.0	102.0
Waistband depth (finished)	0.2	4.0	4.0	4.0	4.0	4.0
Seat / hip (finished)	1.3	102.0	106.0	110.0	114.0	118.0
Hip depth (body reference)	0.5	18.0	19.0	20.0	21.0	22.0
Front rise (finished incl. waistband)	0.8	26.0	27.0	28.0	29.0	30.0
Back rise (finished incl. waistband)	0.8	34.0	35.0	36.0	37.0	38.0
Thigh (finished)	0.8	62.0	64.0	66.0	68.0	70.0
Knee (finished)	0.8	42.0	43.5	45.0	46.5	48.0
Inseam (finished seam)	1.0	75.4	76.9	78.4	79.9	81.4
Outseam (finished incl. waistband)	1.0	110.2	112.7	115.3	117.8	120.4
Leg opening (finished)	0.8	40.0	40.0	40.0	40.0	40.0
Front fly length (finished)	0.3	15.0	15.0	15.0	15.0	15.0
Left pocket opening (finished)	0.4	16.0	16.0	16.0	16.0	16.0
Right pocket opening (finished)	0.4	16.0	16.0	16.0	16.0	16.0
Pocket bag depth (finished)	0.5	23.0	23.0	23.0	23.0	23.0
Pocket bag width (finished)	0.5	8.5	8.5	8.5	8.5	8.5
Pocket drop (finished placement)	0.5	2.0	2.0	2.0	2.0	2.0

Bill of Materials

Material	Placement	Qty
Midweight woven fabric	Four leg panels, waistband & pocket bags	1.8 m
Lightweight fusible interfacing	Waistband & fly shield	0.25 m
Trouser zipper	Front fly	1
Hook-and-bar fastening	Waistband	1 set
All-purpose sewing thread	All seams and topstitching	1 spool

Construction

1. Fuse the waistband and fly-support areas according to the selected woven fabric instructions.
2. Sew each pocket bag to its marked front opening; turn, press, and secure the bag edge inside the front panel.
3. Join each front leg to its matching back leg at the side seam, matching the side balance notches.
4. Sew the front and back inseams, then close the centre-back seam between the two back panels.
5. Install the zipper behind the marked front fly and secure the fly shield and waistband fastening.
6. Join the separate waistband to the four-leg waist perimeter, matching centre and closure marks.
7. Press the seams, turn up the deeper hem allowance, and inspect the pocket openings and waistband ends.

Trouser - Fit Record

Sew the sample size, measure the finished garment, write the actual value in cm.

Fabric: _____ Sewn by: _____ Date: _____

Point of measure	Tol +/-	Predicted	Actual	Pass?
Waist (finished)	1.0	94.0 cm	_____	_____
Waistband depth (finished)	0.2	4.0 cm	_____	_____
Seat / hip (finished)	1.3	110.0 cm	_____	_____
Hip depth (body reference)	0.5	20.0 cm	_____	_____
Front rise (finished incl. waistband)	0.8	28.0 cm	_____	_____
Back rise (finished incl. waistband)	0.8	36.0 cm	_____	_____
Thigh (finished)	0.8	66.0 cm	_____	_____
Knee (finished)	0.8	45.0 cm	_____	_____
Inseam (finished seam)	1.0	78.4 cm	_____	_____
Outseam (finished incl. waistband)	1.0	115.3 cm	_____	_____
Leg opening (finished)	0.8	40.0 cm	_____	_____
Front fly length (finished)	0.3	15.0 cm	_____	_____
Left pocket opening (finished)	0.4	16.0 cm	_____	_____
Right pocket opening (finished)	0.4	16.0 cm	_____	_____
Pocket bag depth (finished)	0.5	23.0 cm	_____	_____
Pocket bag width (finished)	0.5	8.5 cm	_____	_____
Pocket drop (finished placement)	0.5	2.0 cm	_____	_____