


BUS X1 DIN 41612 (YACC1 V3.2)

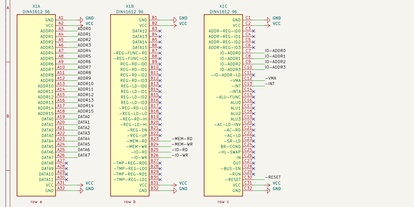


BOARD SELECT ($D000 BLOCK) + TEXT RAM $D000–$D7FF

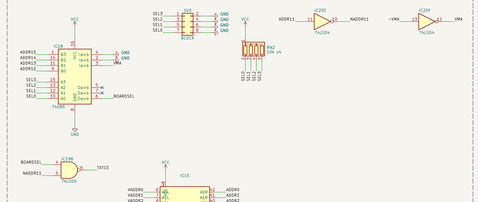


PORTS PA–PE: 6845 (PA/PB), CONTROL + STATUS (PC)

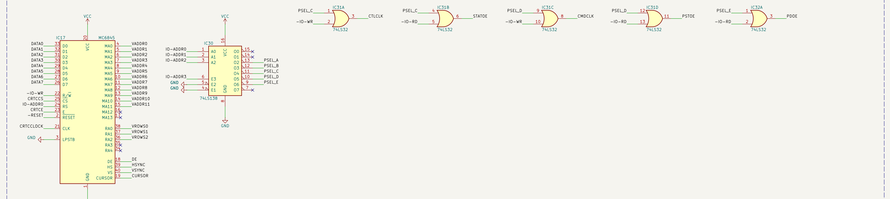


POWER UNITS + DECOUPLING

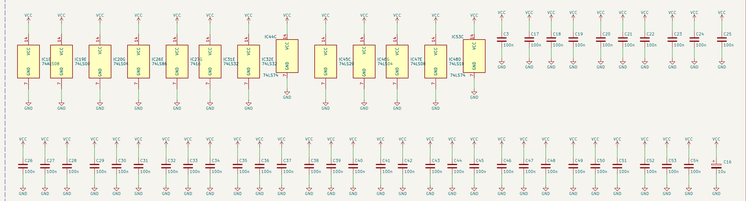


CLOCKS + CHARACTER PIPELINE (DOTS: 6 OR 8 DOTS A CHARACTER)

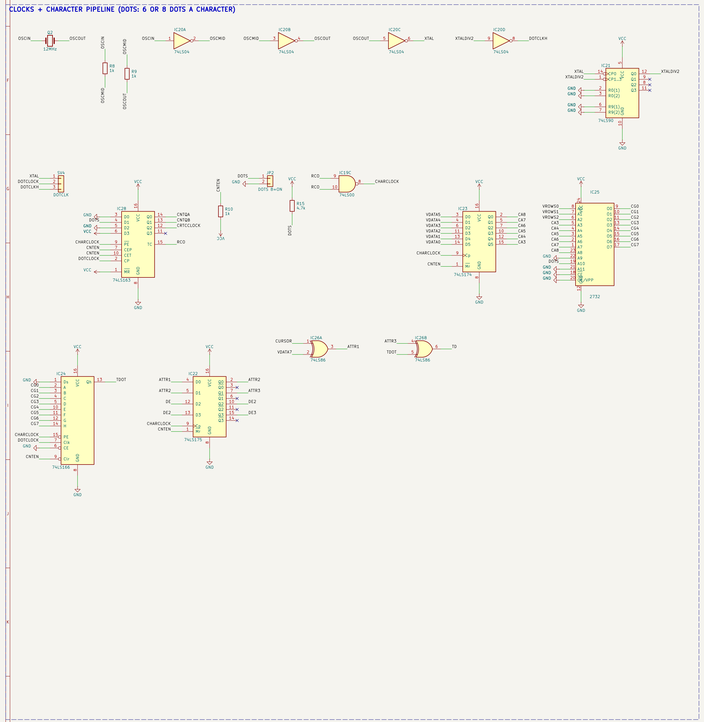


GRAPHICS RAM $0800–$DFFF: SLOT LOGIC (QC: CPU / DISPLAY HALF)

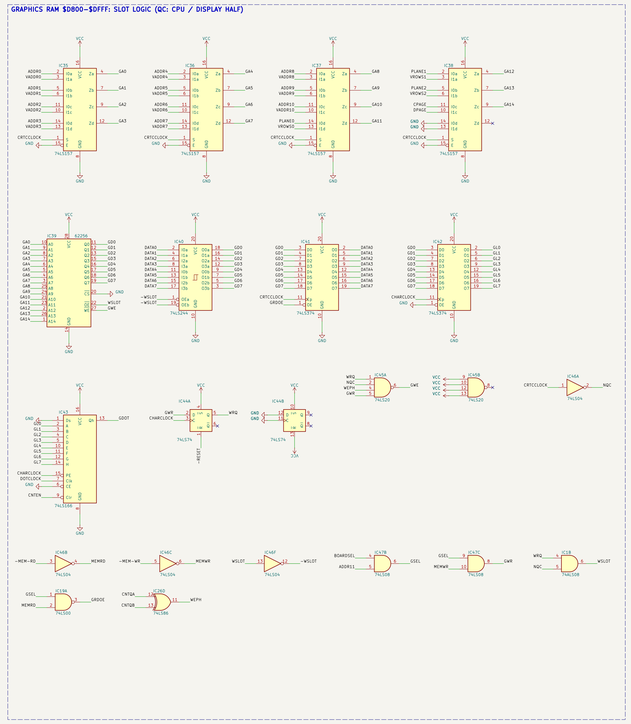

DOT COMBINE + VIDEO OUT

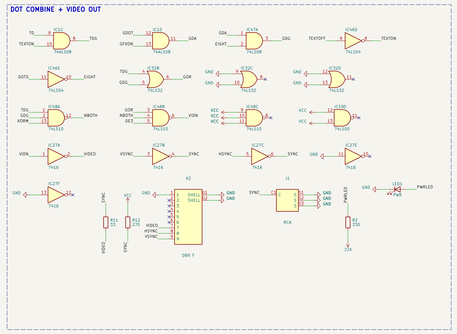

PS/2: ATMEGA328P + LATCHES (PD, PE), INT

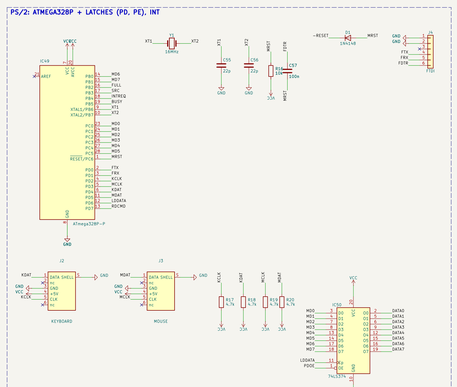

PWR_FLAGs: the bus supplies VCC and GND (X1, six pins each).

Design note: BACKLOG.md Video card V2.0; theory: docs/cards/video.md
Circuit source: v2ti_netlist.py; this sheet is generated by gen_v20.py
Text + graphics (8-dot mode), 68k65 and every register on ports PA–PE, PS/2 keyboard and mouse
YACC1
Sheet: /
File: video-v2.0/kicad_sch
Title: YACC1 video card V2.0
Size: A0 | Date: 2026-10-22 | Rev: V2.0
KiCad 8.0.4, 10.0.0 | ID: 1/1