


BUS X1 DIN 41612 (YACC1 V3.2)

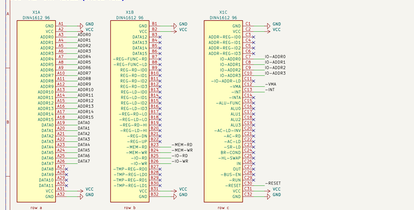


BOARD SELECT ($D000 BLOCK) + TEXT RAM $D000–$D7FF

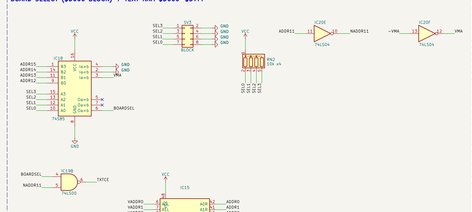


PORTS PA–PE: 6845 (PA/PB), CONTROL + STATUS (PC)

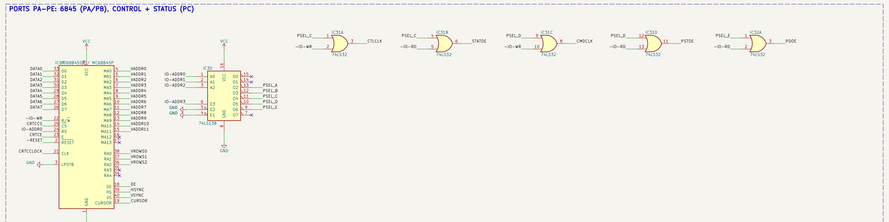


POWER UNITS + DECOUPLING

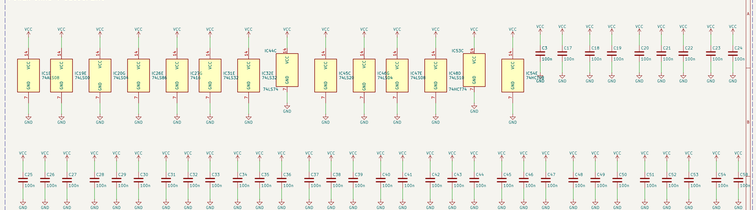


CLOCKS + CHARACTER PIPELINE (DOTS: 6 OR 8 DOTS A CHARACTER)

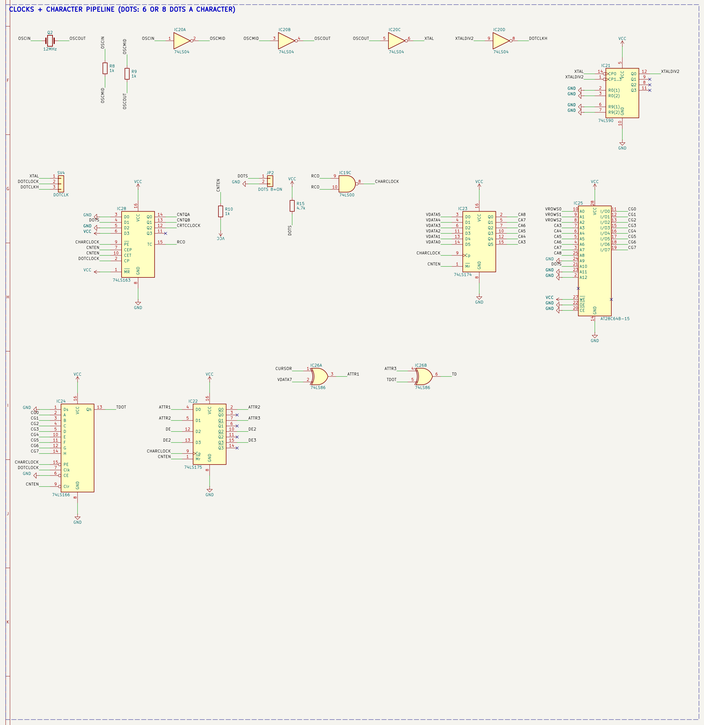


GRAPHICS RAM $0800–$DFFF: SLOT LOGIC (GFX-ON = 1) / DIRECT MODE (GFX-ON = 0)

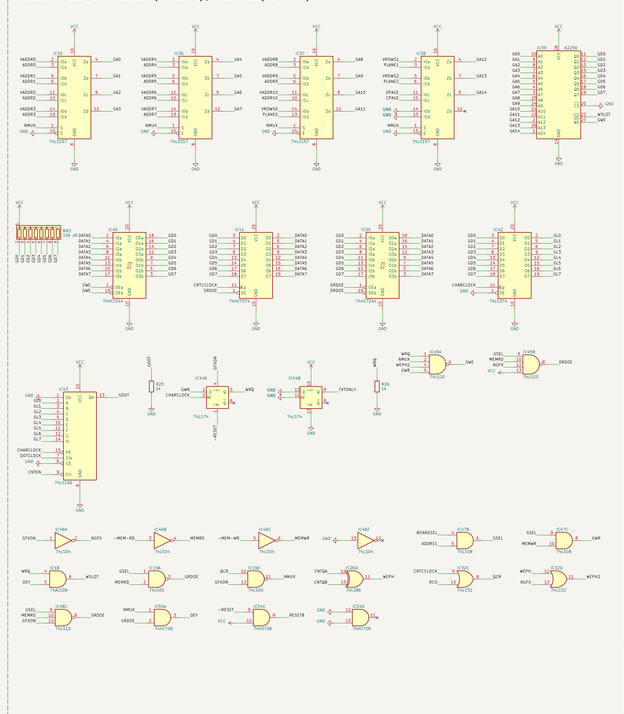

DOT COMBINE + VIDEO OUT

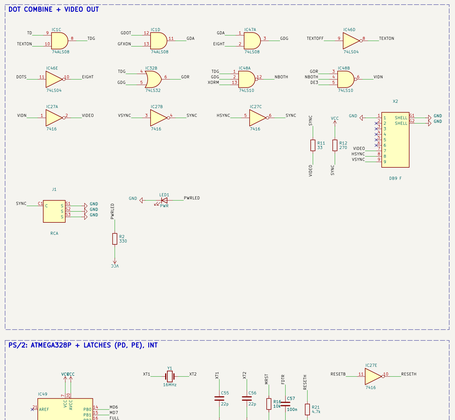

PS/2: ATMEGA328P + LATCHES (PD, PE), INT

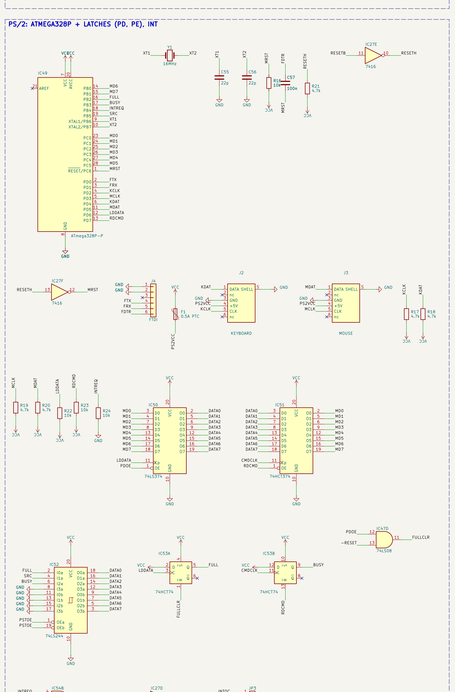

PWR_FLAGs: the bus supplies VCC and GND (X1, six pins each).



Design note: BACKLOG.md Video card V2.0; theory: docs/cards/video.md
Circuit source: v25_netlist.py this sheet is generated by gen_v20.py
Text + graphics (8×dot mode), 68k45 and every register on ports PA–PF, PS/2 keyboard and mouse

YACC1	
Sheet: /	
File: video-v2.0.kicad_sch	
Title: YACC1 video card V2.0	
Size: A0	Date: 2026-05-23
KiCad E.D.A. 10.0.0	Id: 1/1
	Rev: V2.0