


BOLT_SSAM

LED Clikier

Instruction Manual

Tools & Parts for Assembly

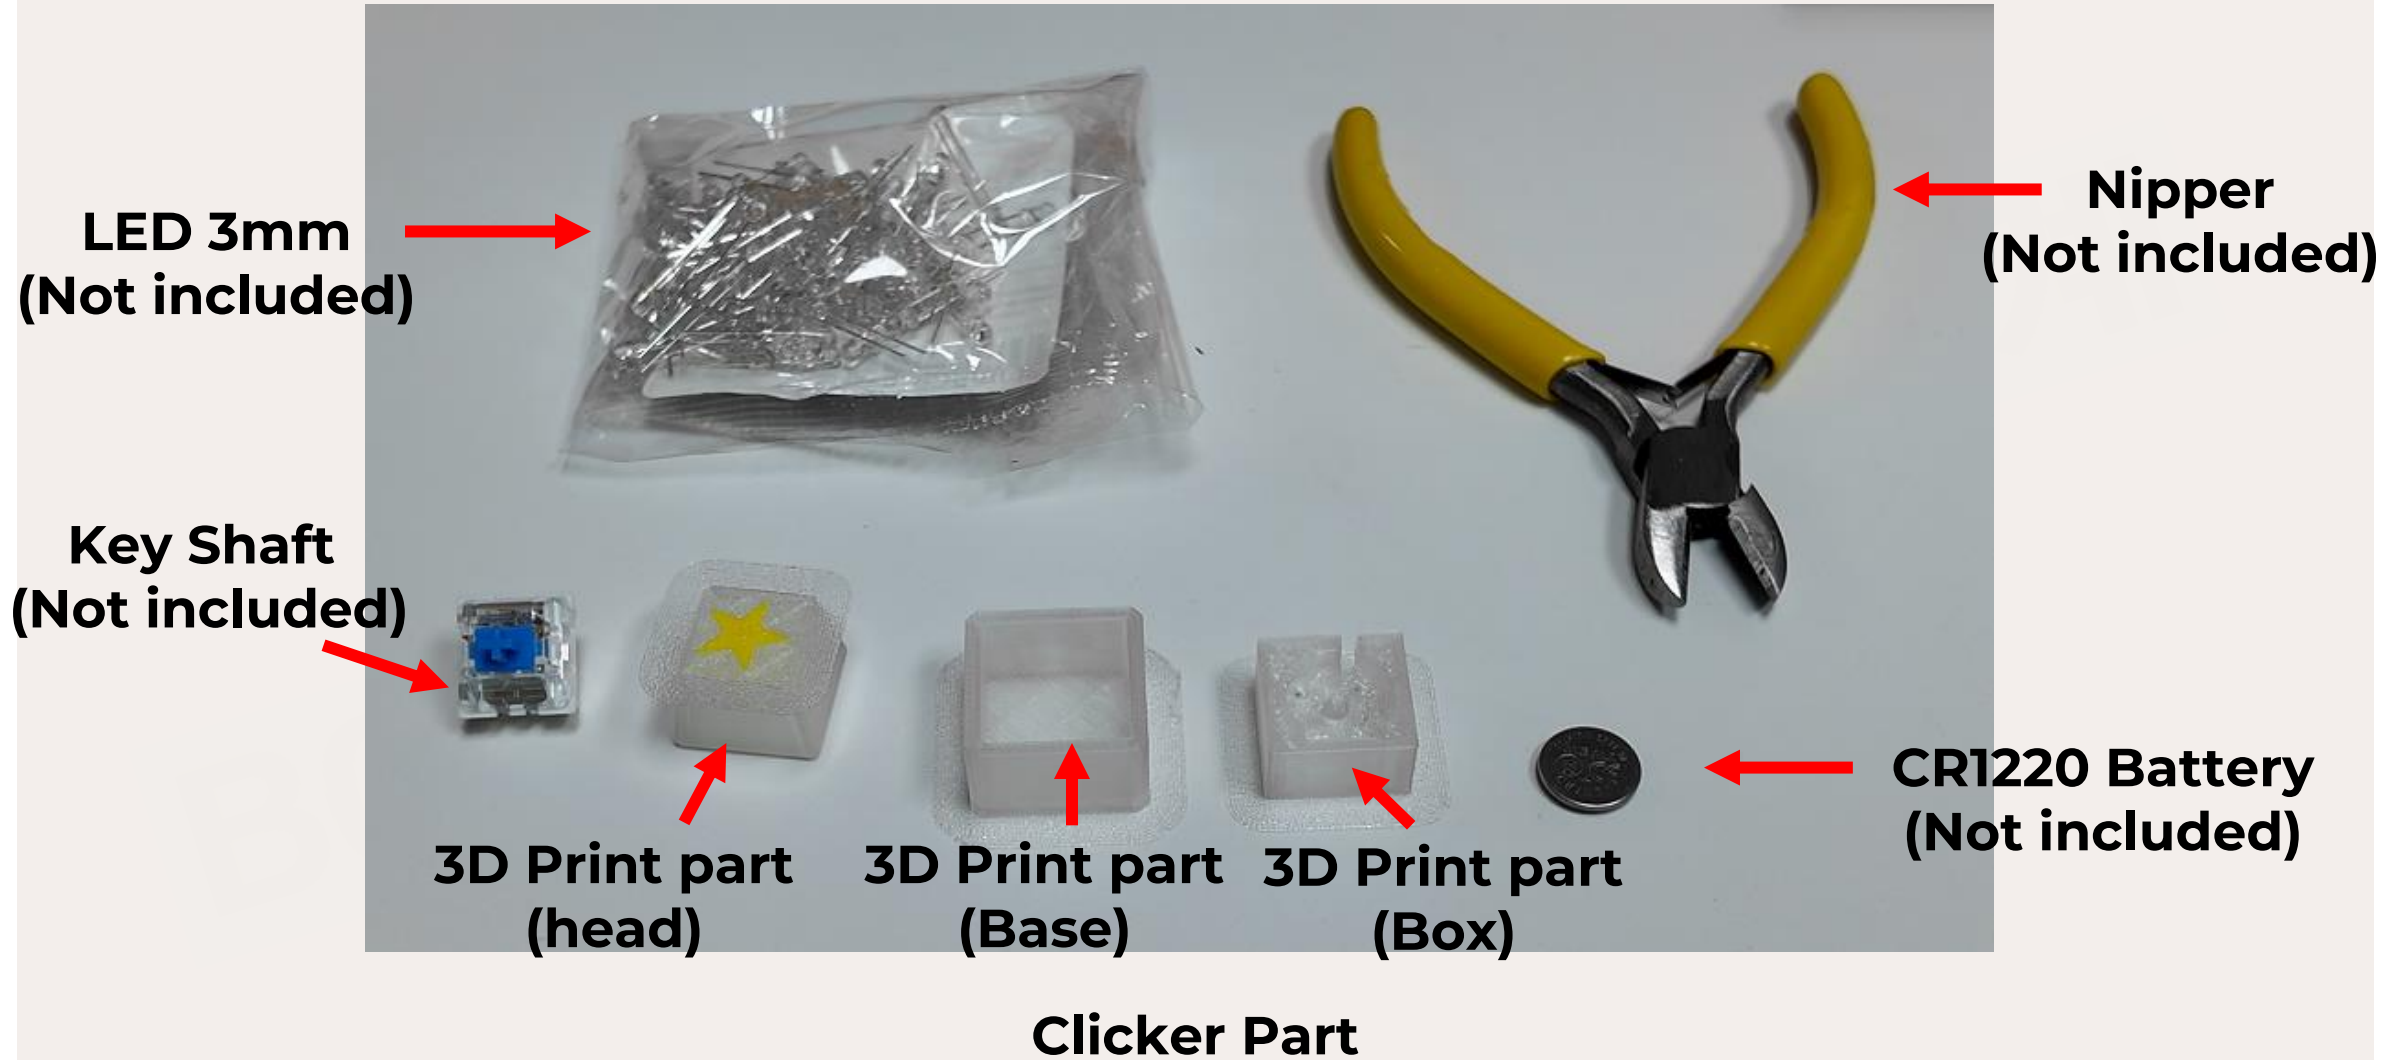

LED Clicker Assembly Instructions

Support



Support




① Remove Support

Please remove all parts that serve as supports during 3D printing operation.
(All branch-like structures are supports.)

② Finishing

Please smooth the surfaces where the supports have been removed using sandpaper or a utility knife.


How to assemble a clicker

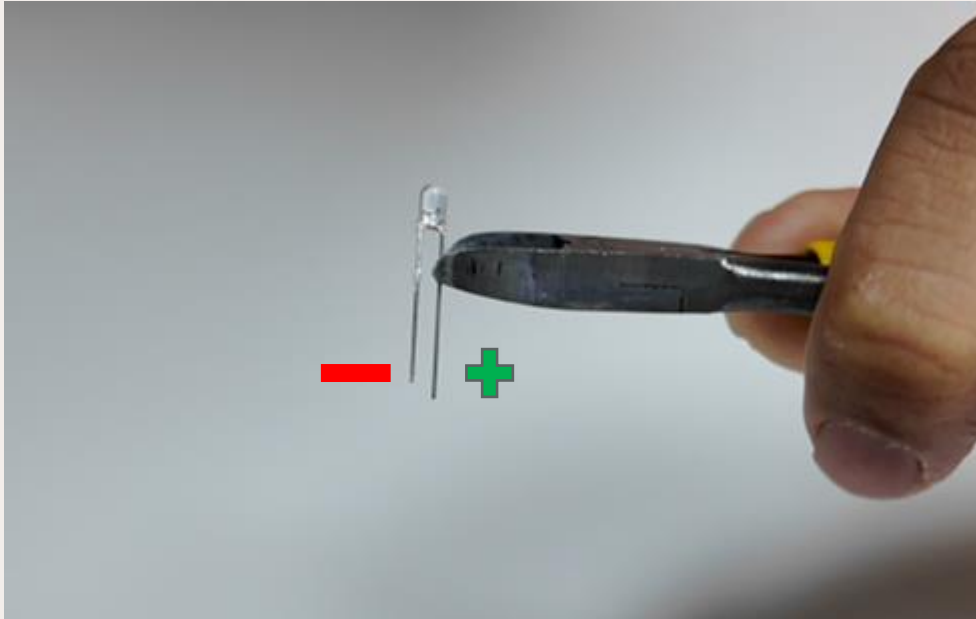

③ Checking Direction

Check the positive and negative terminals of the LED. The longer leg is the positive terminal.



How to assemble a clicker

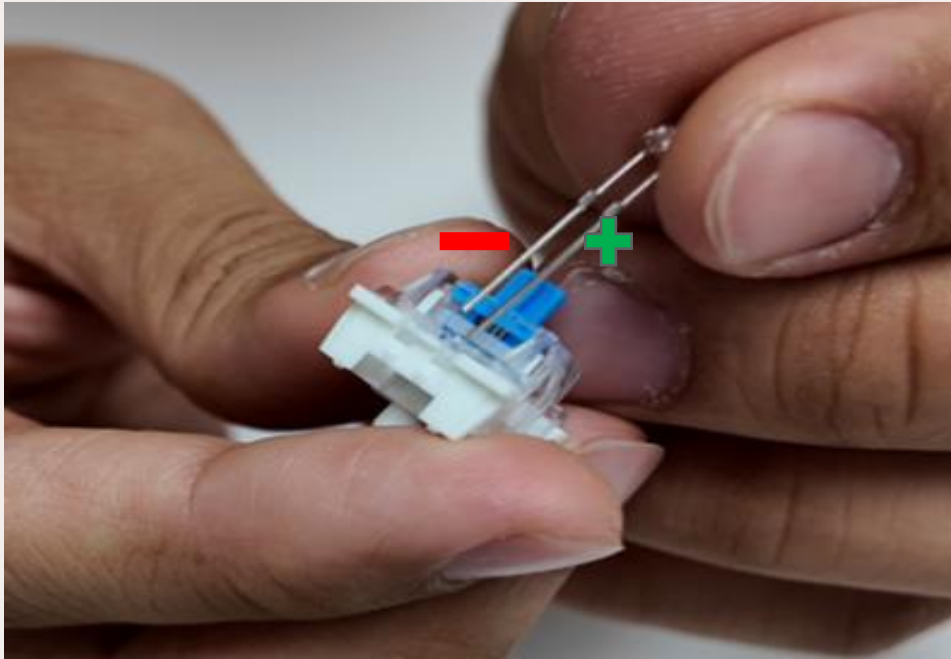

④ LED Assembly

Assemble the LED in the same direction as shown in the picture.


How to assemble a clicker

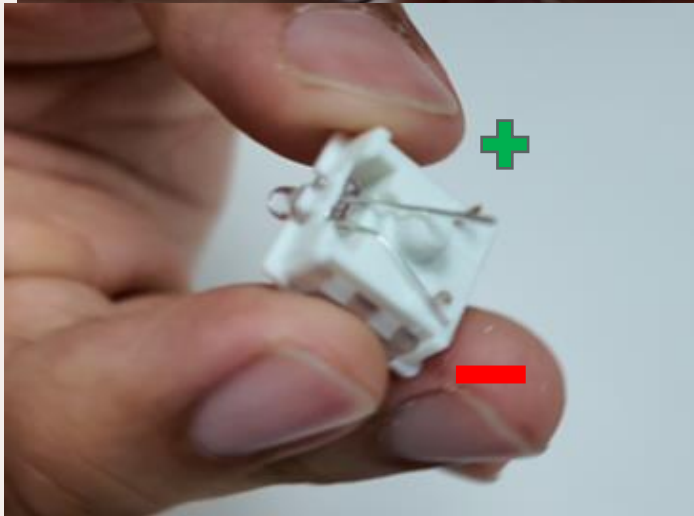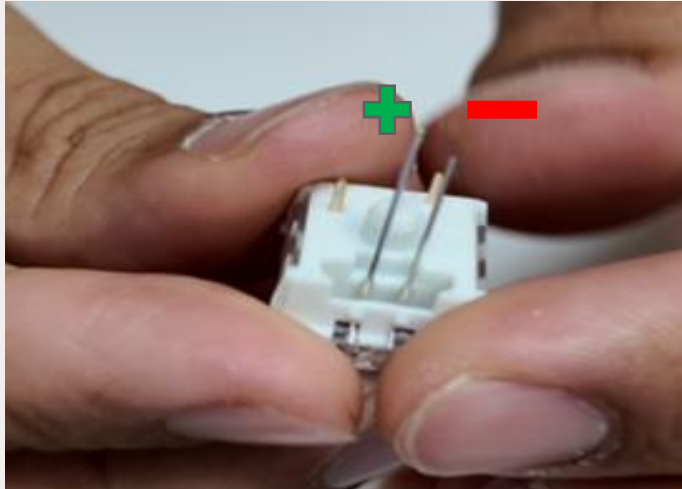

⑤ Connect the negative terminal to the pin.



Bend the negative leg of the LED so that it touches the pin during assembly.
Please do not bend the positive leg.

How to assemble a clicker

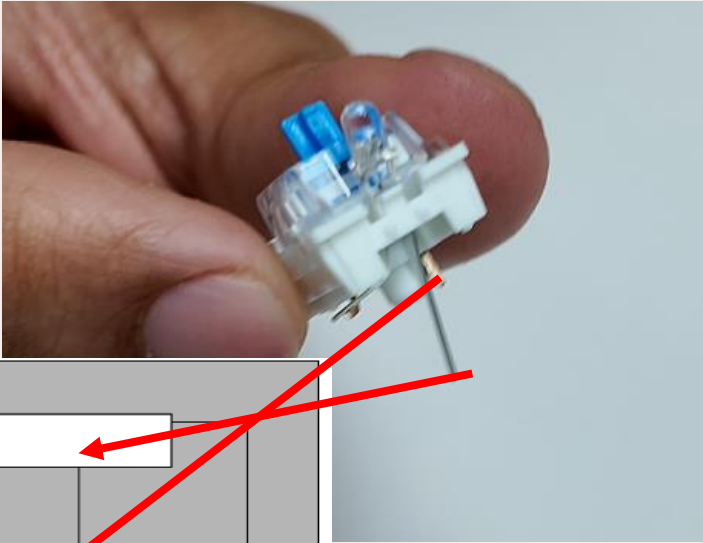


⑥ Assembly Box

Insert the positive terminal and the pin into the corresponding holes.

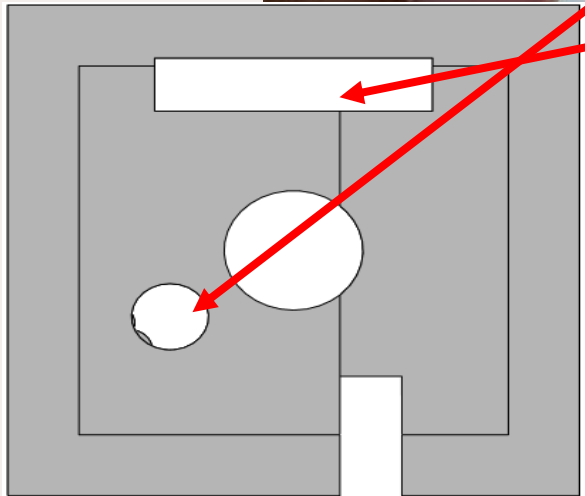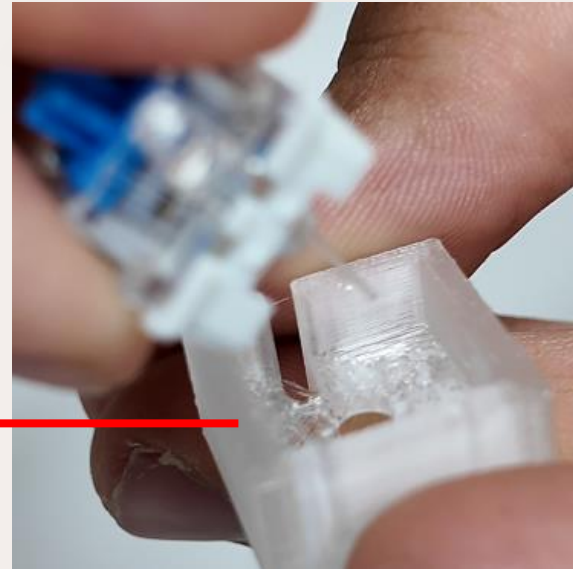

3D Print Part (BOX)

How to assemble a clicker

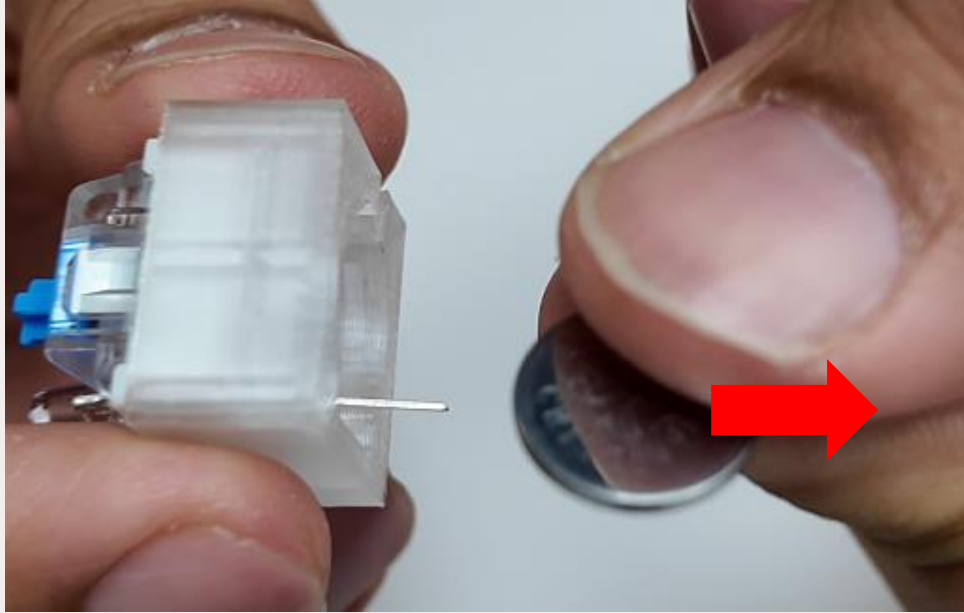


⑦ Assembly Battery

Insert the battery with the positive (+) side facing outward.

You can identify the polarity by checking the + and - markings on the battery.


How to assemble a clicker

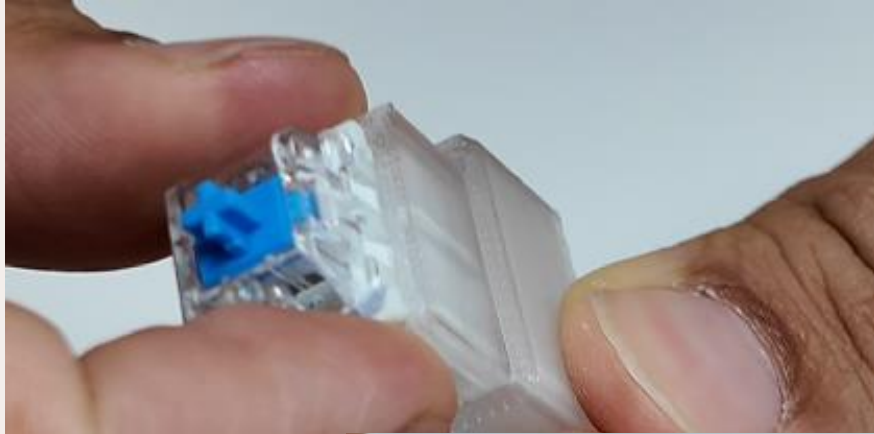

⑧ Assembly Base & Box


Insert the box assembled with the switch stem into the base.

The orientation does not matter much.

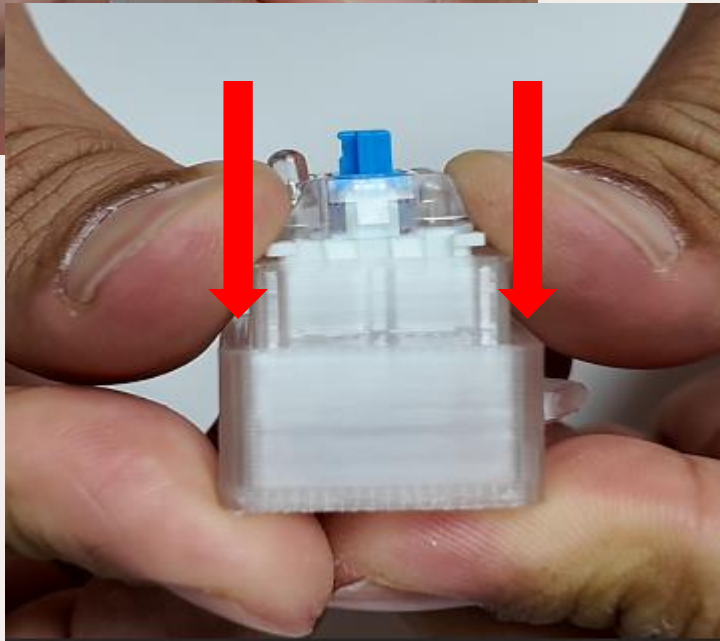

The tolerance is very tight.
If assembly is difficult, firmly press the surrounding area using nippers.

How to assemble a clicker

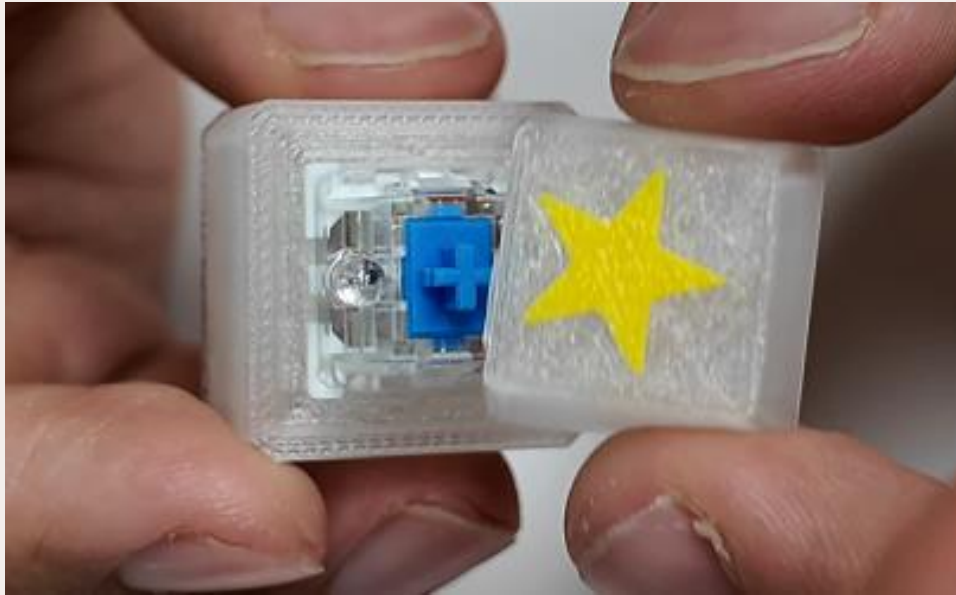

⑨ Assembly Head

Finally, assemble the head.

How to assemble a clicker



⑩ Click!

Click the clicker.

A beautiful light will turn on.

Try giving it as a gift to your friends, acquaintances, or coworkers.