


CONTAINMENT CAP (Piece 3/5) -- containment_cap() — top-down silhouette projection (projection(cut=false))

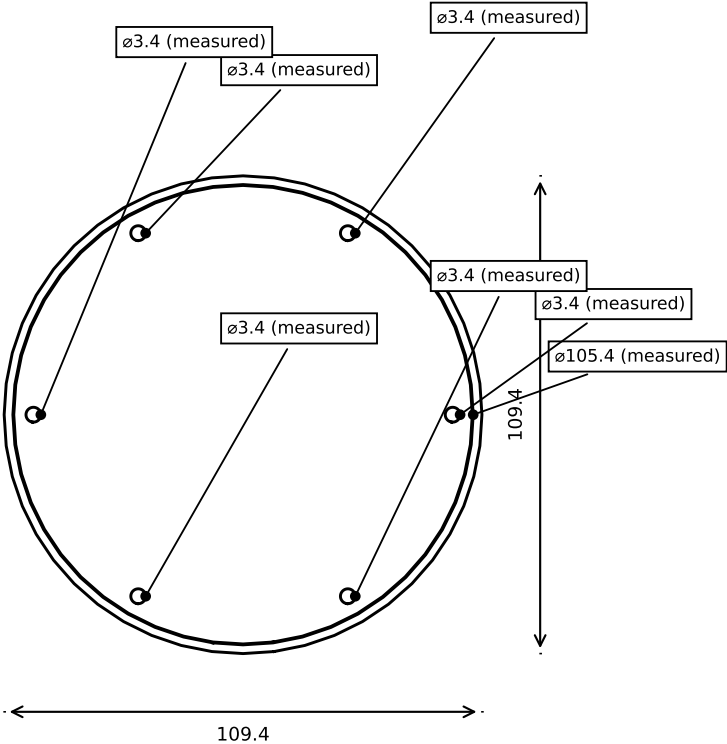

- 6x M3 -> Ruthex RX-M3x5.7 brass heat-set insert, bolt circle r=48.0mm. CONFIRMED (insert dimension match).
- Safety-relevant joint (REQ-403) -- ACCEPTED-RISK defense-in-depth containment, NOT proven-adequate (validation/open-issues.md MISS-016).
- Outer boundary measured as a circle, ø109.4 (auto-fit from parsed DXF vertices).

PART	CONTAINMENT CAP (Piece 3/5) -- containment_cap()
PROJECT	Bench-IMU-01 (ktanino10/ai-hardware-engineering-team)
SOURCE	bench-imu-01-enclosure.scad -> OpenSCAD projection(cut=false) -> DXF
NOTE	OpenSCAD-source-driven drafting sheet. NOT a Fusion 360 drawing.
SCALE	0.75 : 1 (as printed on this sheet at 25.4px/mm; verify printer scaling before treating as physically 1:1)
UNITS	mm
REV / ECO	Rev 3 -- Design Complete GRANTED; REQ-403 safety part
DATE	2026-09-03