


A / MINI RELIEF

Actual FreeCAD TechDraw projections; drawing dimensions, not a fit certification.

FRONT / face towards -Y

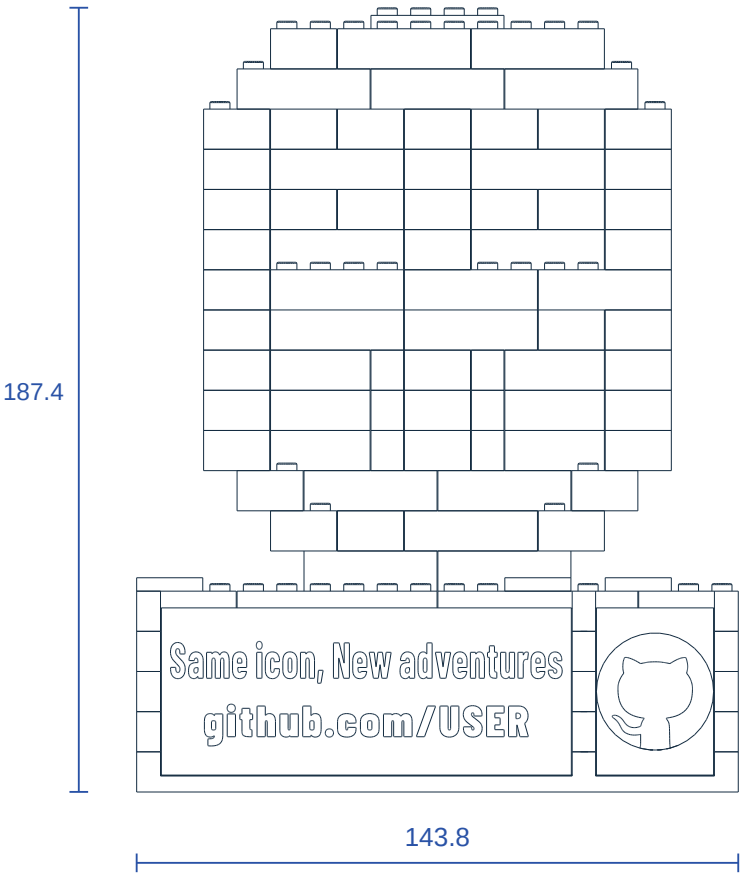


91 assembled parts / 23 numbered stages


Target: 144 x 64 x 188.4 (approx. height)

Measured CAD envelope: 143.8 x 64.2 x 187.4 incl. top studs

RIGHT SIDE

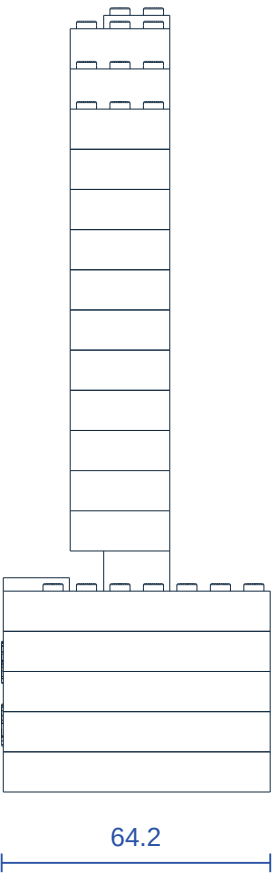


TOP / front at bottom

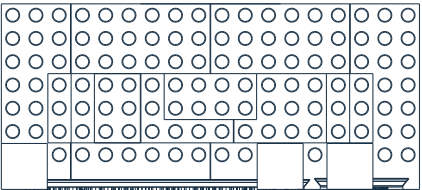

A / EXPLODED ASSEMBLY

CAD-derived exploded view; displacement is illustrative, dimensions are not changed.

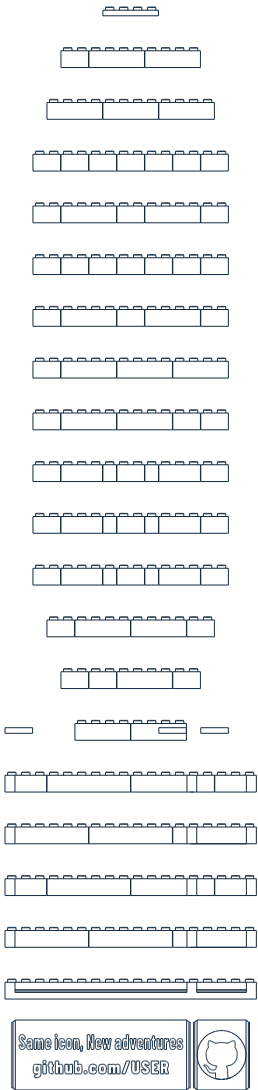


EXPLODED FRONT

- Actual solids, displaced only for this view.
- Exact WebGL 100% offsets, centered up/down.
- Do not measure assembly height here.
- Use overview for final outside dimensions.
- Insert parts downward in numbered order.
- Front modules release before spreading.
- Stud engagement != verified physical clutch.

TEXT / flat printing view




RIGHT LOGO / supported relief



INTERFACE / SECTION & CLEARANCE


Project design candidates, NOT a proprietary tolerance standard. Geometry from FreeCAD planar sections.

SECTION: Y = 4.00 / TWO 2x2 BRICKS

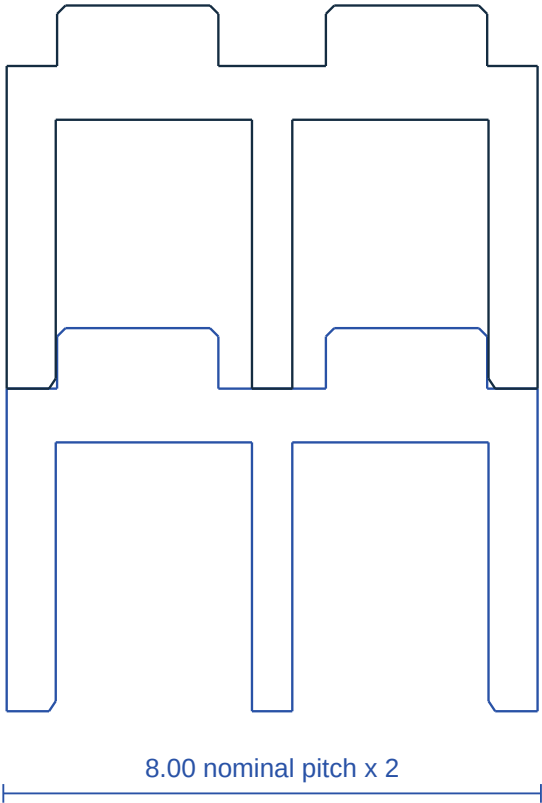

JOINT SECTION: Z = 10.50

Actual wall, tube, rib + mating stud outlines

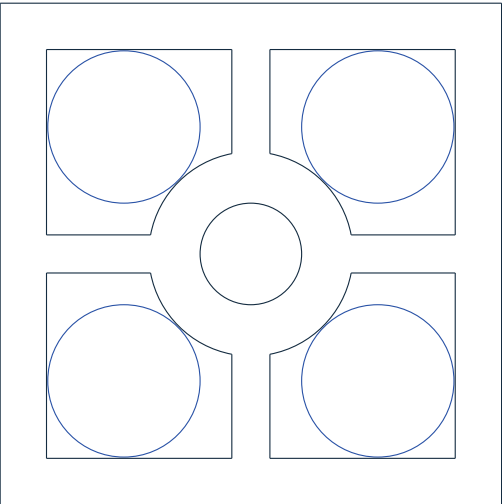

Blue: lower brick / black: upper socket

Reference stud dia 4.80; candidate height 1.80

Radial clearance $c=+0.04$ (default; untested)

Inside wall offset 1.56 / wall thickness 1.46

Tube OD 6.433708 / ID 3.20; grid rib 1.20

Tip lead-in 0.25 / female lead-in 0.20 x 0.30

Roof 1.60; thin plate roof 1.00


Thin plate / keeper: nominal headroom 0.40

No forced fit. Tune male and female separately.


NP3 / BASE-FRONT CAPTURE & REMOVAL

Actual BREP sections; precise dimensions apply to the nominal model, not guaranteed printed fit.

B / HORIZONTAL SECTION Z=24 / FRONT 8mm BAND

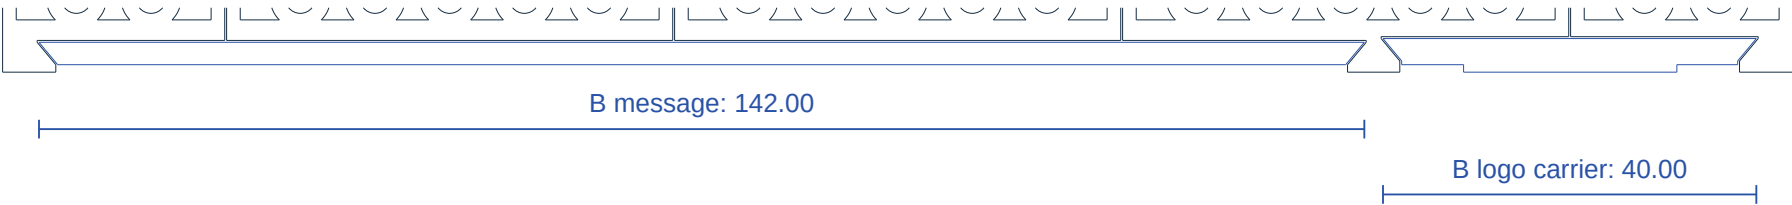

VERTICAL SECTION X=40

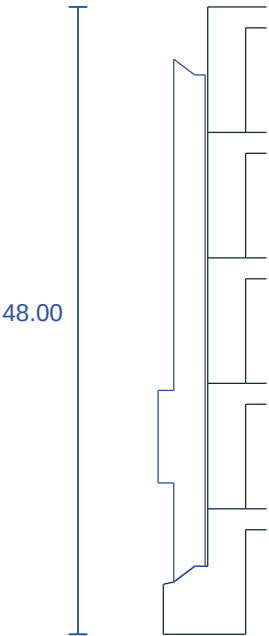

- Blue: installed modules; black: actual receiver / keepers
- Carrier thickness2.40 / rear flat0.80 / edge relief1.20
- Rear width -> front width: 2.00 inset on each X side
- Default side clearance0.20; coupon candidates0.15/0.20/0.25
- Text frontY=-0.30 / logo frontY=0.10; +0.40mm depth
- Both front modules fit in Z=4.00..44.00, inside48mm base
- 3 separate up-stops: text2 / logo1; stud-grid mounting
- Remove: up-stops up6, forward>=32; module up45
- Thread / glue / magnet / purchased fastener not required
- Physical clutch, retention, flatness and stability NOT tested

A / COLOR BOM / 1

One STL geometry may be printed in several colors. Use the quantities for this model only.

PART ID	COLOR	QTY	PRINT FILE
BASE3-03x08-T-48de52	black	2	parts/BASE3-03x08-T-48de52.stl
BASE3-03x08-T-80e081	black	2	parts/BASE3-03x08-T-80e081.stl
BASE3-06x08-T-7532db	black	2	parts/BASE3-06x08-T-7532db.stl
BASE3-06x08-T-7f51dc	black	2	parts/BASE3-06x08-T-7f51dc.stl
BASE3-06x08-T-9cb610	black	4	parts/BASE3-06x08-T-9cb610.stl
BASE3-06x08-T-b8aa05	black	2	parts/BASE3-06x08-T-b8aa05.stl
BASE3-18x08-B-a4853c	black	1	parts/BASE3-18x08-B-a4853c.stl
BR-01x02-H096	green	6	parts/BR-01x02-H096.stl
BR-02x02-H096	black	13	parts/BR-02x02-H096.stl
BR-02x03-H096	cyan	14	parts/BR-02x03-H096.stl
BR-02x03-H096	magenta	12	parts/BR-02x03-H096.stl
BR-03x02-H096	black	6	parts/BR-03x02-H096.stl
BR-04x02-H032	magenta	1	parts/BR-04x02-H032.stl
BR-04x02-H096	black	9	parts/BR-04x02-H096.stl
BR-04x02-H096	magenta	2	parts/BR-04x02-H096.stl
BR-04x03-H096	cyan	8	parts/BR-04x03-H096.stl
NP3-KEEPER	black	3	parts/NP3-KEEPER.stl
NP3-LOGO-A	black	1	parts/NP3-LOGO-A.stl
NP3-TEXT-A	black	1	parts/NP3-TEXT-A.stl

TEXT: black -> white at 2.4mm; LOGO: black -> white at 2.8mm. Separate plates.

Assembly: 91 pieces, including 2 front modules + 3 keepers. Coupons separate.

A / STEP 01 OF 23

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

ADD 1 PART(S)

A-001 BLACK

BASE3-18x08-B-a4853c @ 0,0,0



nominal 144 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

A / STEP 02 OF 23

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

ADD 3 PART(S)

A-002 BLACK

BASE3-06x08-T-b8aa05 @ 0,0,9.6

A-003 BLACK

BASE3-06x08-T-9cb610 @ 48,0,9.6

A-004 BLACK

BASE3-06x08-T-7f51dc @ 96,0,9.6




nominal 144 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

A / STEP 03 OF 23

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

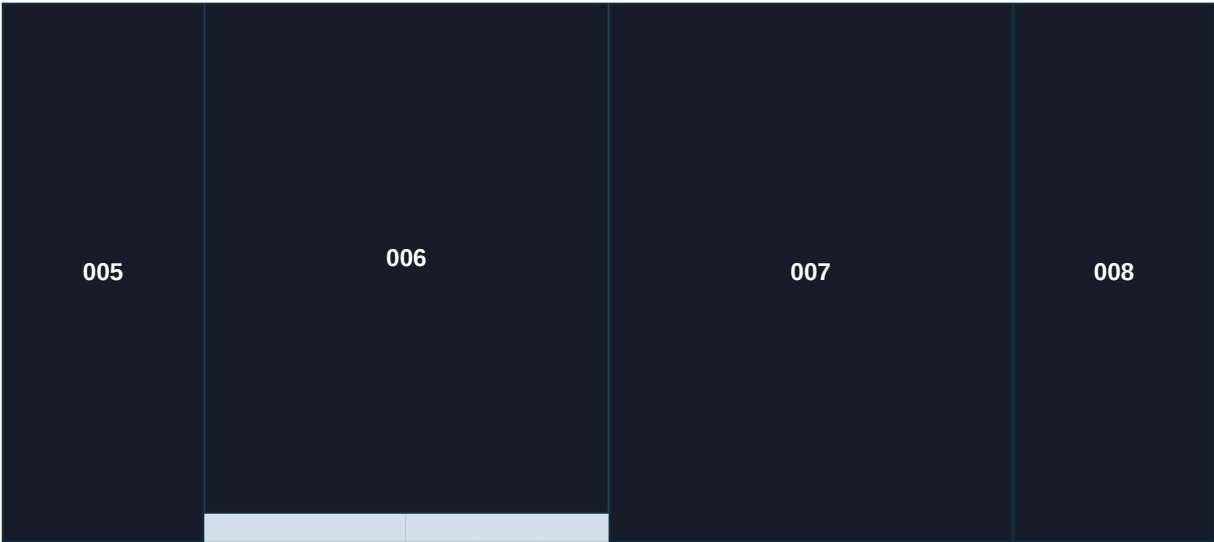

nominal 144 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 4 PART(S)

- A-005 BLACK**
BASE3-03x08-T-48de52 @ 0,0,19.2
- A-006 BLACK**
BASE3-06x08-T-9cb610 @ 24,0,19.2
- A-007 BLACK**
BASE3-06x08-T-7532db @ 72,0,19.2
- A-008 BLACK**
BASE3-03x08-T-80e081 @ 120,0,19.2

A / STEP 04 OF 23

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

ADD 3 PART(S)

A-009 BLACK

BASE3-06x08-T-b8aa05 @ 0,0,28.8

A-010 BLACK

BASE3-06x08-T-9cb610 @ 48,0,28.8

A-011 BLACK

BASE3-06x08-T-7f51dc @ 96,0,28.8




nominal 144 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

A / STEP 05 OF 23

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

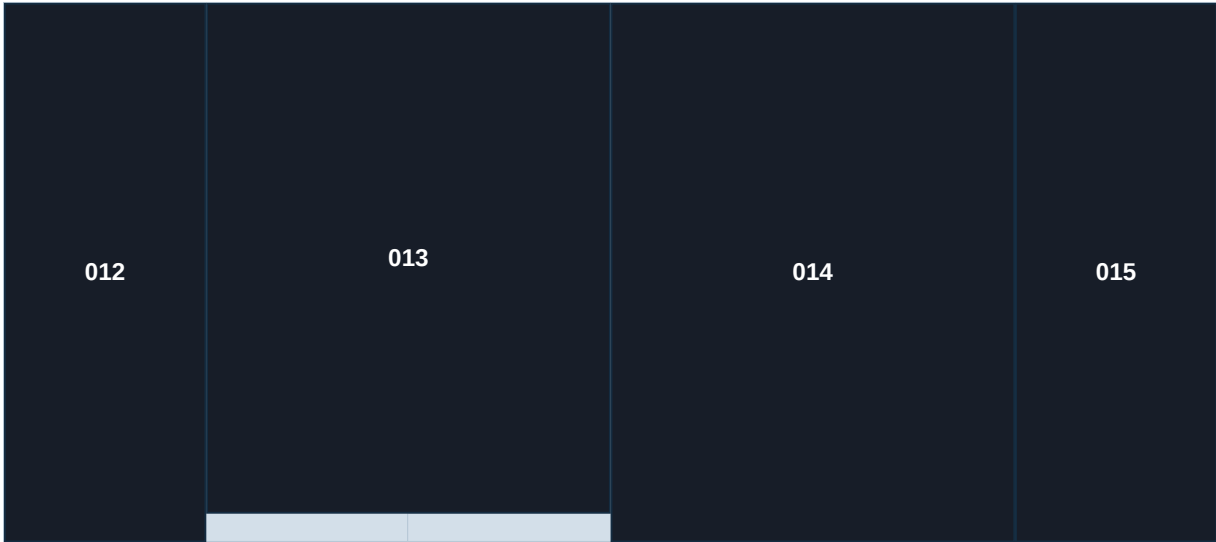

nominal 144 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 4 PART(S)

A-012 BLACK

BASE3-03x08-T-48de52 @ 0,0,38.4

A-013 BLACK

BASE3-06x08-T-9cb610 @ 24,0,38.4

A-014 BLACK

BASE3-06x08-T-7532db @ 72,0,38.4

A-015 BLACK

BASE3-03x08-T-80e081 @ 120,0,38.4

A / STEP 06 OF 23

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color


ADD 2 PART(S)

A-016 BLACK

NP3-TEXT-A @ 4,3,3,4

A-017 BLACK

NP3-LOGO-A @ 108,3,7,4

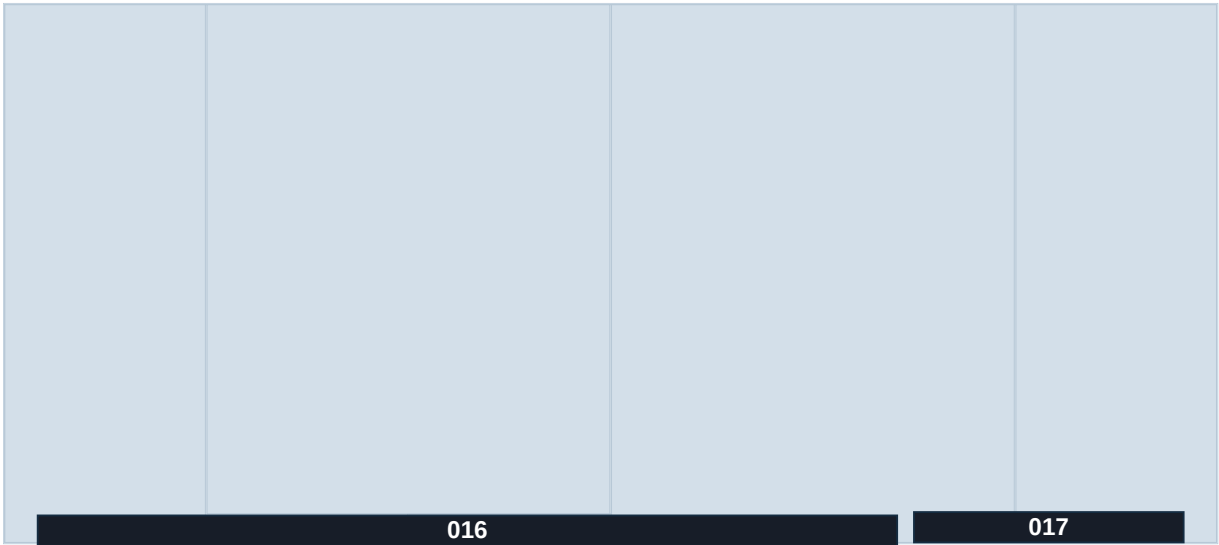

FRONT (-Y) / new parts enter from above (+Z)

A / STEP 07 OF 23

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

ADD 3 PART(S)

A-018 BLACK


NP3-KEEPER @ 0,0,48

A-019 BLACK

NP3-KEEPER @ 88,0,48

A-020 BLACK

NP3-KEEPER @ 112,0,48

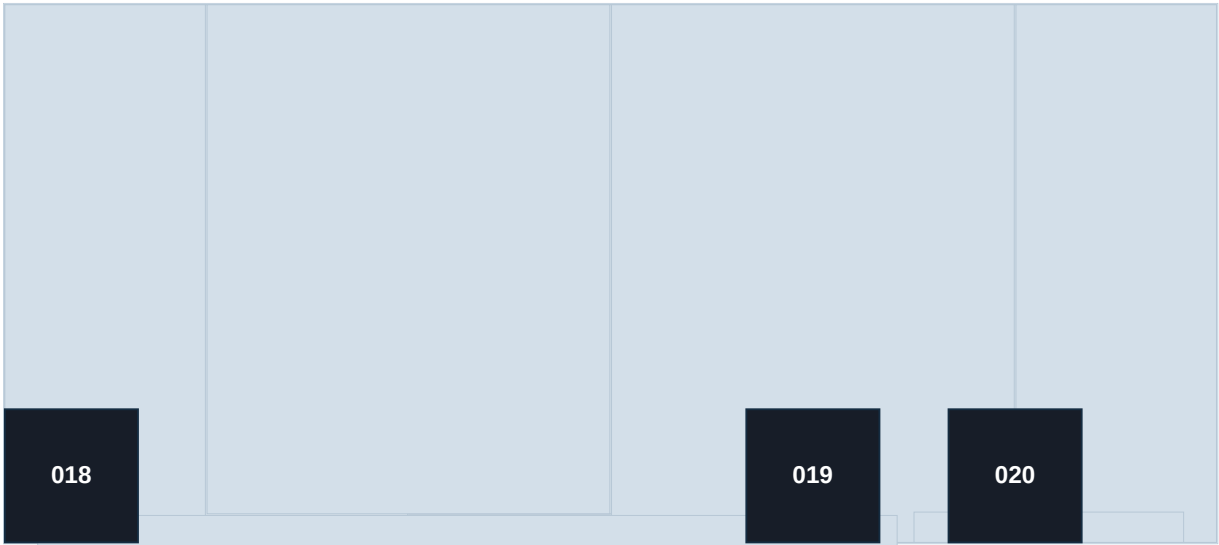

nominal 144 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

A / STEP 08 OF 23

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color


ADD 2 PART(S)

A-021 MAGENTA

BR-04x02-H096 @ 40,24,48

A-022 MAGENTA

BR-04x02-H096 @ 72,24,48

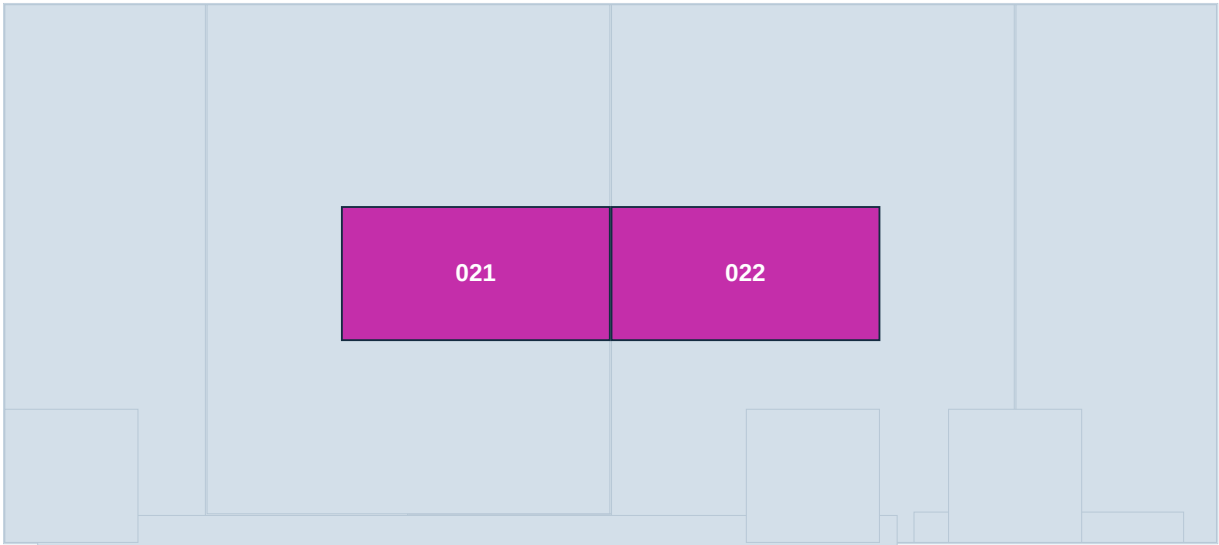


nominal 144 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

A / STEP 09 OF 23

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

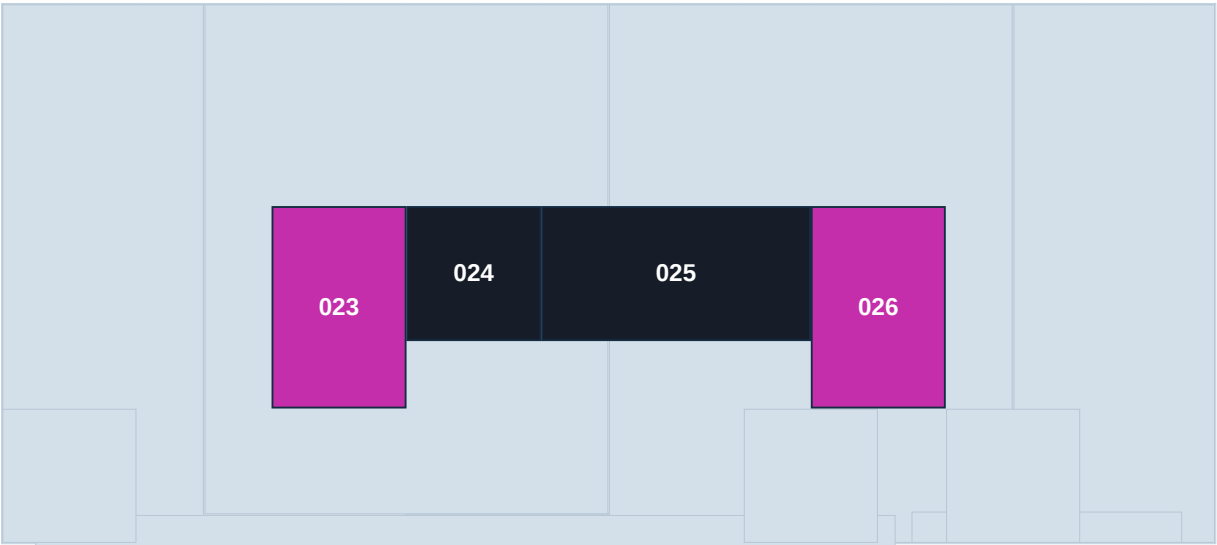

FRONT (-Y) / new parts enter from above (+Z)

ADD 4 PART(S)

A-023 MAGENTA

BR-02x03-H096 @ 32,16,57.6

A-024 BLACK

BR-02x02-H096 @ 48,24,57.6

A-025 BLACK

BR-04x02-H096 @ 64,24,57.6


A-026 MAGENTA

BR-02x03-H096 @ 96,16,57.6

A / STEP 10 OF 23

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

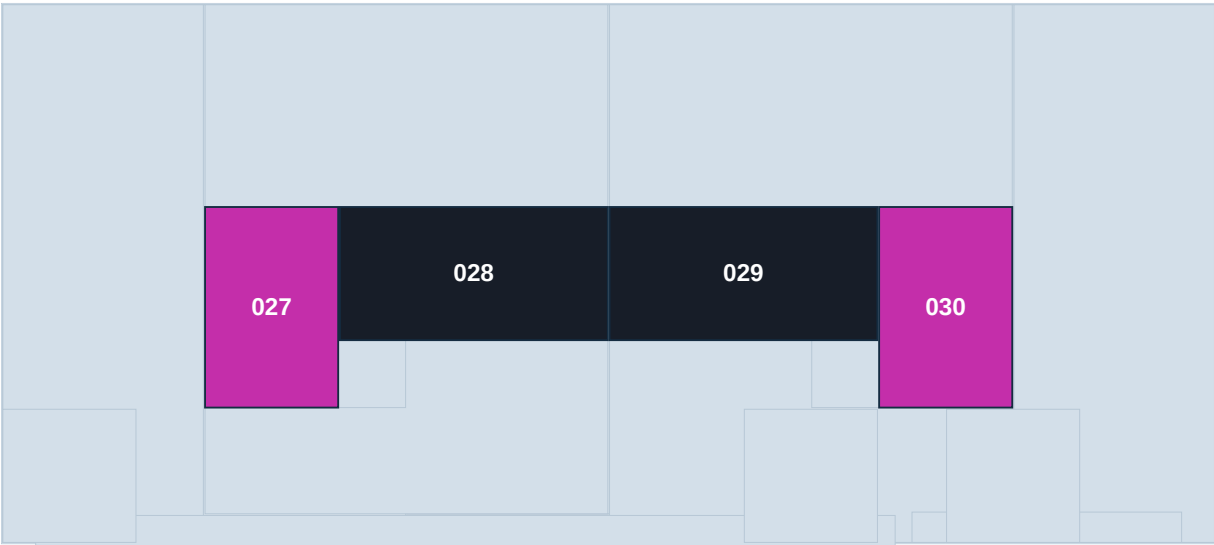

FRONT (-Y) / new parts enter from above (+Z)

ADD 4 PART(S)

A-027 MAGENTA

BR-02x03-H096 @ 24,16,67.2

A-028 BLACK

BR-04x02-H096 @ 40,24,67.2

A-029 BLACK

BR-04x02-H096 @ 72,24,67.2


A-030 MAGENTA

BR-02x03-H096 @ 104,16,67.2

A / STEP 11 OF 23

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

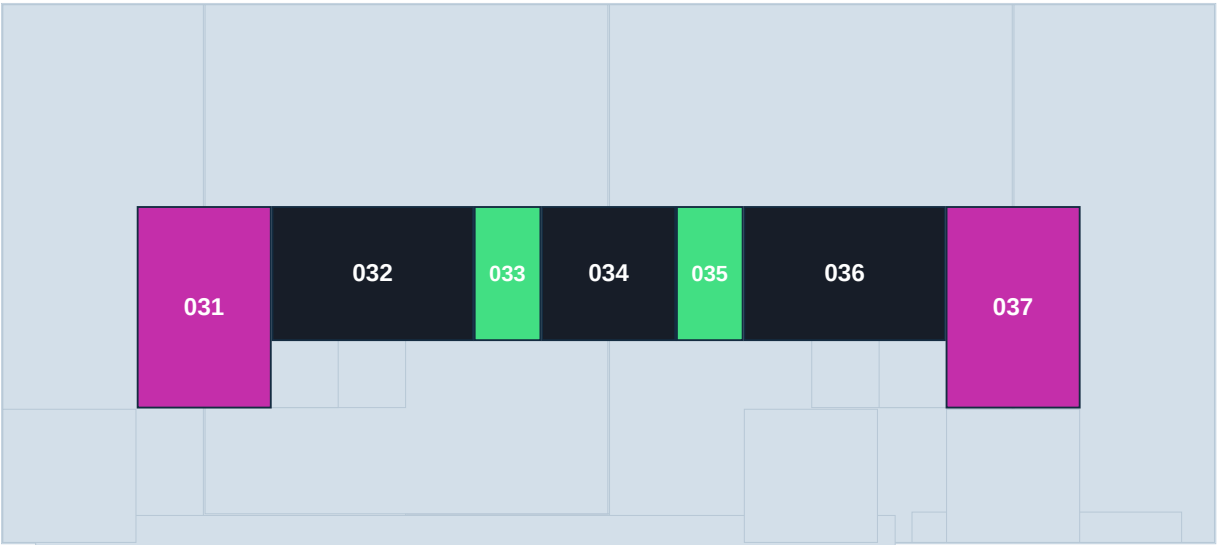

nominal 144 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 7 PART(S)

A-031 MAGENTA

BR-02x03-H096 @ 16,16,76.8

A-032 BLACK

BR-03x02-H096 @ 32,24,76.8

A-033 GREEN

BR-01x02-H096 @ 56,24,76.8

A-034 BLACK

BR-02x02-H096 @ 64,24,76.8

A-035 GREEN

BR-01x02-H096 @ 80,24,76.8

A-036 BLACK

BR-03x02-H096 @ 88,24,76.8


A-037 MAGENTA

BR-02x03-H096 @ 112,16,76.8

A / STEP 12 OF 23

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

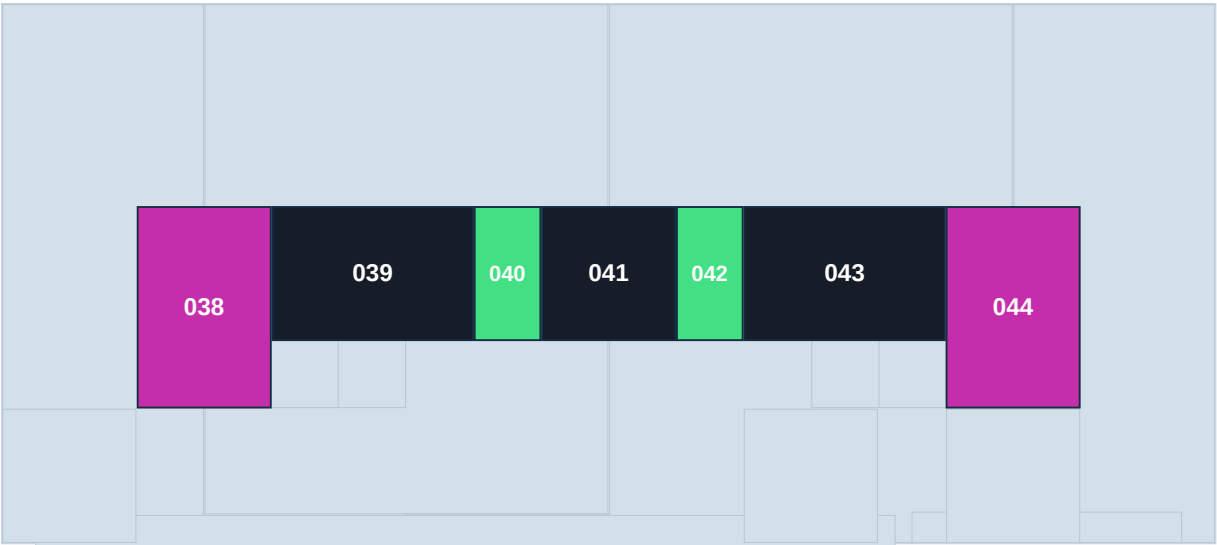

nominal 144 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 7 PART(S)

A-038 MAGENTA

BR-02x03-H096 @ 16,16,86.4

A-039 BLACK

BR-03x02-H096 @ 32,24,86.4

A-040 GREEN

BR-01x02-H096 @ 56,24,86.4

A-041 BLACK

BR-02x02-H096 @ 64,24,86.4

A-042 GREEN

BR-01x02-H096 @ 80,24,86.4

A-043 BLACK

BR-03x02-H096 @ 88,24,86.4


A-044 MAGENTA

BR-02x03-H096 @ 112,16,86.4

A / STEP 13 OF 23

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

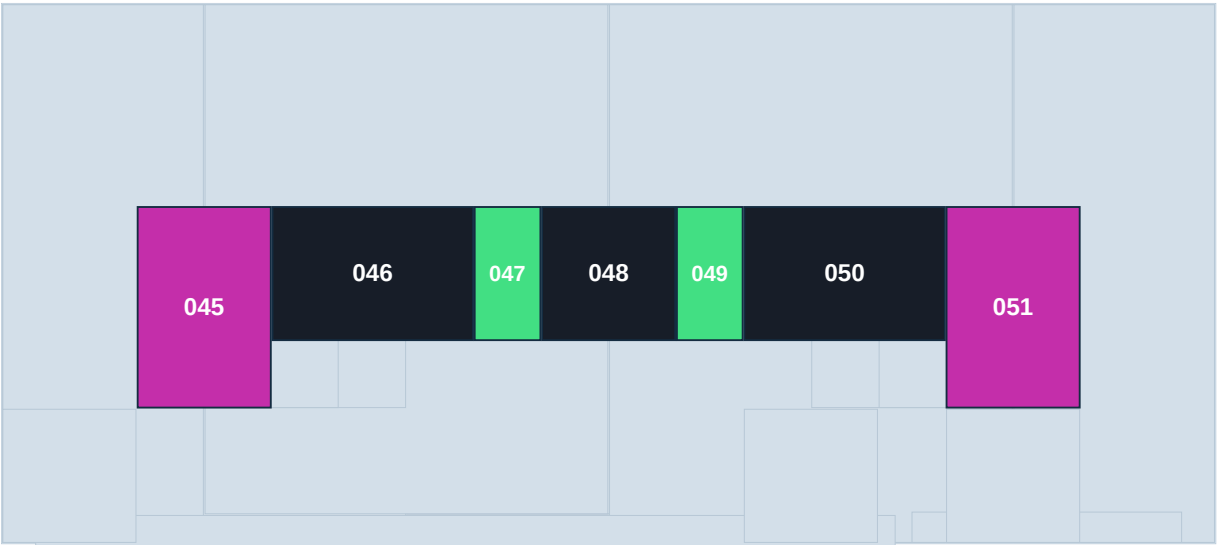

nominal 144 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 7 PART(S)

A-045 MAGENTA

BR-02x03-H096 @ 16,16,96

A-046 BLACK

BR-03x02-H096 @ 32,24,96

A-047 GREEN

BR-01x02-H096 @ 56,24,96

A-048 BLACK

BR-02x02-H096 @ 64,24,96

A-049 GREEN

BR-01x02-H096 @ 80,24,96

A-050 BLACK

BR-03x02-H096 @ 88,24,96


A-051 MAGENTA

BR-02x03-H096 @ 112,16,96

A / STEP 14 OF 23

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

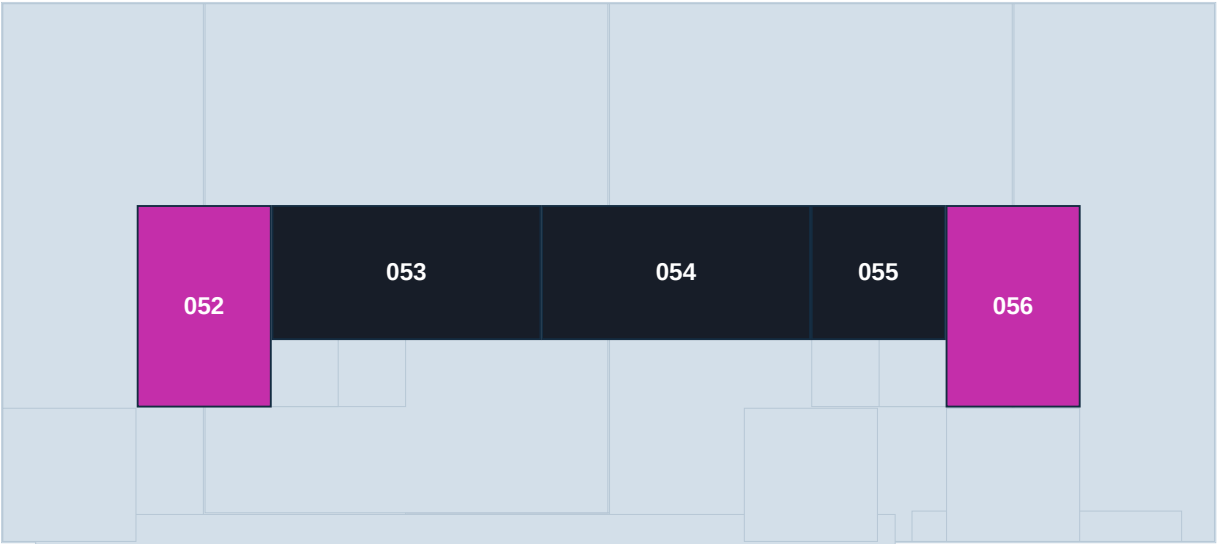

nominal 144 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 5 PART(S)

A-052 MAGENTA

BR-02x03-H096 @ 16,16,105.6

A-053 BLACK

BR-04x02-H096 @ 32,24,105.6

A-054 BLACK

BR-04x02-H096 @ 64,24,105.6

A-055 BLACK

BR-02x02-H096 @ 96,24,105.6

A-056 MAGENTA

BR-02x03-H096 @ 112,16,105.6

A / STEP 15 OF 23

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

ADD 4 PART(S)

A-057 CYAN

BR-02x03-H096 @ 16,16,115.2

A-058 CYAN


BR-04x03-H096 @ 32,16,115.2

A-059 CYAN

BR-04x03-H096 @ 64,16,115.2

A-060 CYAN

BR-04x03-H096 @ 96,16,115.2

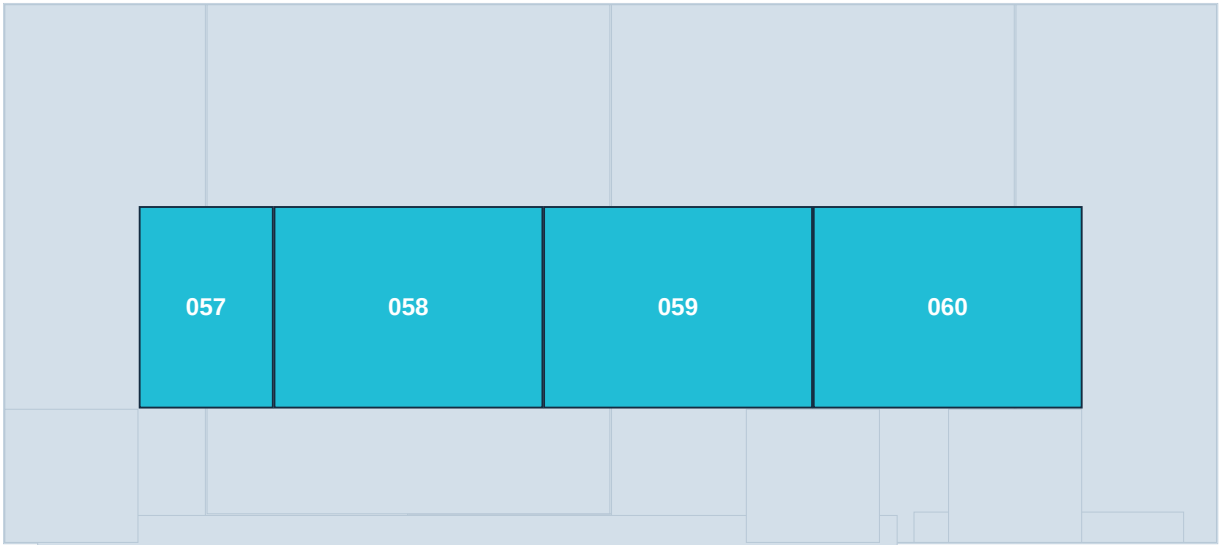


nominal 144 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

A / STEP 16 OF 23

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

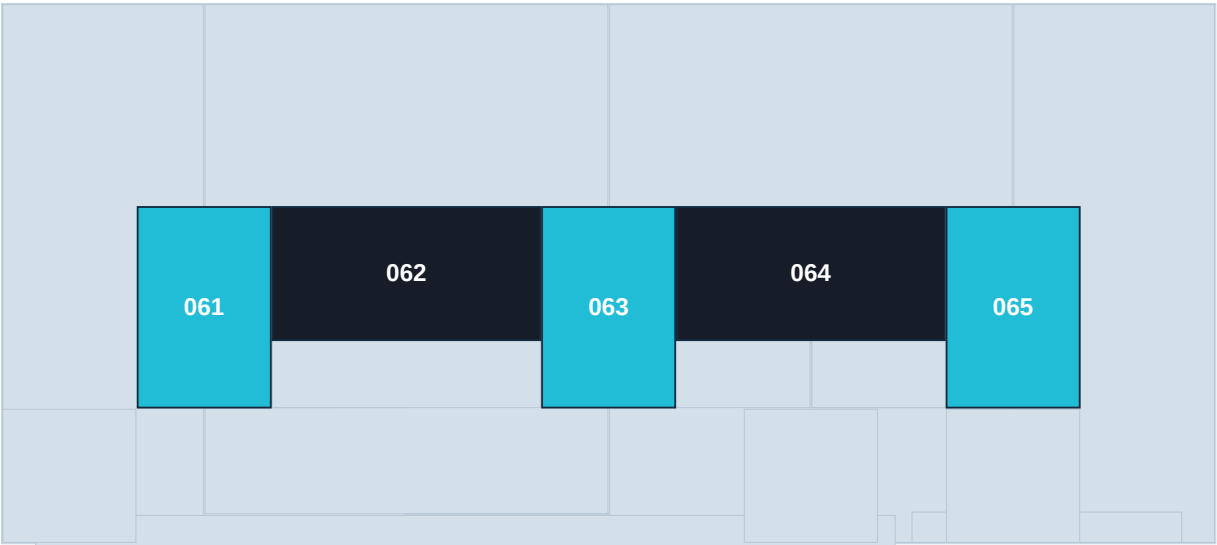

nominal 144 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 5 PART(S)

A-061 CYAN

BR-02x03-H096 @ 16,16,124.8

A-062 BLACK

BR-04x02-H096 @ 32,24,124.8

A-063 CYAN

BR-02x03-H096 @ 64,16,124.8

A-064 BLACK

BR-04x02-H096 @ 80,24,124.8


A-065 CYAN

BR-02x03-H096 @ 112,16,124.8

A / STEP 17 OF 23

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

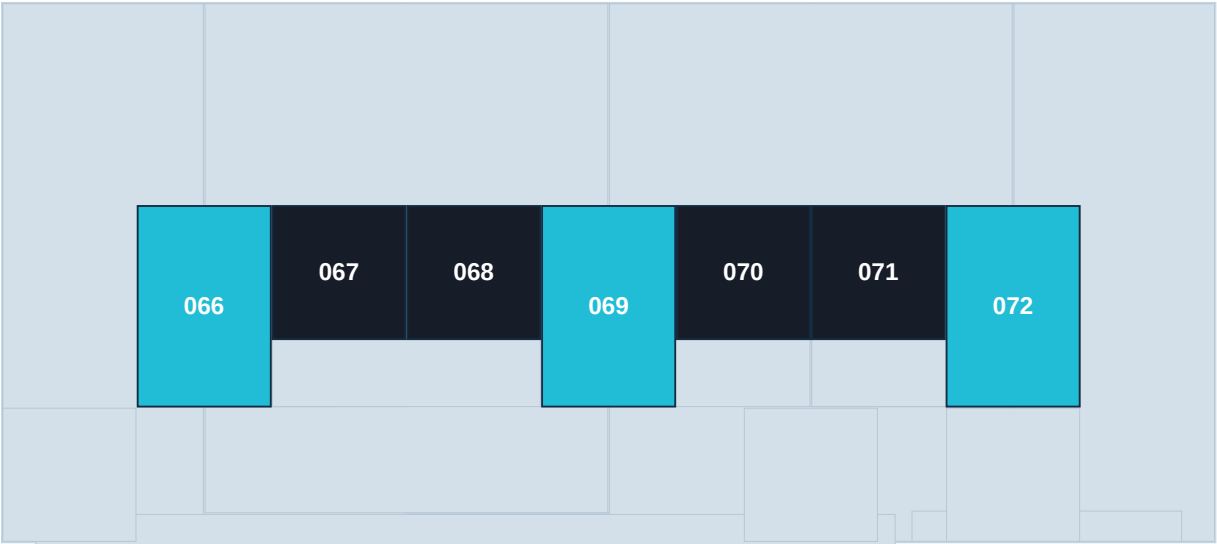

nominal 144 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 7 PART(S)

A-066 CYAN

BR-02x03-H096 @ 16,16,134.4

A-067 BLACK

BR-02x02-H096 @ 32,24,134.4

A-068 BLACK

BR-02x02-H096 @ 48,24,134.4

A-069 CYAN

BR-02x03-H096 @ 64,16,134.4

A-070 BLACK

BR-02x02-H096 @ 80,24,134.4

A-071 BLACK

BR-02x02-H096 @ 96,24,134.4


A-072 CYAN

BR-02x03-H096 @ 112,16,134.4

A / STEP 18 OF 23

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

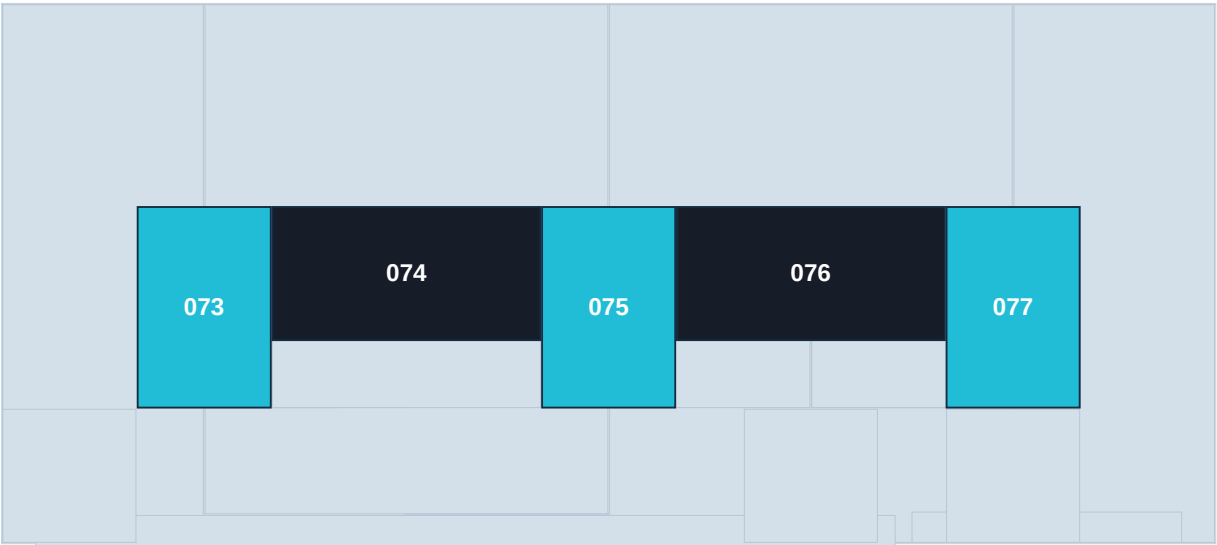

nominal 144 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 5 PART(S)

A-073 CYAN

BR-02x03-H096 @ 16,16,144

A-074 BLACK

BR-04x02-H096 @ 32,24,144

A-075 CYAN

BR-02x03-H096 @ 64,16,144

A-076 BLACK

BR-04x02-H096 @ 80,24,144


A-077 CYAN

BR-02x03-H096 @ 112,16,144

A / STEP 19 OF 23

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

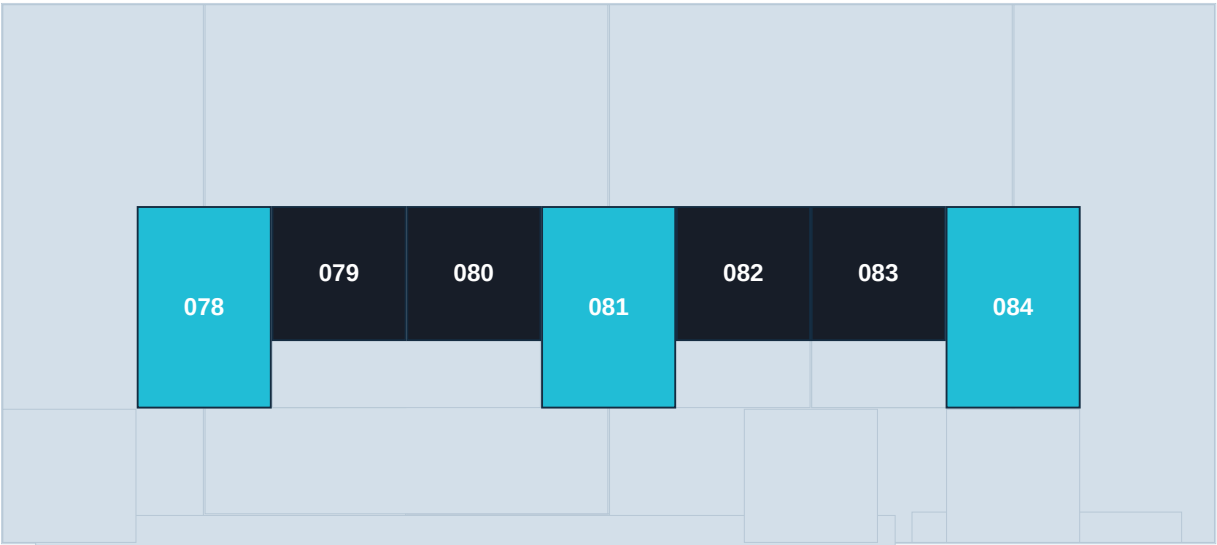

nominal 144 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 7 PART(S)

A-078 CYAN

BR-02x03-H096 @ 16,16,153.6

A-079 BLACK

BR-02x02-H096 @ 32,24,153.6

A-080 BLACK

BR-02x02-H096 @ 48,24,153.6

A-081 CYAN

BR-02x03-H096 @ 64,16,153.6

A-082 BLACK

BR-02x02-H096 @ 80,24,153.6

A-083 BLACK

BR-02x02-H096 @ 96,24,153.6

A-084 CYAN

BR-02x03-H096 @ 112,16,153.6

A / STEP 20 OF 23

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

ADD 3 PART(S)

A-085 CYAN

BR-04x03-H096 @ 24,16,163.2

A-086 CYAN

BR-04x03-H096 @ 56,16,163.2

A-087 CYAN

BR-04x03-H096 @ 88,16,163.2



nominal 144 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

A / STEP 21 OF 23

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

ADD 3 PART(S)

A-088 CYAN


BR-02x03-H096 @ 32,16,172.8

A-089 CYAN

BR-04x03-H096 @ 48,16,172.8

A-090 CYAN

BR-04x03-H096 @ 80,16,172.8

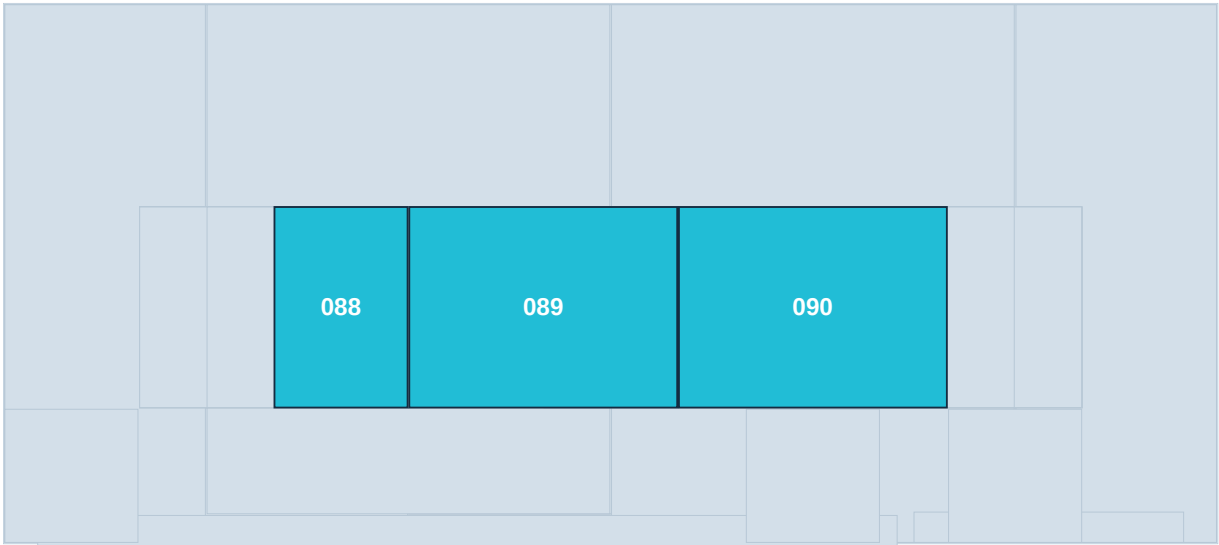

nominal 144 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

A / STEP 22 OF 23


Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

ADD 1 PART(S)

A-091 MAGENTA

BR-04x02-H032 @ 56,24,182.4

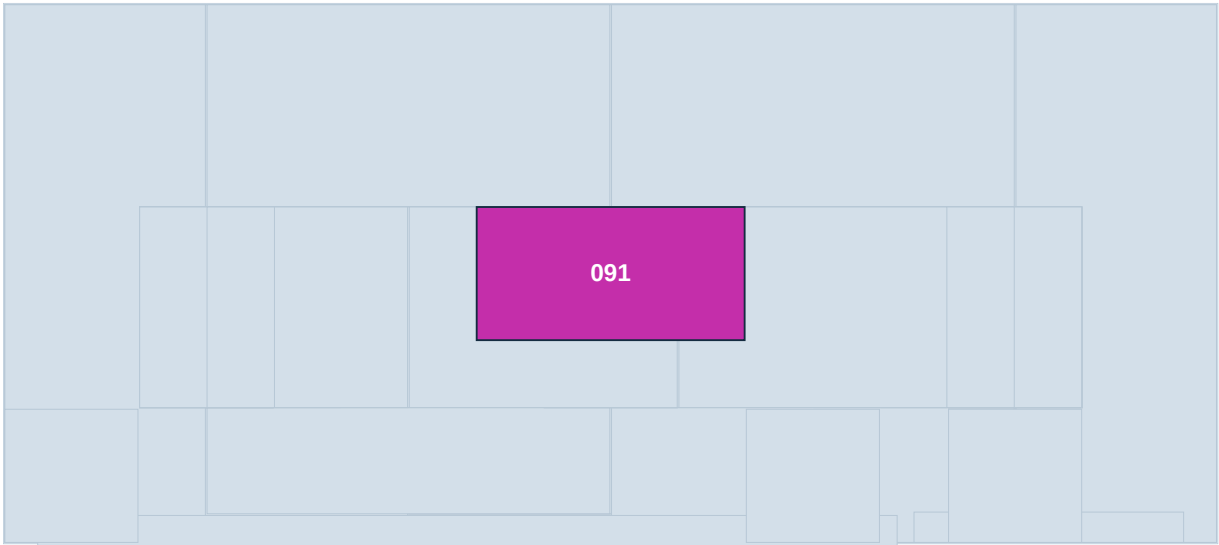

nominal 144 / grid 8.00


FRONT (-Y) / new parts enter from above (+Z)

A / STEP 23 OF 23

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

ADD 0 PART(S)

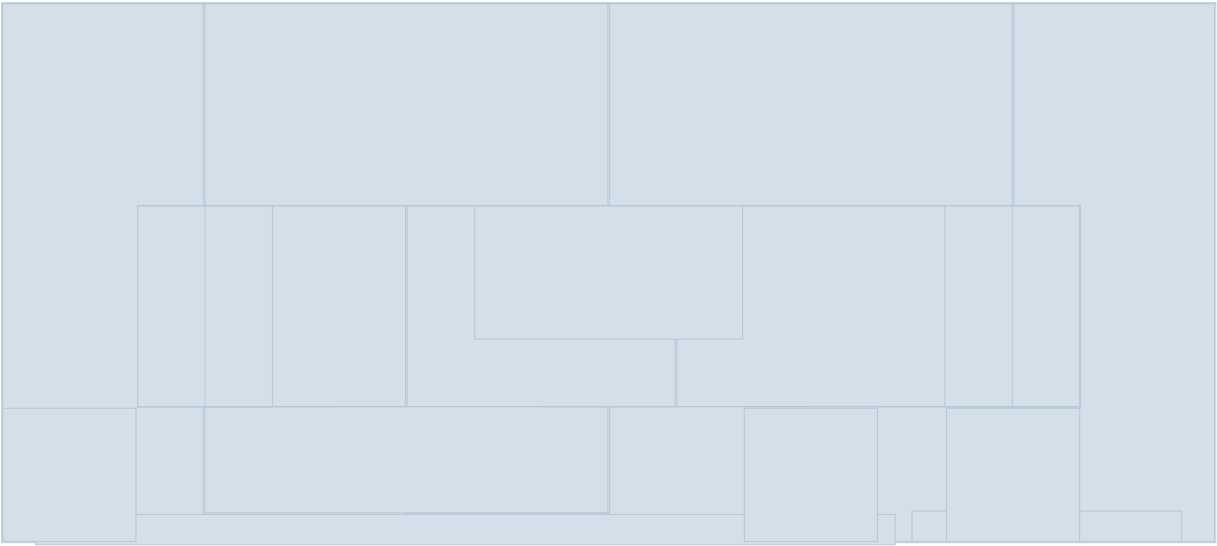


nominal 144 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

BASE3-03x08-T-48de52

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT




SIDE



TOP / PRINT ORIENTATION



BOTTOM / REAL CAVITIES



Kind: front_base

STL: BASE3-03x08-T-48de52.stl

STL units: mm / scale 100%

Grid: 3 x 8 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46

Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

Front row reserved (no stud/socket)


NP3 dovetail side allowance: 0.20

See front-interface.svg for sections

BASE3-03x08-T-80e081

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT



SIDE



Kind: front_base

STL: BASE3-03x08-T-80e081.stl

STL units: mm / scale 100%

Grid: 3 x 8 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46

Tube bore: 3.20 (not accessory fit)


Roof ribs: 1.20; bridge gap <=6.80

Front row reserved (no stud/socket)


NP3 dovetail side allowance: 0.20

See front-interface.svg for sections

TOP / PRINT ORIENTATION



BOTTOM / REAL CAVITIES



BASE3-06x08-T-7532db

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT




SIDE



TOP / PRINT ORIENTATION

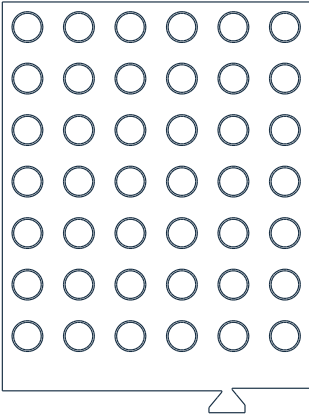

BOTTOM / REAL CAVITIES

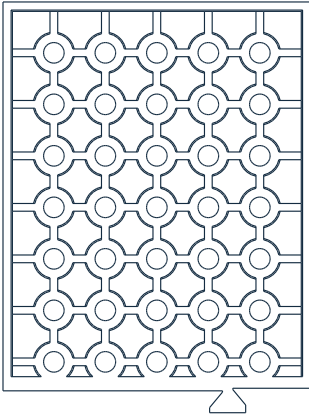

Kind: front_base

STL: BASE3-06x08-T-7532db.stl

STL units: mm / scale 100%

Grid: 6 x 8 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46

Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

Front row reserved (no stud/socket)


NP3 dovetail side allowance: 0.20

See front-interface.svg for sections

BASE3-06x08-T-7f51dc

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT

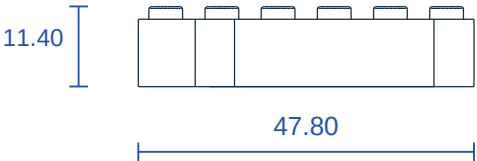


SIDE



TOP / PRINT ORIENTATION

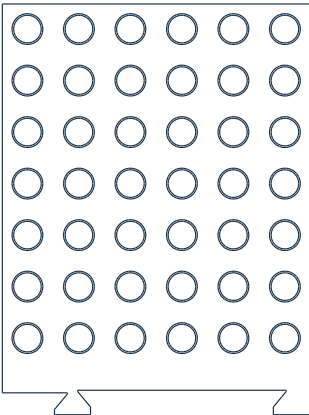

BOTTOM / REAL CAVITIES

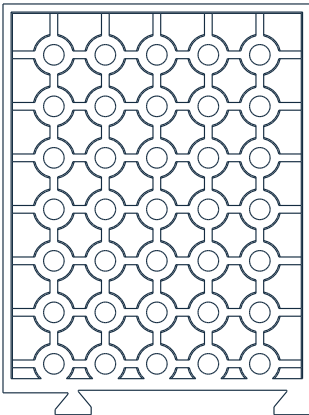

Kind: front_base

STL: BASE3-06x08-T-7f51dc.stl

STL units: mm / scale 100%

Grid: 6 x 8 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46

Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

Front row reserved (no stud/socket)


NP3 dovetail side allowance: 0.20

See front-interface.svg for sections


BASE3-06x08-T-9cb610

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT

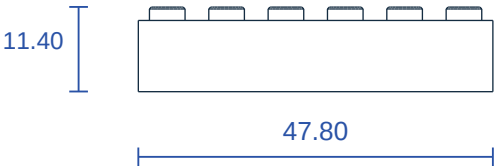


SIDE

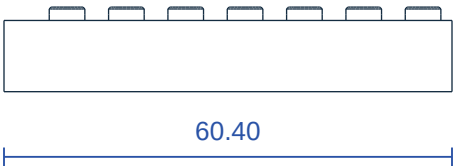

TOP / PRINT ORIENTATION

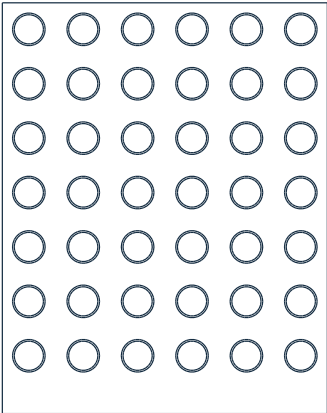

BOTTOM / REAL CAVITIES

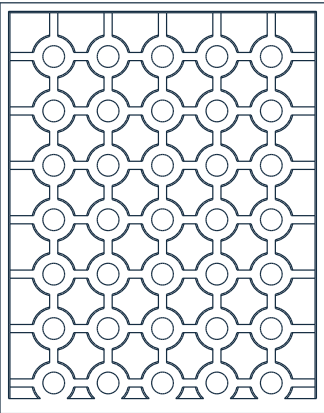

Kind: front_base

STL: BASE3-06x08-T-9cb610.stl

STL units: mm / scale 100%

Grid: 6 x 8 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46

Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

Front row reserved (no stud/socket)


NP3 dovetail side allowance: 0.20

See front-interface.svg for sections

BASE3-06x08-T-b8aa05

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT

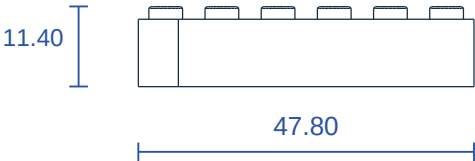


SIDE



TOP / PRINT ORIENTATION

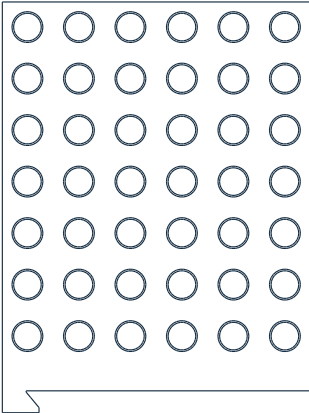

BOTTOM / REAL CAVITIES

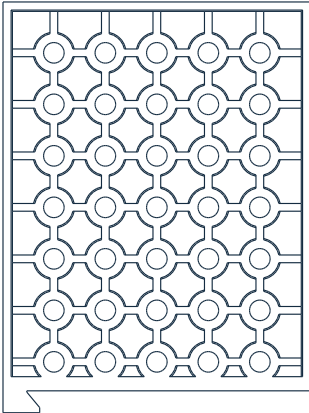

Kind: front_base

STL: BASE3-06x08-T-b8aa05.stl

STL units: mm / scale 100%

Grid: 6 x 8 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46

Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

Front row reserved (no stud/socket)

NP3 dovetail side allowance: 0.20

See front-interface.svg for sections


BASE3-18x08-B-a4853c

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT



SIDE



Kind: front_base

STL: BASE3-18x08-B-a4853c.stl

STL units: mm / scale 100%

Grid: 18 x 8 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46

Tube bore: 3.20 (not accessory fit)


Roof ribs: 1.20; bridge gap <=6.80

Front row reserved (no stud/socket)


NP3 dovetail side allowance: 0.20

See front-interface.svg for sections

TOP / PRINT ORIENTATION

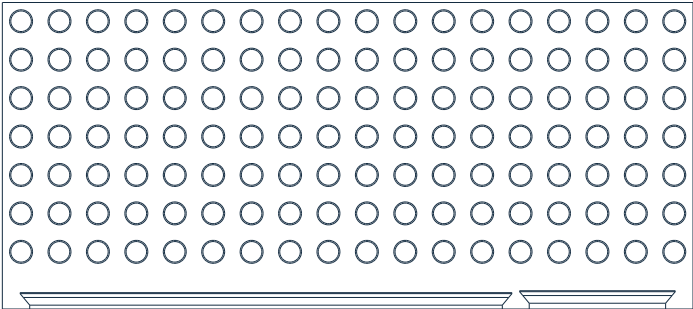


BOTTOM / REAL CAVITIES

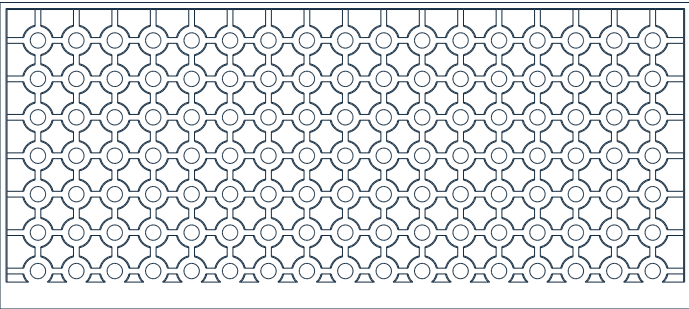


BR-01x02-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT



SIDE



TOP / PRINT ORIENTATION



BOTTOM / REAL CAVITIES




Kind: brick
STL: BR-01x02-H096.stl
STL units: mm / scale 100%
Grid: 1 x 2 @ 8.00
Body height: 9.60
Stud: dia 4.80 x 1.80 high
Tip lead-in: 0.25 high / radial
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80


BR-02x02-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT

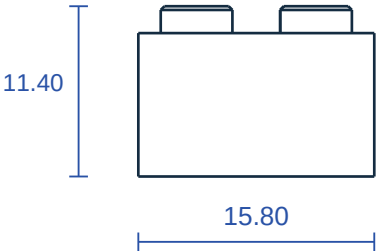


SIDE



TOP / PRINT ORIENTATION



BOTTOM / REAL CAVITIES



Kind: brick

STL: BR-02x02-H096.stl

STL units: mm / scale 100%

Grid: 2 x 2 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46


Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80


BR-02x03-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT

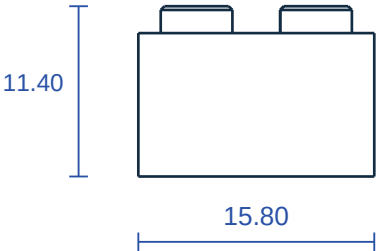


SIDE

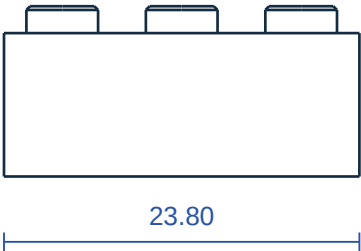

TOP / PRINT ORIENTATION



BOTTOM / REAL CAVITIES




Kind: brick
STL: BR-02x03-H096.stl
STL units: mm / scale 100%
Grid: 2 x 3 @ 8.00
Body height: 9.60
Stud: dia 4.80 x 1.80 high
Tip lead-in: 0.25 high / radial
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80


BR-03x02-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT

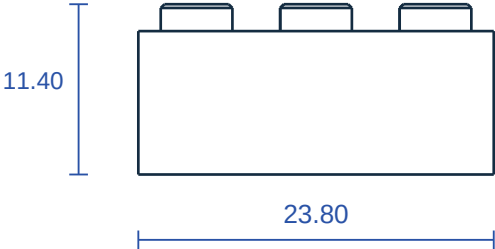


SIDE



TOP / PRINT ORIENTATION



BOTTOM / REAL CAVITIES




Kind: brick
STL: BR-03x02-H096.stl
STL units: mm / scale 100%
Grid: 3 x 2 @ 8.00
Body height: 9.60
Stud: dia 4.80 x 1.80 high
Tip lead-in: 0.25 high / radial
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80

BR-04x02-H032

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT

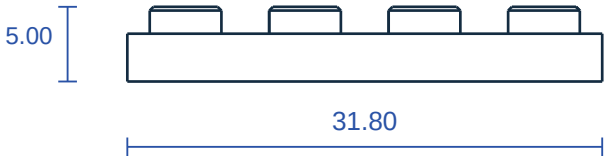


SIDE



TOP / PRINT ORIENTATION

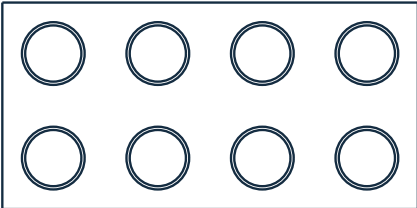

BOTTOM / REAL CAVITIES

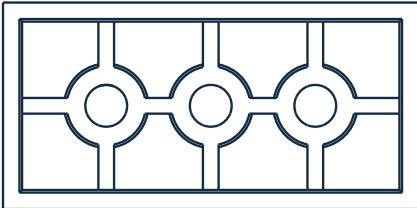


Kind: brick
STL: BR-04x02-H032.stl
STL units: mm / scale 100%
Grid: 4 x 2 @ 8.00
Body height: 3.20
Stud: dia 4.80 x 1.80 high
Tip lead-in: 0.25 high / radial
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80


BR-04x02-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT

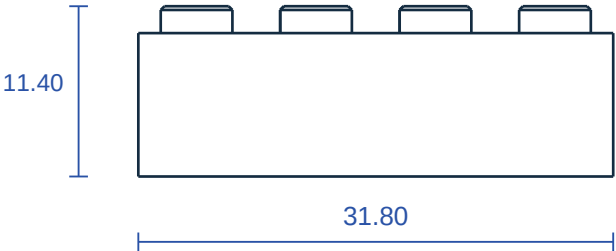


SIDE



TOP / PRINT ORIENTATION

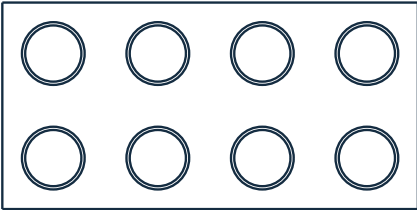

BOTTOM / REAL CAVITIES

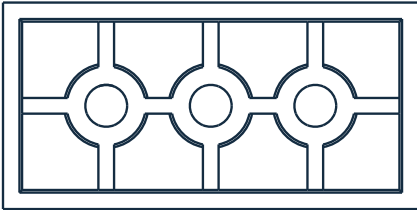

Kind: brick
STL: BR-04x02-H096.stl
STL units: mm / scale 100%
Grid: 4 x 2 @ 8.00
Body height: 9.60
Stud: dia 4.80 x 1.80 high
Tip lead-in: 0.25 high / radial
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80

BR-04x03-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT




SIDE



TOP / PRINT ORIENTATION

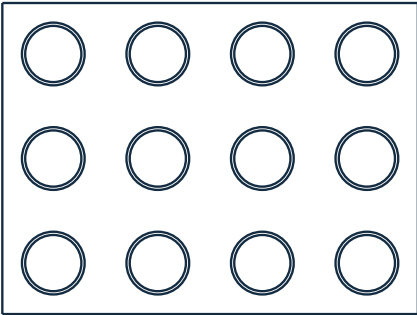

BOTTOM / REAL CAVITIES

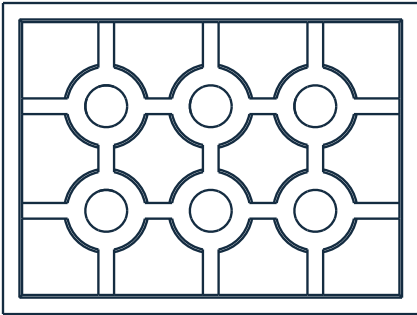


Kind: brick
STL: BR-04x03-H096.stl
STL units: mm / scale 100%
Grid: 4 x 3 @ 8.00
Body height: 9.60
Stud: dia 4.80 x 1.80 high
Tip lead-in: 0.25 high / radial
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80


NP3-KEEPER

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT




SIDE



TOP / PRINT ORIENTATION



BOTTOM / REAL CAVITIES



Kind: front_keeper
STL: NP3-KEEPER.stl
STL units: mm / scale 100%
Grid: 2 x 1 @ 8.00
Body height: 3.20
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80
Socket row at local Y=12.00
Flat front stop covers module top
Lift 6mm, then forward >=32mm and aside


NP3-LOGO-A

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT




SIDE




Kind: front_logo
STL: NP3-LOGO-A.stl
STL units: mm / scale 100%
Flat rear on bed / relief up
Carrier 2.40; side taper 2.00
Black to white after 2.80
White relief: 0.80; do not scale
Overall installed Z: 4.00 .. 44.00

TOP / PRINT ORIENTATION

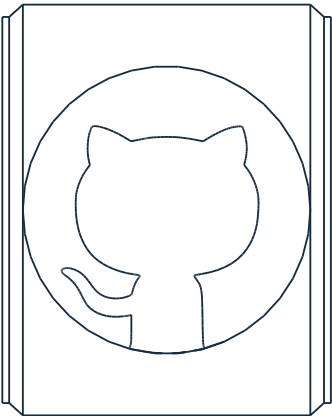


BOTTOM / REAL CAVITIES

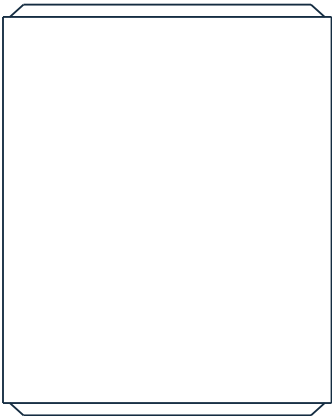


NP3-TEXT-A

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT



SIDE



Kind: front_plaque
STL: NP3-TEXT-A.stl
STL units: mm / scale 100%
Flat rear on bed / relief up
Carrier 2.40; side taper 2.00
Black to white after 2.40
White relief: 1.20; do not scale
Overall installed Z: 4.00 .. 44.00
Same icon, New adventures
github.com/USER

TOP / PRINT ORIENTATION



BOTTOM / REAL CAVITIES

