


B / DESK CLASSIC

Actual FreeCAD TechDraw projections; drawing dimensions, not a fit certification.

FRONT / face towards -Y

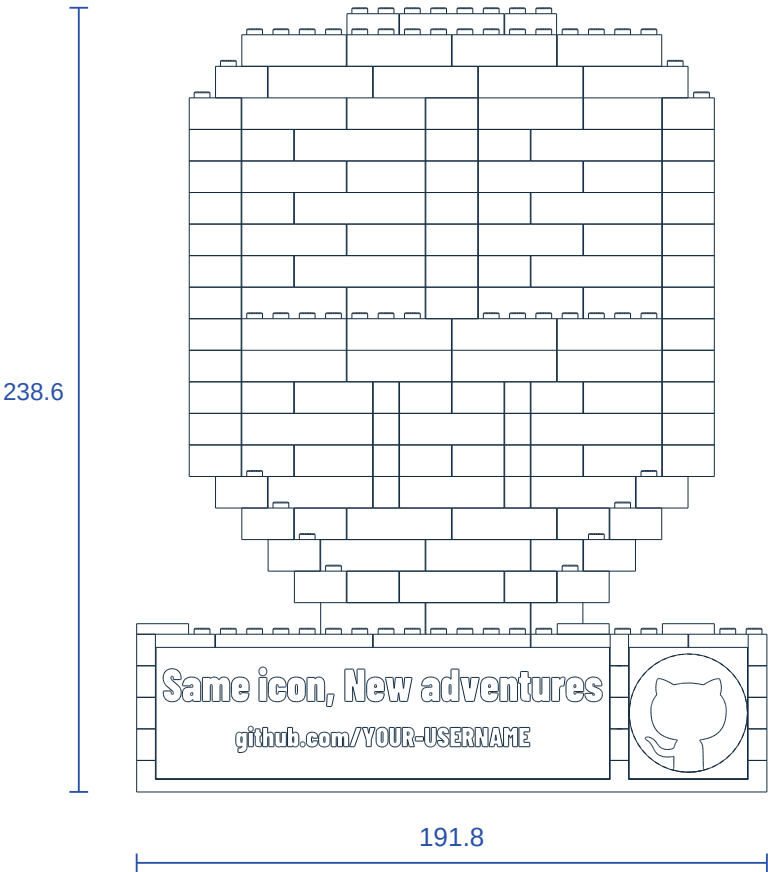


150 assembled parts / 28 numbered stages


Target: 192 x 80 x 238.4 (approx. height)

Measured CAD envelope: 191.8 x 79.8 x 238.6 incl. top studs

RIGHT SIDE

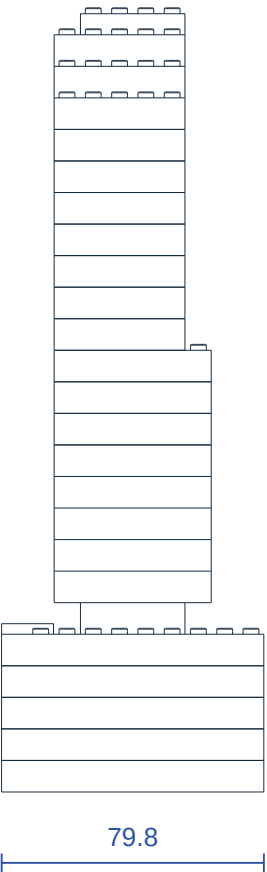


TOP / front at bottom

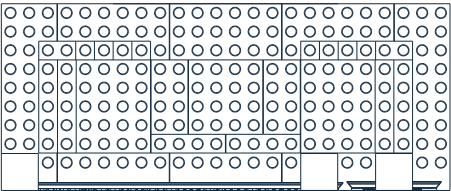

B / EXPLODED ASSEMBLY

CAD-derived exploded view; displacement is illustrative, dimensions are not changed.

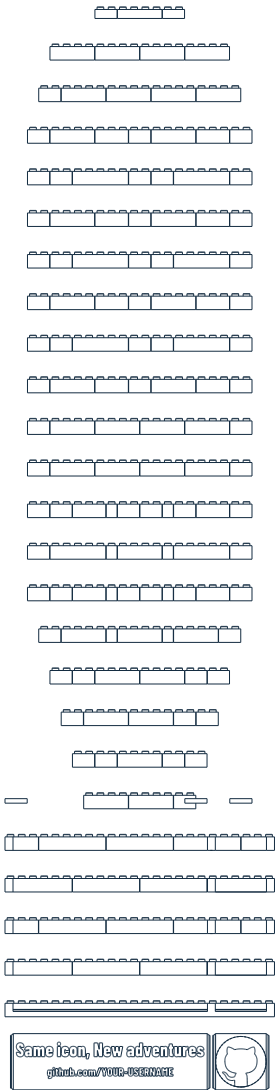

EXPLODED FRONT

Actual solids, displaced only for this view.

Exact WebGL 100% offsets, centered up/down.

Do not measure assembly height here.

Use overview for final outside dimensions.

Insert parts downward in numbered order.


Front modules release before spreading.

Stud engagement != verified physical clutch.

TEXT / flat printing view




RIGHT LOGO / supported relief



INTERFACE / SECTION & CLEARANCE


Project design candidates, NOT a proprietary tolerance standard. Geometry from FreeCAD planar sections.

SECTION: Y = 4.00 / TWO 2x2 BRICKS

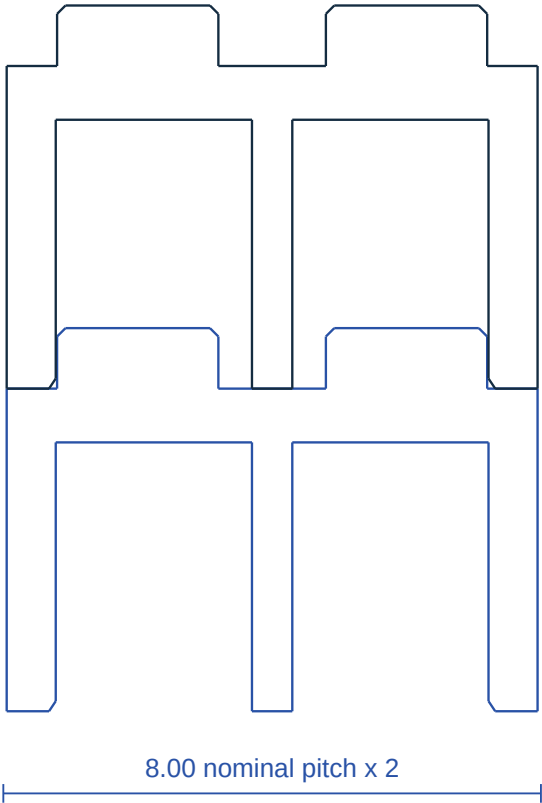

JOINT SECTION: Z = 10.50

Actual wall, tube, rib + mating stud outlines

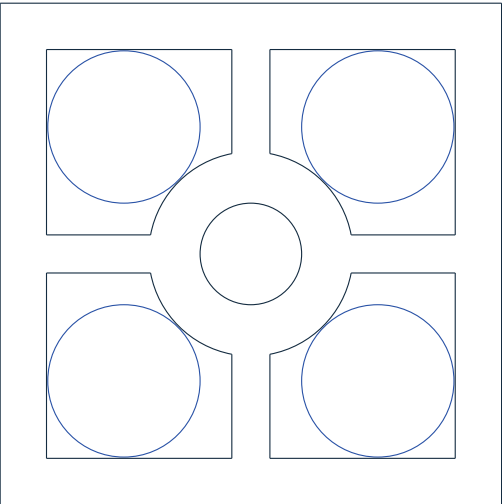

Blue: lower brick / black: upper socket

Reference stud dia 4.80; candidate height 1.80

Radial clearance $c=+0.04$ (default; untested)

Inside wall offset 1.56 / wall thickness 1.46

Tube OD 6.433708 / ID 3.20; grid rib 1.20

Tip lead-in 0.25 / female lead-in 0.20 x 0.30

Roof 1.60; thin plate roof 1.00


Thin plate / keeper: nominal headroom 0.40

No forced fit. Tune male and female separately.


NP3 / BASE-FRONT CAPTURE & REMOVAL

Actual BREP sections; precise dimensions apply to the nominal model, not guaranteed printed fit.

B / HORIZONTAL SECTION Z=24 / FRONT 8mm BAND

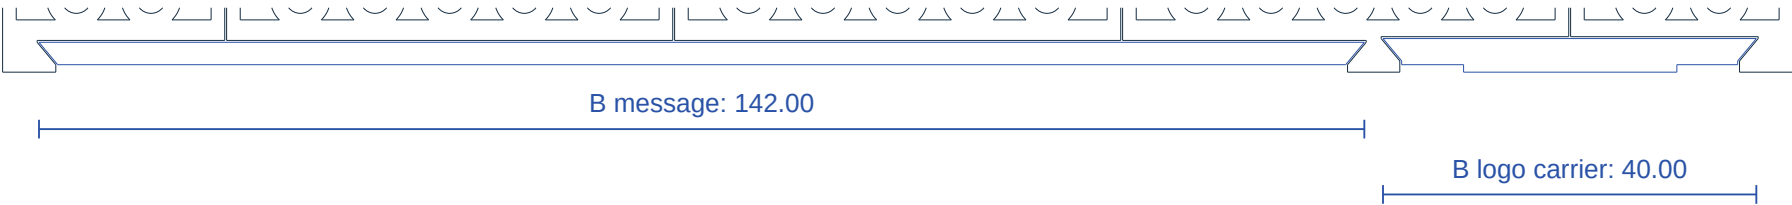

VERTICAL SECTION X=40

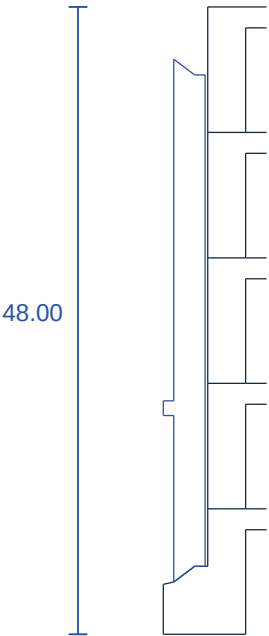

Blue: installed modules; black: actual receiver / keepers

Carrier thickness2.40 / rear flat0.80 / edge relief1.20

Rear width -> front width: 2.00 inset on each X side

Default side clearance0.20; coupon candidates0.15/0.20/0.25

Text backY=3.30; logo backY=3.70; relief frontY=0.10

Both front modules fit in Z=4.00..44.00, inside48mm base

3 separate up-stops: text2 / logo1; stud-grid mounting

Remove: up-stops up6, forward>=32; module up45

Thread / glue / magnet / purchased fastener not required

Physical clutch, retention, flatness and stability NOT tested

B / COLOR BOM / 1

One STL geometry may be printed in several colors. Use the quantities for this model only.

PART ID	COLOR	QTY	PRINT FILE
BASE3-03x10-T-aa77a9	black	2	parts/BASE3-03x10-T-aa77a9.stl
BASE3-03x10-T-d79875	black	2	parts/BASE3-03x10-T-d79875.stl
BASE3-06x10-T-3f87ac	black	2	parts/BASE3-06x10-T-3f87ac.stl
BASE3-06x10-T-6159e6	black	2	parts/BASE3-06x10-T-6159e6.stl
BASE3-06x10-T-6e100f	black	2	parts/BASE3-06x10-T-6e100f.stl
BASE3-06x10-T-838259	black	6	parts/BASE3-06x10-T-838259.stl
BASE3-06x10-T-e1945a	black	2	parts/BASE3-06x10-T-e1945a.stl
BASE3-24x10-B-562406	black	1	parts/BASE3-24x10-B-562406.stl
BR-01x04-H096	green	8	parts/BR-01x04-H096.stl
BR-02x04-H064	magenta	2	parts/BR-02x04-H064.stl
BR-02x04-H096	black	19	parts/BR-02x04-H096.stl
BR-02x04-H096	magenta	1	parts/BR-02x04-H096.stl
BR-02x05-H096	cyan	24	parts/BR-02x05-H096.stl
BR-02x06-H096	magenta	16	parts/BR-02x06-H096.stl
BR-03x04-H096	black	12	parts/BR-03x04-H096.stl
BR-04x04-H064	magenta	1	parts/BR-04x04-H064.stl
BR-04x04-H096	black	21	parts/BR-04x04-H096.stl
BR-04x04-H096	magenta	2	parts/BR-04x04-H096.stl
BR-04x05-H096	cyan	12	parts/BR-04x05-H096.stl
BR-05x04-H096	black	8	parts/BR-05x04-H096.stl
NP3-KEEPER	black	3	parts/NP3-KEEPER.stl
NP3-LOGO-B	black	1	parts/NP3-LOGO-B.stl
NP3-TEXT-B	black	1	parts/NP3-TEXT-B.stl

TEXT: black -> white at 2.4mm; LOGO: black -> white at 2.8mm. Separate plates.

Assembly: 150 pieces, including 2 front modules + 3 keepers. Coupons separate.

B / STEP 01 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

ADD 1 PART(S)

B-001 BLACK
BASE3-24x10-B-562406 @ 0,0,0



nominal 192 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

B / STEP 02 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

ADD 4 PART(S)

B-002 BLACK

BASE3-06x10-T-e1945a @ 0,0,9.6

B-003 BLACK


BASE3-06x10-T-838259 @ 48,0,9.6

B-004 BLACK

BASE3-06x10-T-3f87ac @ 96,0,9.6

B-005 BLACK

BASE3-06x10-T-6e100f @ 144,0,9.6

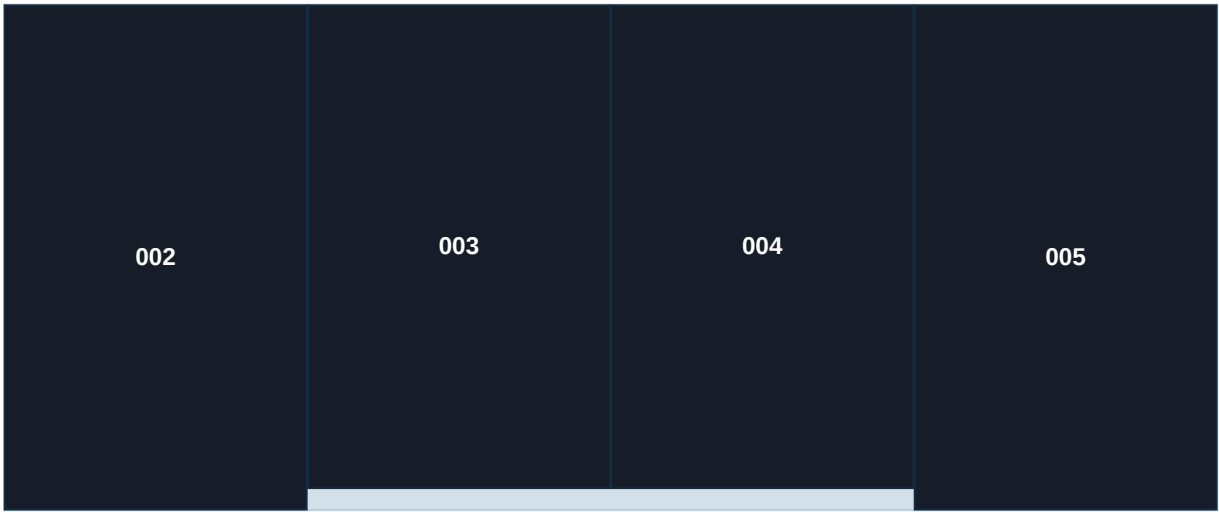


FRONT (-Y) / new parts enter from above (+Z)

B / STEP 03 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

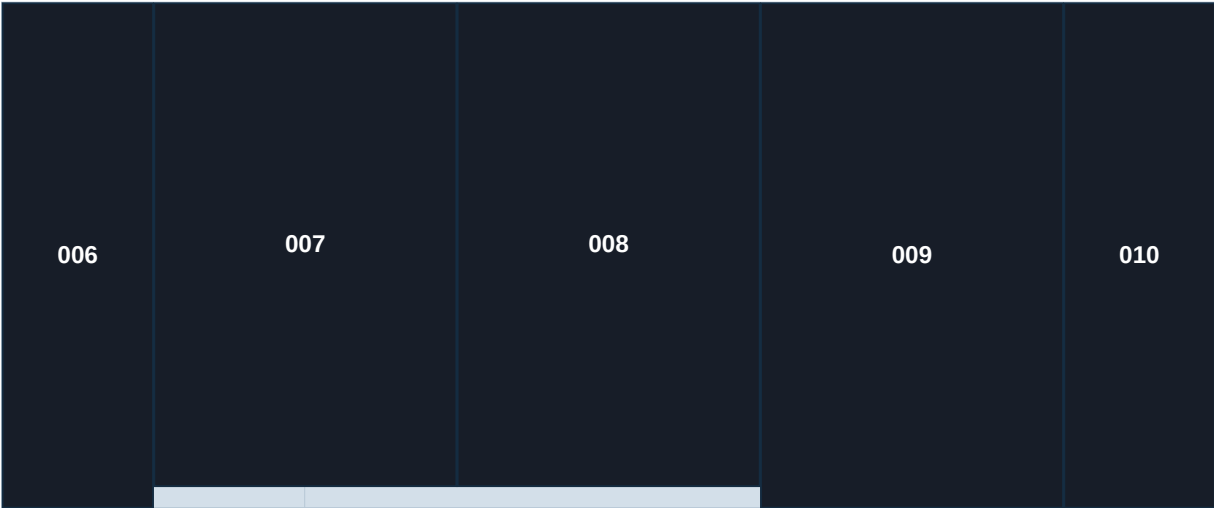

nominal 192 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 5 PART(S)

B-006 BLACK

BASE3-03x10-T-aa77a9 @ 0,0,19.2

B-007 BLACK

BASE3-06x10-T-838259 @ 24,0,19.2

B-008 BLACK

BASE3-06x10-T-838259 @ 72,0,19.2

B-009 BLACK

BASE3-06x10-T-6159e6 @ 120,0,19.2

B-010 BLACK

BASE3-03x10-T-d79875 @ 168,0,19.2

B / STEP 04 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

ADD 4 PART(S)

B-011 BLACK

BASE3-06x10-T-e1945a @ 0,0,28.8

B-012 BLACK


BASE3-06x10-T-838259 @ 48,0,28.8

B-013 BLACK

BASE3-06x10-T-3f87ac @ 96,0,28.8

B-014 BLACK

BASE3-06x10-T-6e100f @ 144,0,28.8

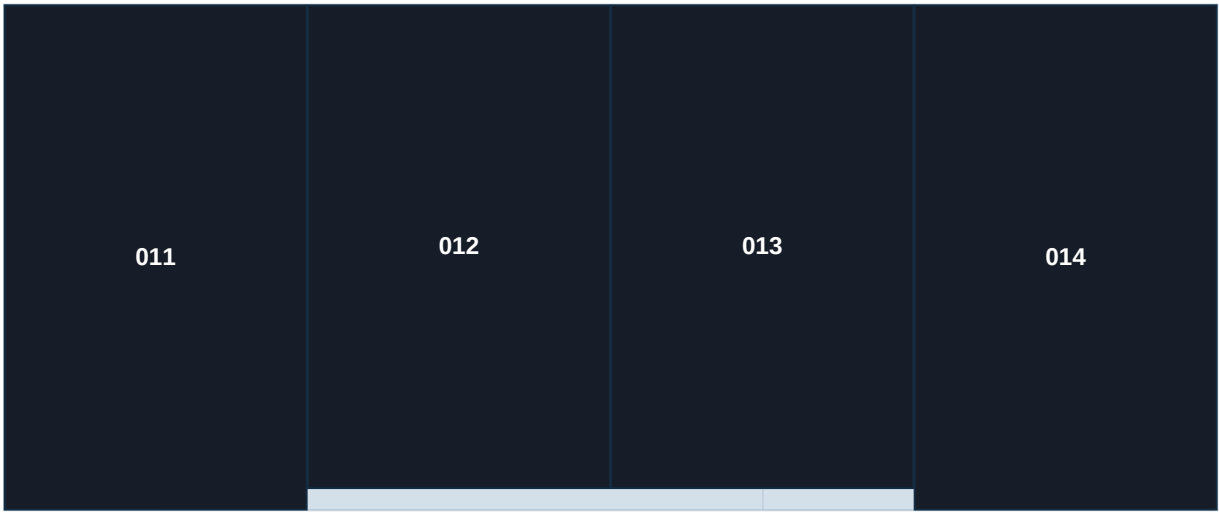


FRONT (-Y) / new parts enter from above (+Z)

B / STEP 05 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

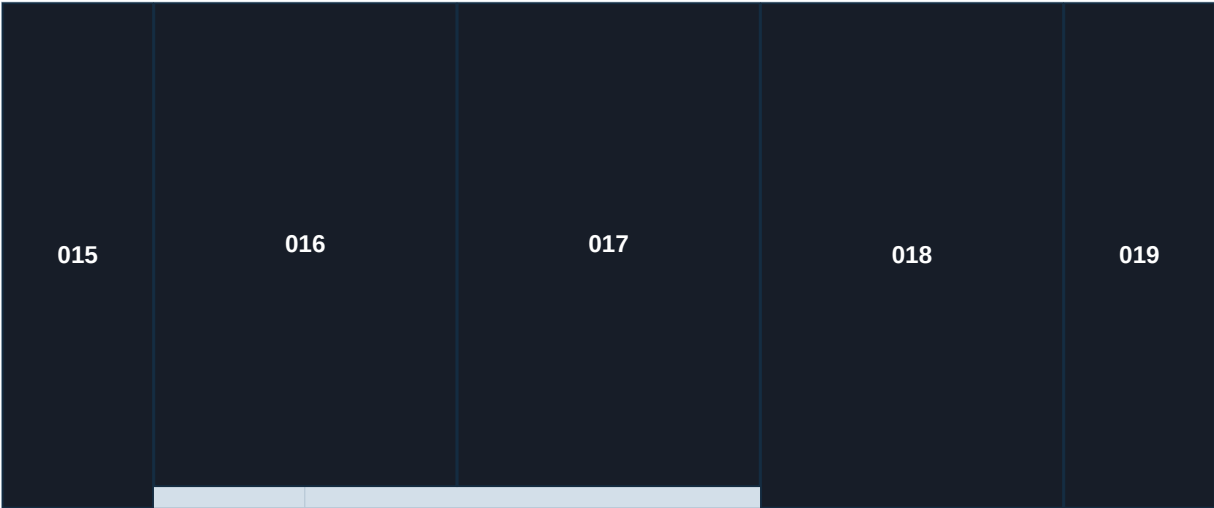

FRONT (-Y) / new parts enter from above (+Z)

ADD 5 PART(S)

B-015 BLACK
BASE3-03x10-T-aa77a9 @ 0,0,38.4

B-016 BLACK
BASE3-06x10-T-838259 @ 24,0,38.4

B-017 BLACK
BASE3-06x10-T-838259 @ 72,0,38.4

B-018 BLACK
BASE3-06x10-T-6159e6 @ 120,0,38.4

B-019 BLACK
BASE3-03x10-T-d79875 @ 168,0,38.4

B / STEP 06 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color


ADD 2 PART(S)

B-020 BLACK

NP3-TEXT-B @ 4,3,3,4

B-021 BLACK

NP3-LOGO-B @ 148,3,7,4

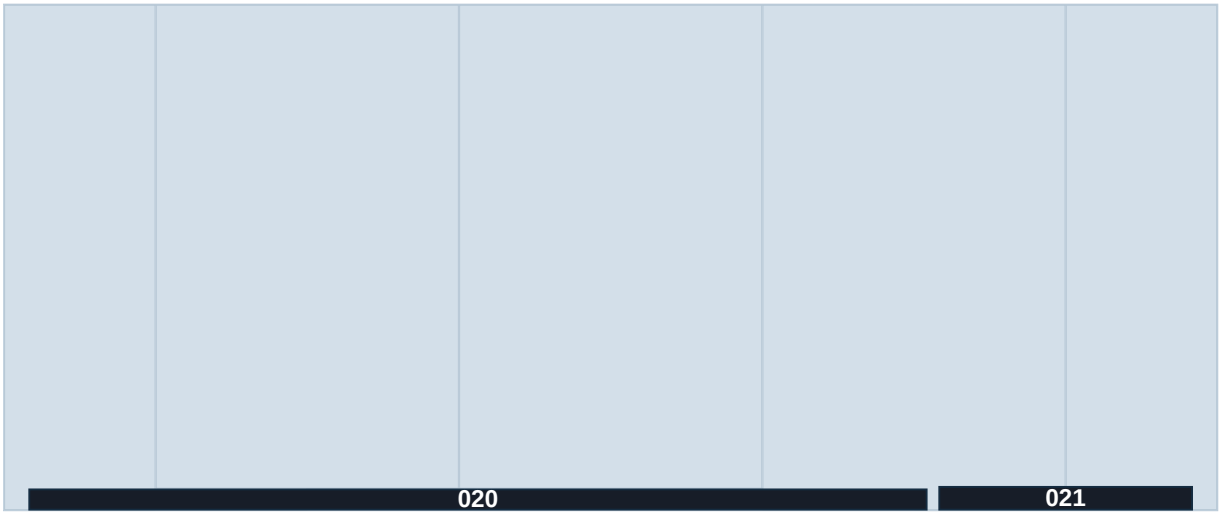

FRONT (-Y) / new parts enter from above (+Z)

B / STEP 07 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

ADD 3 PART(S)

B-022 BLACK

NP3-KEEPER @ 0,0,48

B-023 BLACK

NP3-KEEPER @ 128,0,48

B-024 BLACK

NP3-KEEPER @ 160,0,48



nominal 192 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

B / STEP 08 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

ADD 3 PART(S)

B-025 MAGENTA


BR-04x04-H096 @ 56,24,48

B-026 MAGENTA

BR-04x04-H096 @ 88,24,48

B-027 MAGENTA

BR-02x04-H096 @ 120,24,48

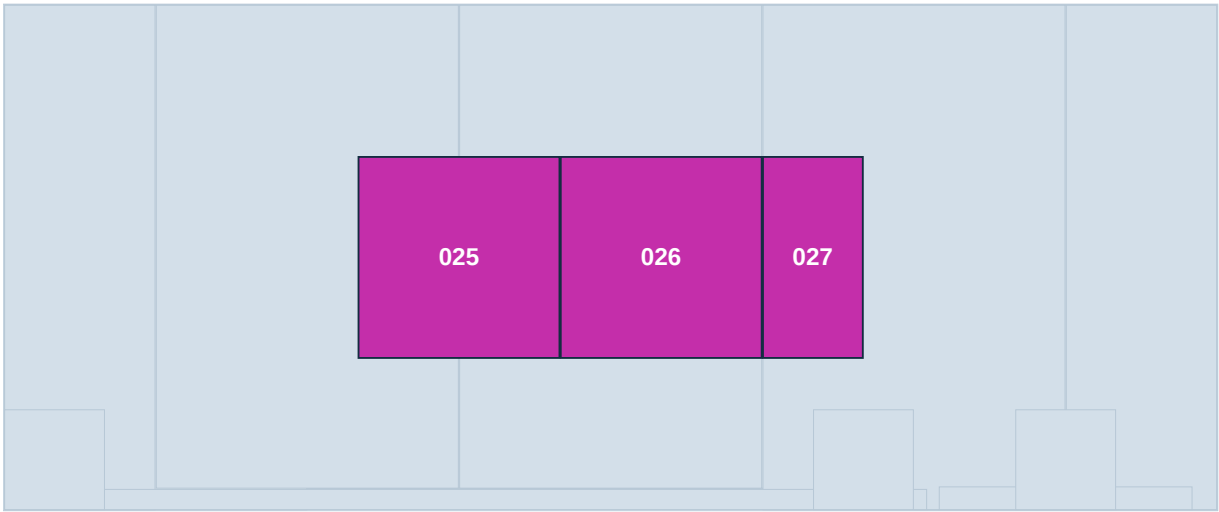


nominal 192 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

B / STEP 09 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

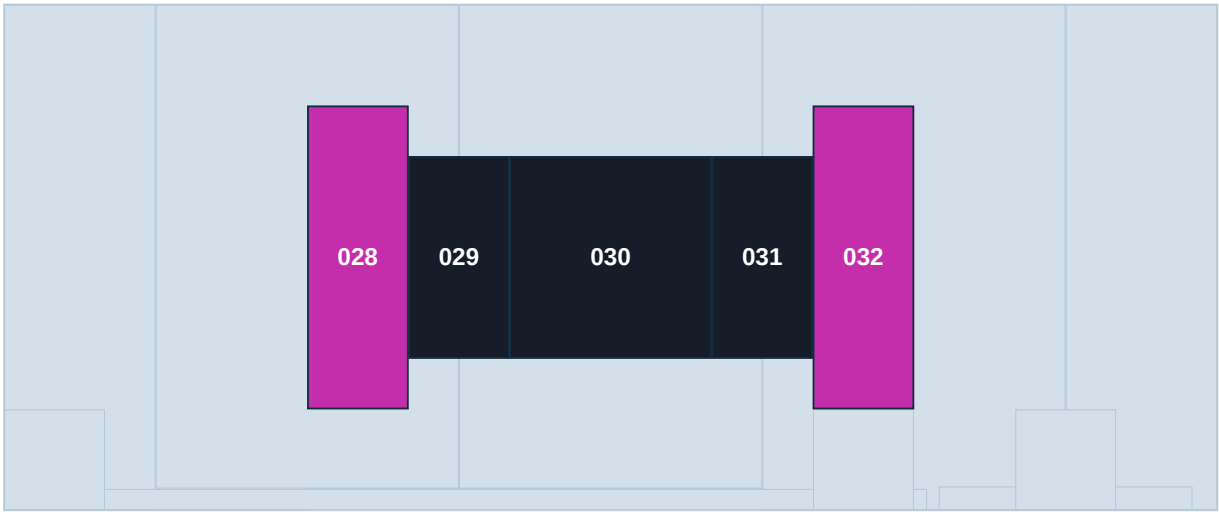

nominal 192 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 5 PART(S)

B-028 MAGENTA

BR-02x06-H096 @ 48,16,57.6

B-029 BLACK

BR-02x04-H096 @ 64,24,57.6

B-030 BLACK

BR-04x04-H096 @ 80,24,57.6

B-031 BLACK

BR-02x04-H096 @ 112,24,57.6


B-032 MAGENTA

BR-02x06-H096 @ 128,16,57.6

B / STEP 10 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

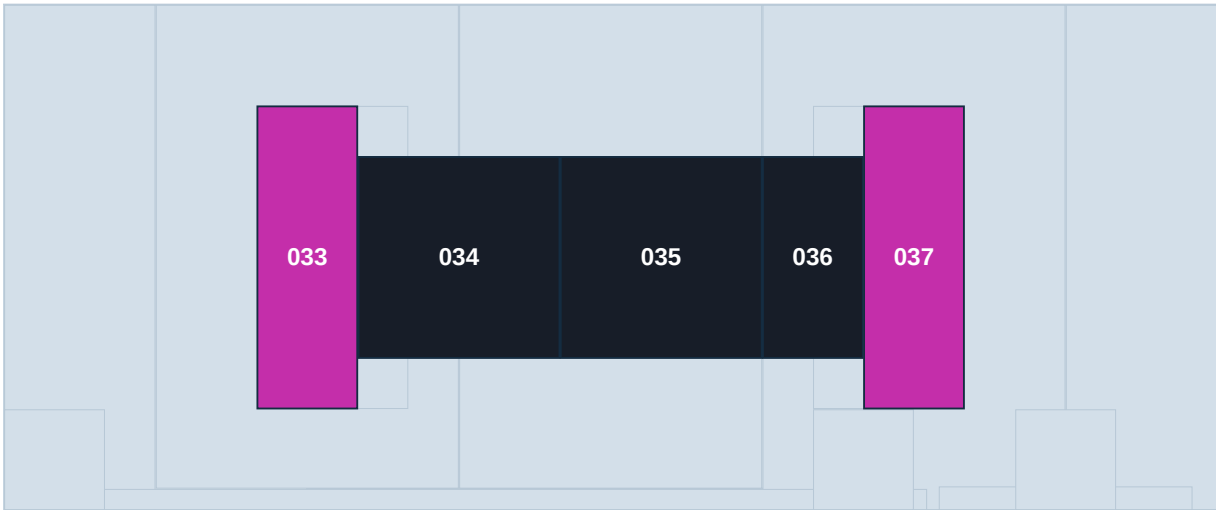

ADD 5 PART(S)

B-033 MAGENTA

BR-02x06-H096 @ 40,16,67.2

B-034 BLACK

BR-04x04-H096 @ 56,24,67.2

B-035 BLACK

BR-04x04-H096 @ 88,24,67.2

B-036 BLACK

BR-02x04-H096 @ 120,24,67.2

B-037 MAGENTA


BR-02x06-H096 @ 136,16,67.2

FRONT (-Y) / new parts enter from above (+Z)

B / STEP 11 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

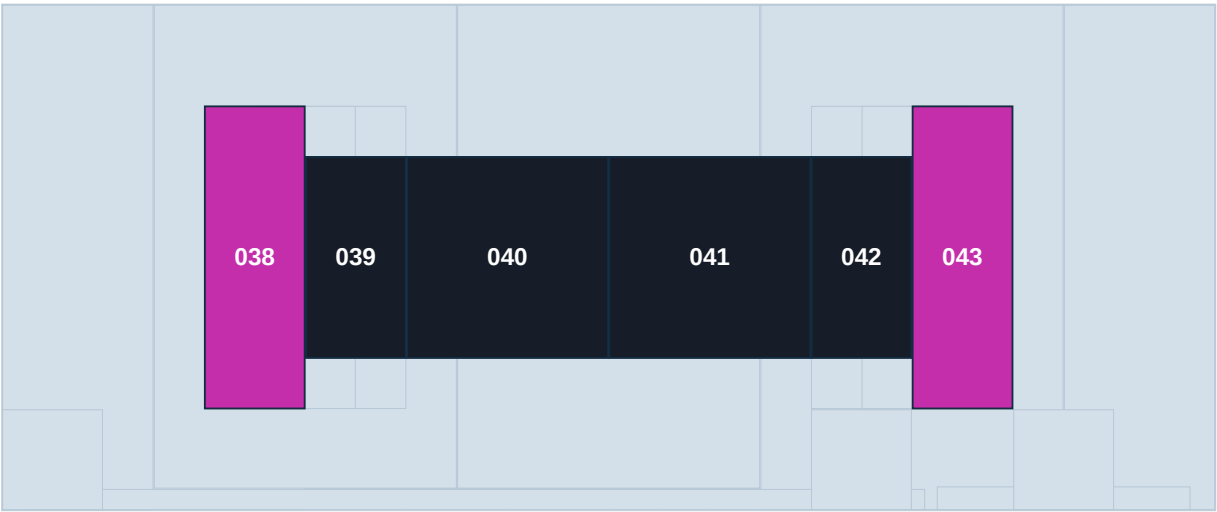

nominal 192 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)


ADD 6 PART(S)

- B-038 MAGENTA**
BR-02x06-H096 @ 32,16,76.8
- B-039 BLACK**
BR-02x04-H096 @ 48,24,76.8
- B-040 BLACK**
BR-04x04-H096 @ 64,24,76.8
- B-041 BLACK**
BR-04x04-H096 @ 96,24,76.8
- B-042 BLACK**
BR-02x04-H096 @ 128,24,76.8
- B-043 MAGENTA**
BR-02x06-H096 @ 144,16,76.8

B / STEP 12 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

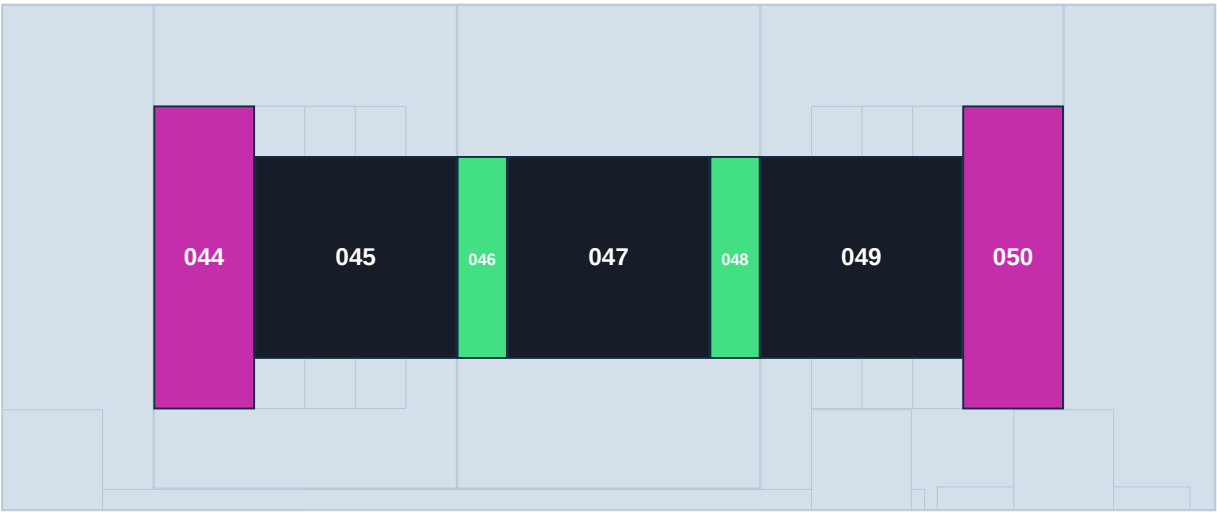

nominal 192 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 7 PART(S)

B-044 MAGENTA
BR-02x06-H096 @ 24,16,86.4

B-045 BLACK
BR-04x04-H096 @ 40,24,86.4

B-046 GREEN
BR-01x04-H096 @ 72,24,86.4

B-047 BLACK
BR-04x04-H096 @ 80,24,86.4

B-048 GREEN
BR-01x04-H096 @ 112,24,86.4

B-049 BLACK
BR-04x04-H096 @ 120,24,86.4

B-050 MAGENTA
BR-02x06-H096 @ 152,16,86.4

B / STEP 13 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color



nominal 192 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 10 PART(S)

B-051 MAGENTA

BR-02x06-H096 @ 16,16,96

B-052 BLACK

BR-02x04-H096 @ 32,24,96

B-053 BLACK

BR-03x04-H096 @ 48,24,96

B-054 GREEN

BR-01x04-H096 @ 72,24,96

B-055 BLACK

BR-02x04-H096 @ 80,24,96

B-056 BLACK

BR-02x04-H096 @ 96,24,96

B-057 GREEN

BR-01x04-H096 @ 112,24,96

B-058 BLACK

BR-02x04-H096 @ 120,24,96

B-059 BLACK

BR-03x04-H096 @ 136,24,96


B-060 MAGENTA

BR-02x06-H096 @ 160,16,96

B / STEP 14 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

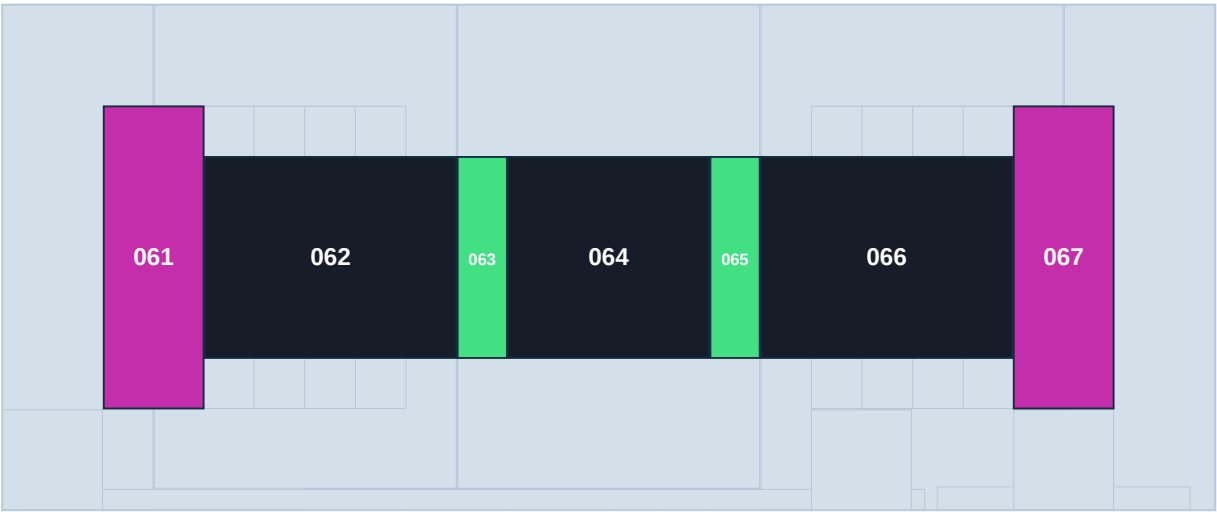

nominal 192 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 7 PART(S)

B-061 MAGENTA

BR-02x06-H096 @ 16,16,105.6

B-062 BLACK

BR-05x04-H096 @ 32,24,105.6

B-063 GREEN

BR-01x04-H096 @ 72,24,105.6

B-064 BLACK

BR-04x04-H096 @ 80,24,105.6

B-065 GREEN

BR-01x04-H096 @ 112,24,105.6

B-066 BLACK

BR-05x04-H096 @ 120,24,105.6

B-067 MAGENTA

BR-02x06-H096 @ 160,16,105.6

B / STEP 15 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color



nominal 192 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 10 PART(S)

B-068 MAGENTA

BR-02x06-H096 @ 16,16,115.2

B-069 BLACK

BR-02x04-H096 @ 32,24,115.2

B-070 BLACK

BR-03x04-H096 @ 48,24,115.2

B-071 GREEN

BR-01x04-H096 @ 72,24,115.2

B-072 BLACK

BR-02x04-H096 @ 80,24,115.2

B-073 BLACK

BR-02x04-H096 @ 96,24,115.2

B-074 GREEN

BR-01x04-H096 @ 112,24,115.2

B-075 BLACK

BR-02x04-H096 @ 120,24,115.2

B-076 BLACK

BR-03x04-H096 @ 136,24,115.2

B-077 MAGENTA

BR-02x06-H096 @ 160,16,115.2

B / STEP 16 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color



nominal 192 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 6 PART(S)

B-078 MAGENTA

BR-02x06-H096 @ 16,16,124.8

B-079 BLACK

BR-04x04-H096 @ 32,24,124.8

B-080 BLACK

BR-04x04-H096 @ 64,24,124.8

B-081 BLACK

BR-04x04-H096 @ 96,24,124.8

B-082 BLACK

BR-04x04-H096 @ 128,24,124.8


B-083 MAGENTA

BR-02x06-H096 @ 160,16,124.8

B / STEP 17 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

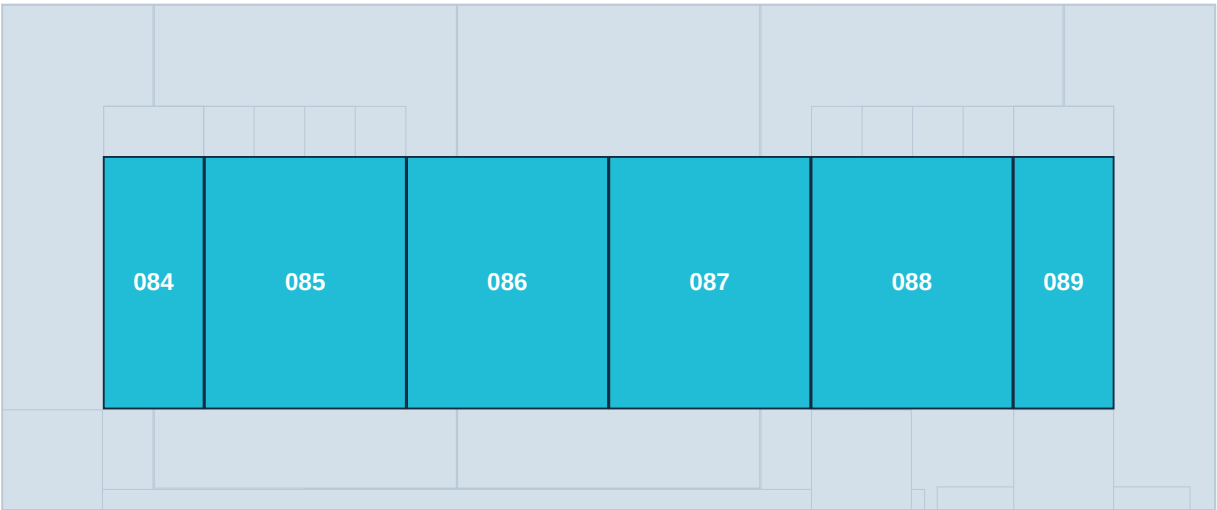

nominal 192 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 6 PART(S)

B-084 CYAN

BR-02x05-H096 @ 16,16,134.4

B-085 CYAN

BR-04x05-H096 @ 32,16,134.4

B-086 CYAN

BR-04x05-H096 @ 64,16,134.4

B-087 CYAN

BR-04x05-H096 @ 96,16,134.4

B-088 CYAN

BR-04x05-H096 @ 128,16,134.4


B-089 CYAN

BR-02x05-H096 @ 160,16,134.4

B / STEP 18 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

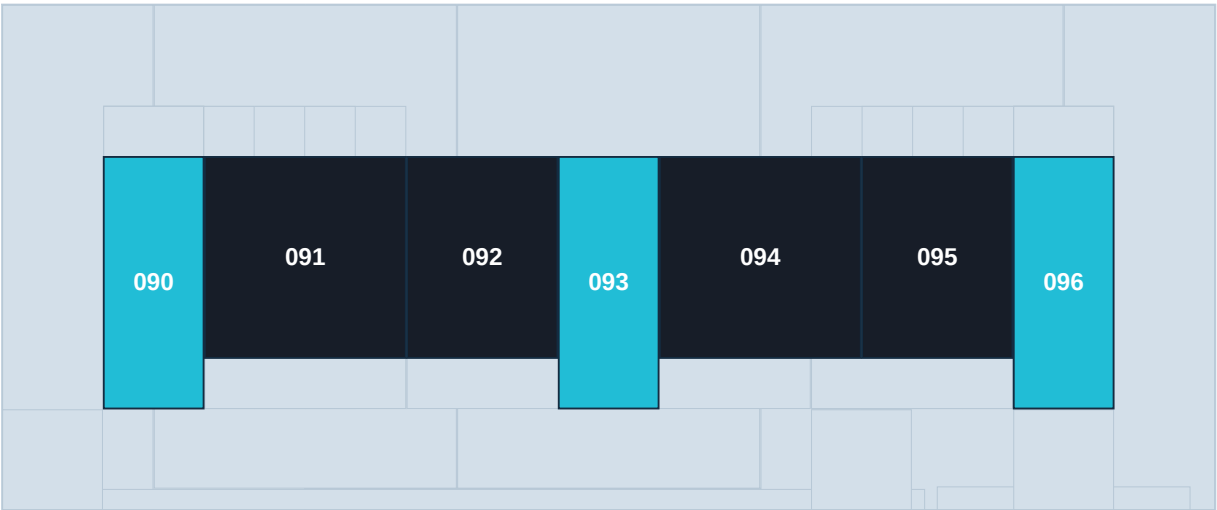

nominal 192 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)


ADD 7 PART(S)

- B-090 CYAN**
BR-02x05-H096 @ 16,16,144
- B-091 BLACK**
BR-04x04-H096 @ 32,24,144
- B-092 BLACK**
BR-03x04-H096 @ 64,24,144
- B-093 CYAN**
BR-02x05-H096 @ 88,16,144
- B-094 BLACK**
BR-04x04-H096 @ 104,24,144
- B-095 BLACK**
BR-03x04-H096 @ 136,24,144
- B-096 CYAN**
BR-02x05-H096 @ 160,16,144

B / STEP 19 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

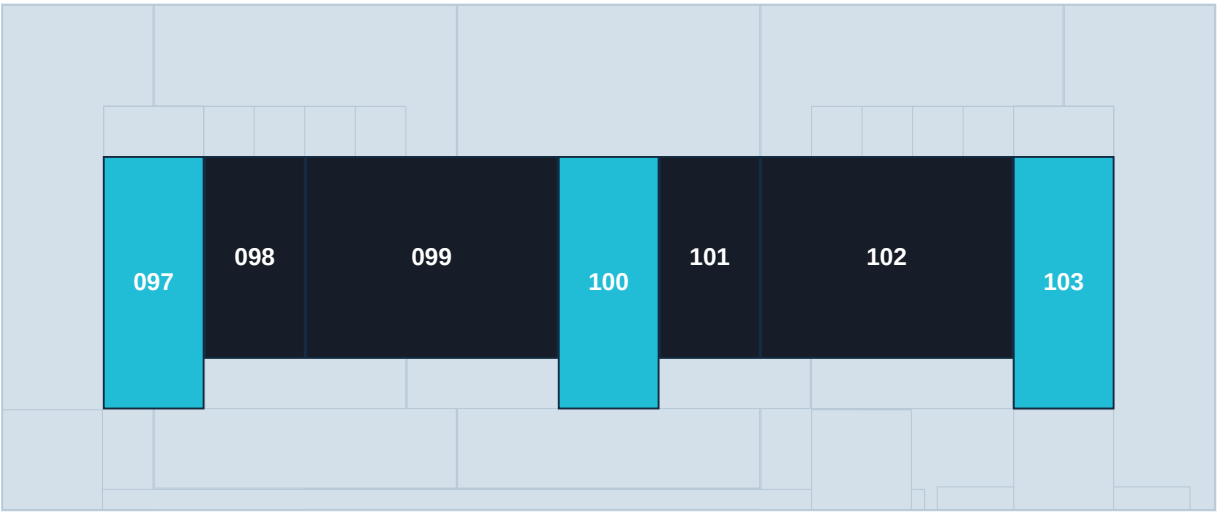

nominal 192 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 7 PART(S)

B-097 CYAN

BR-02x05-H096 @ 16,16,153.6

B-098 BLACK

BR-02x04-H096 @ 32,24,153.6

B-099 BLACK

BR-05x04-H096 @ 48,24,153.6

B-100 CYAN

BR-02x05-H096 @ 88,16,153.6

B-101 BLACK

BR-02x04-H096 @ 104,24,153.6

B-102 BLACK

BR-05x04-H096 @ 120,24,153.6


B-103 CYAN

BR-02x05-H096 @ 160,16,153.6

B / STEP 20 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

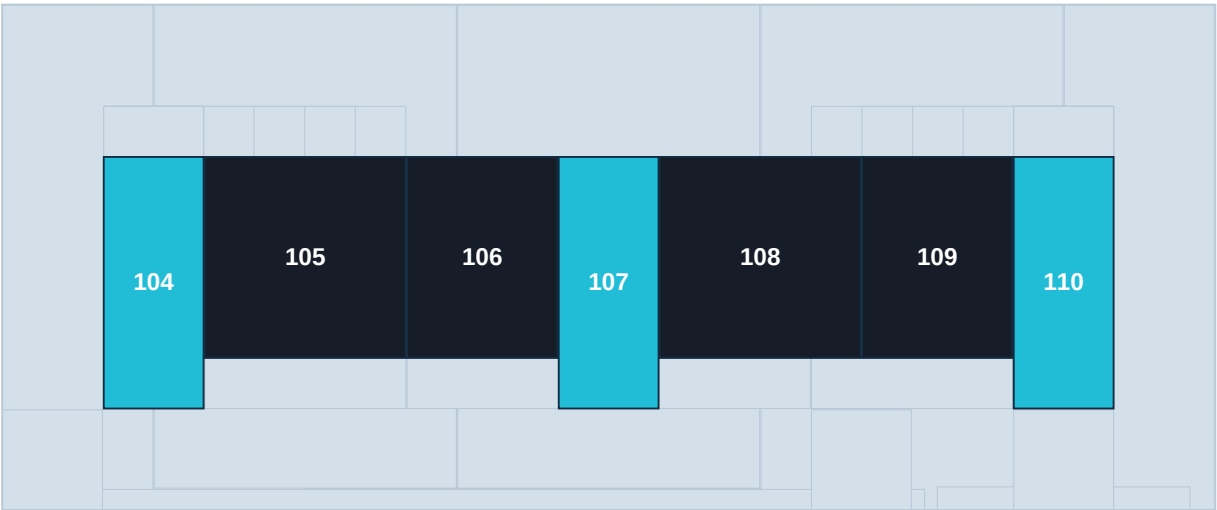

nominal 192 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 7 PART(S)

B-104 CYAN

BR-02x05-H096 @ 16,16,163.2

B-105 BLACK

BR-04x04-H096 @ 32,24,163.2

B-106 BLACK

BR-03x04-H096 @ 64,24,163.2

B-107 CYAN

BR-02x05-H096 @ 88,16,163.2

B-108 BLACK

BR-04x04-H096 @ 104,24,163.2

B-109 BLACK

BR-03x04-H096 @ 136,24,163.2


B-110 CYAN

BR-02x05-H096 @ 160,16,163.2

B / STEP 21 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

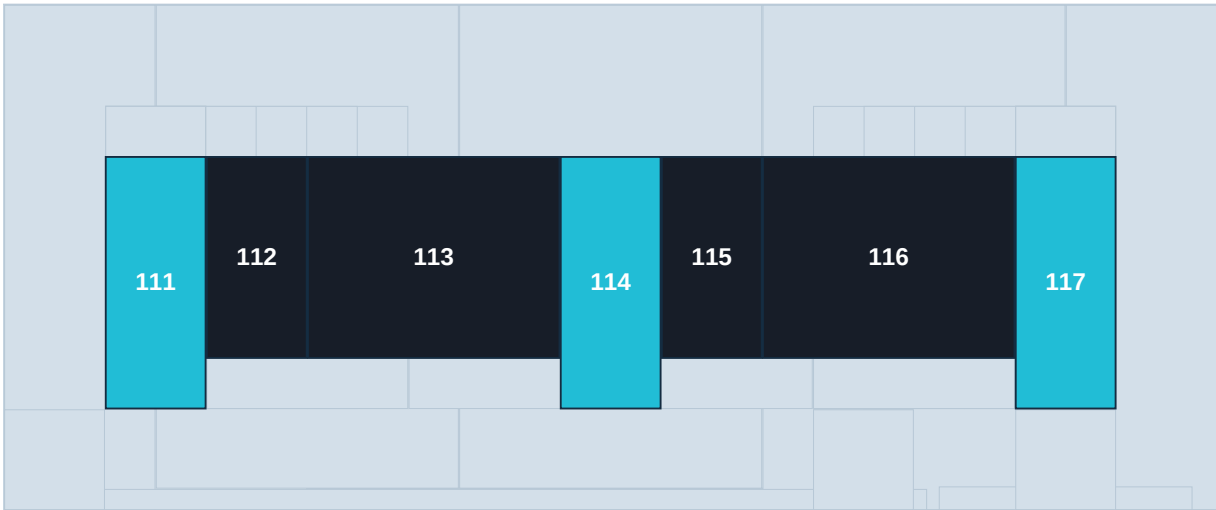

nominal 192 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 7 PART(S)

B-111 CYAN

BR-02x05-H096 @ 16,16,172.8

B-112 BLACK

BR-02x04-H096 @ 32,24,172.8

B-113 BLACK

BR-05x04-H096 @ 48,24,172.8

B-114 CYAN

BR-02x05-H096 @ 88,16,172.8

B-115 BLACK

BR-02x04-H096 @ 104,24,172.8

B-116 BLACK

BR-05x04-H096 @ 120,24,172.8


B-117 CYAN

BR-02x05-H096 @ 160,16,172.8

B / STEP 22 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

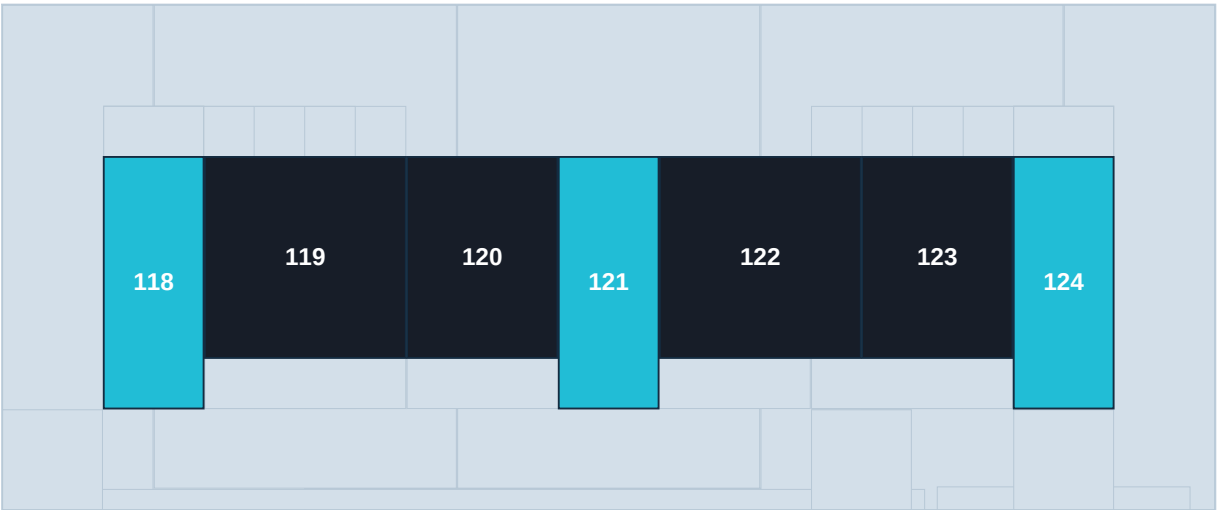

nominal 192 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 7 PART(S)

B-118 CYAN

BR-02x05-H096 @ 16,16,182.4

B-119 BLACK

BR-04x04-H096 @ 32,24,182.4

B-120 BLACK

BR-03x04-H096 @ 64,24,182.4

B-121 CYAN

BR-02x05-H096 @ 88,16,182.4

B-122 BLACK

BR-04x04-H096 @ 104,24,182.4

B-123 BLACK

BR-03x04-H096 @ 136,24,182.4


B-124 CYAN

BR-02x05-H096 @ 160,16,182.4

B / STEP 23 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

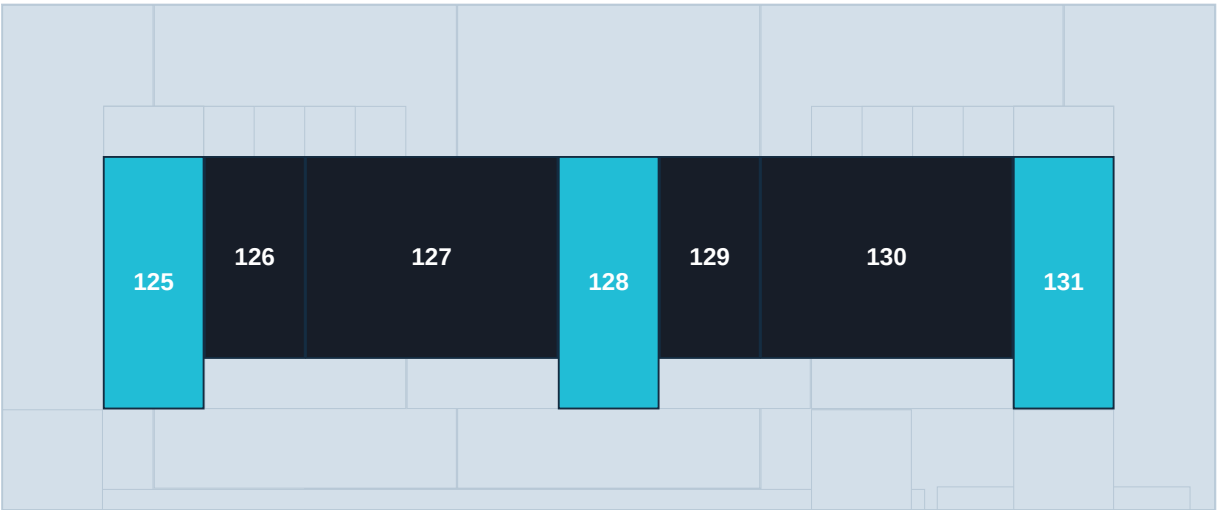

nominal 192 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 7 PART(S)

B-125 CYAN
BR-02x05-H096 @ 16,16,192

B-126 BLACK
BR-02x04-H096 @ 32,24,192

B-127 BLACK
BR-05x04-H096 @ 48,24,192

B-128 CYAN
BR-02x05-H096 @ 88,16,192

B-129 BLACK
BR-02x04-H096 @ 104,24,192


B-130 BLACK
BR-05x04-H096 @ 120,24,192

B-131 CYAN
BR-02x05-H096 @ 160,16,192

B / STEP 24 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

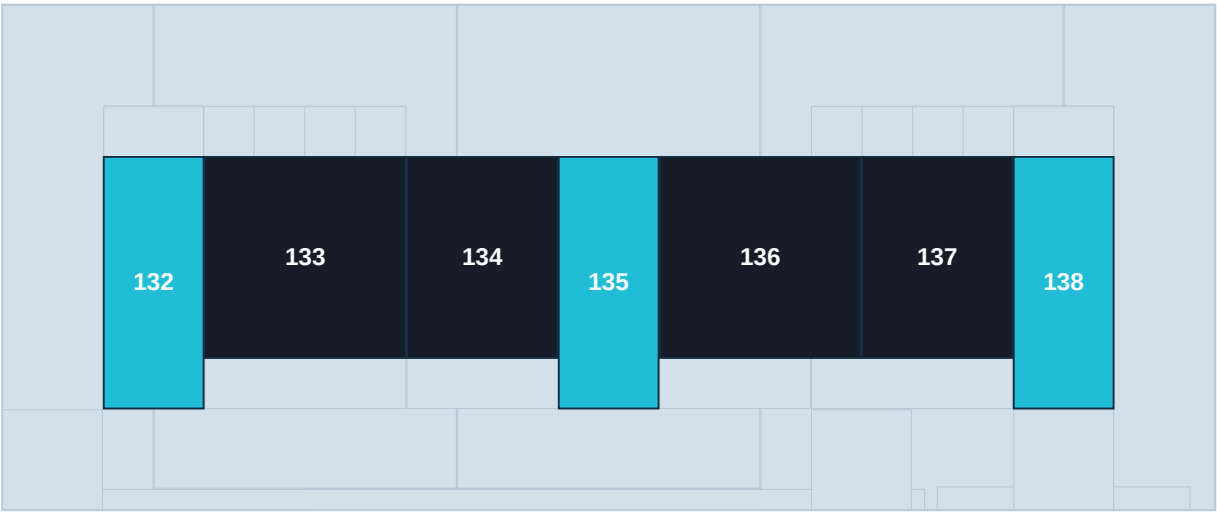

nominal 192 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 7 PART(S)

B-132 CYAN
BR-02x05-H096 @ 16,16,201.6

B-133 BLACK
BR-04x04-H096 @ 32,24,201.6

B-134 BLACK
BR-03x04-H096 @ 64,24,201.6

B-135 CYAN
BR-02x05-H096 @ 88,16,201.6

B-136 BLACK
BR-04x04-H096 @ 104,24,201.6


B-137 BLACK
BR-03x04-H096 @ 136,24,201.6

B-138 CYAN
BR-02x05-H096 @ 160,16,201.6

B / STEP 25 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

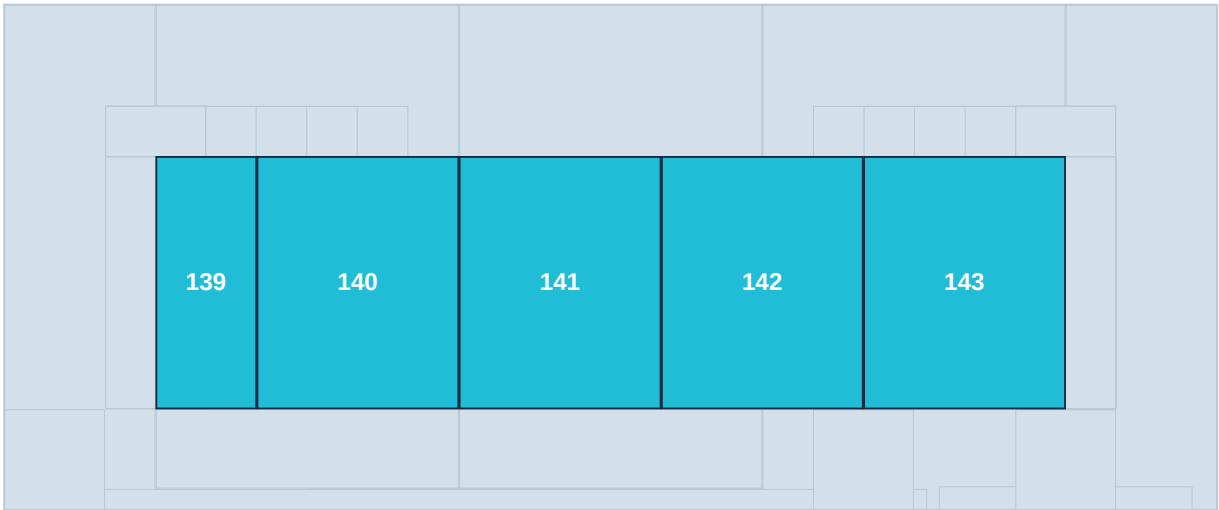

nominal 192 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 5 PART(S)

B-139 CYAN

BR-02x05-H096 @ 24,16,211.2

B-140 CYAN

BR-04x05-H096 @ 40,16,211.2

B-141 CYAN

BR-04x05-H096 @ 72,16,211.2

B-142 CYAN

BR-04x05-H096 @ 104,16,211.2

B-143 CYAN

BR-04x05-H096 @ 136,16,211.2

B / STEP 26 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

ADD 4 PART(S)

B-144 CYAN

BR-04x05-H096 @ 32,16,220.8

B-145 CYAN


BR-04x05-H096 @ 64,16,220.8

B-146 CYAN

BR-04x05-H096 @ 96,16,220.8

B-147 CYAN

BR-04x05-H096 @ 128,16,220.8

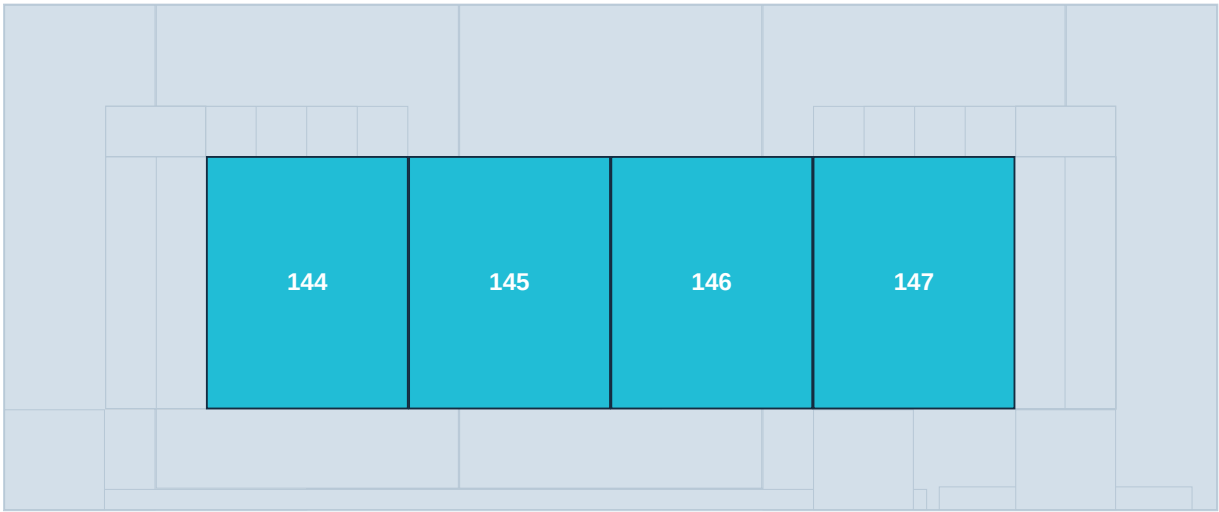

nominal 192 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

B / STEP 27 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

ADD 3 PART(S)

B-148 MAGENTA


BR-02x04-H064 @ 64,24,230.4

B-149 MAGENTA

BR-04x04-H064 @ 80,24,230.4

B-150 MAGENTA

BR-02x04-H064 @ 112,24,230.4

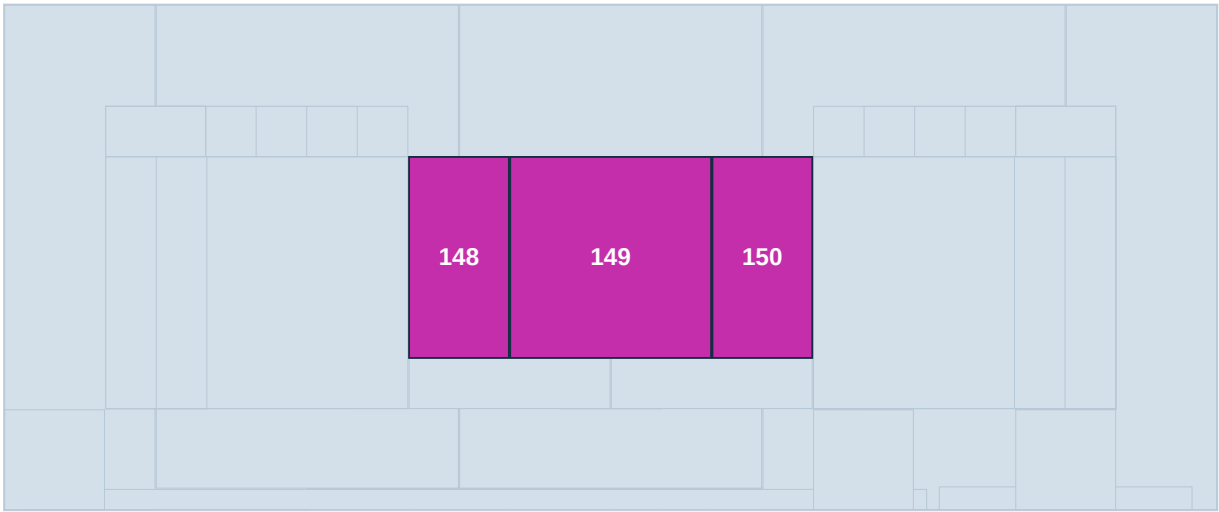

nominal 192 / grid 8.00


FRONT (-Y) / new parts enter from above (+Z)

B / STEP 28 OF 28

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

ADD 0 PART(S)

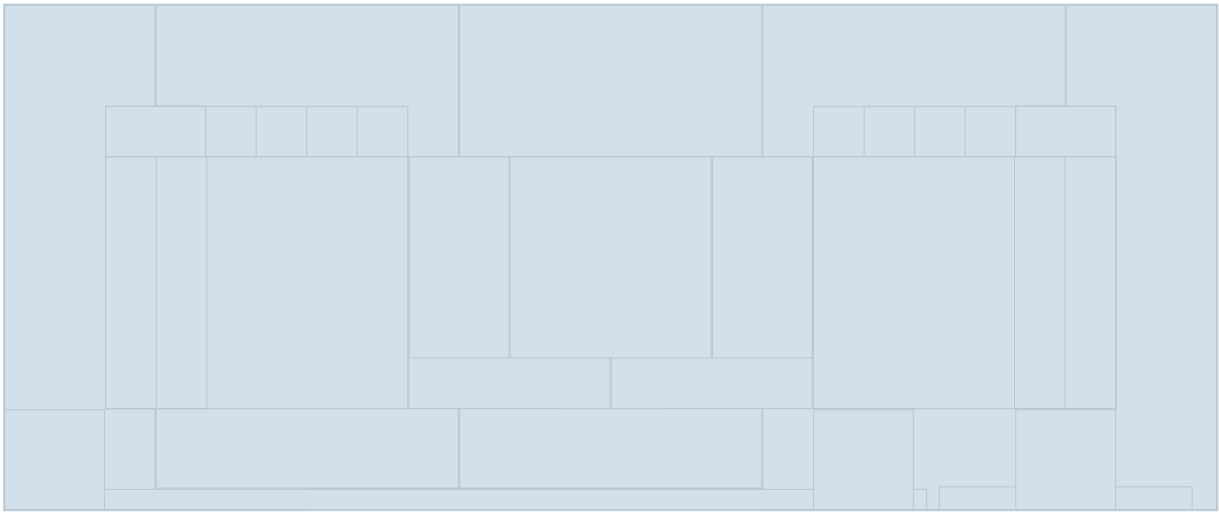


nominal 192 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)


BASE3-03x10-T-aa77a9

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT




SIDE




Kind: front_base
STL: BASE3-03x10-T-aa77a9.stl
STL units: mm / scale 100%
Grid: 3 x 10 @ 8.00
Body height: 9.60
Stud: dia 4.80 x 1.80 high
Tip lead-in: 0.25 high / radial
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80
Front row reserved (no stud/socket)
NP3 dovetail side allowance: 0.20
See front-interface.svg for sections

TOP / PRINT ORIENTATION




BOTTOM / REAL CAVITIES




BASE3-03x10-T-d79875

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT




SIDE




Kind: front_base
STL: BASE3-03x10-T-d79875.stl
STL units: mm / scale 100%
Grid: 3 x 10 @ 8.00
Body height: 9.60
Stud: dia 4.80 x 1.80 high
Tip lead-in: 0.25 high / radial
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80
Front row reserved (no stud/socket)
NP3 dovetail side allowance: 0.20
See front-interface.svg for sections

TOP / PRINT ORIENTATION




BOTTOM / REAL CAVITIES




BASE3-06x10-T-3f87ac

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT




SIDE



TOP / PRINT ORIENTATION

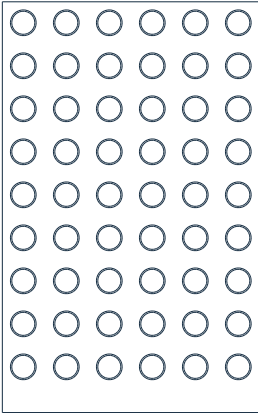

BOTTOM / REAL CAVITIES

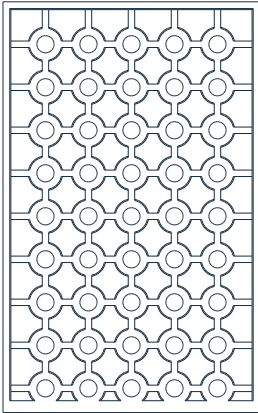

Kind: front_base

STL: BASE3-06x10-T-3f87ac.stl

STL units: mm / scale 100%

Grid: 6 x 10 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46

Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

Front row reserved (no stud/socket)


NP3 dovetail side allowance: 0.20

See front-interface.svg for sections


BASE3-06x10-T-6159e6

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT




SIDE



TOP / PRINT ORIENTATION

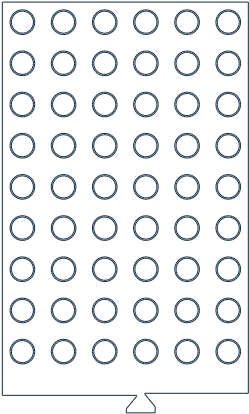

BOTTOM / REAL CAVITIES

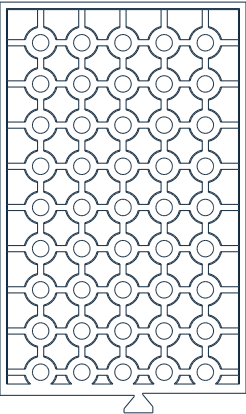

Kind: front_base

STL: BASE3-06x10-T-6159e6.stl

STL units: mm / scale 100%

Grid: 6 x 10 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46

Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

Front row reserved (no stud/socket)


NP3 dovetail side allowance: 0.20

See front-interface.svg for sections


BASE3-06x10-T-6e100f

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT




SIDE



TOP / PRINT ORIENTATION

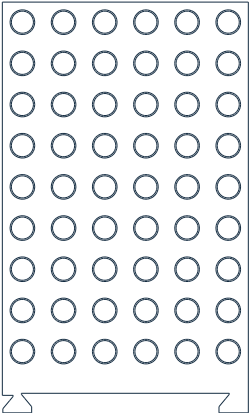

BOTTOM / REAL CAVITIES

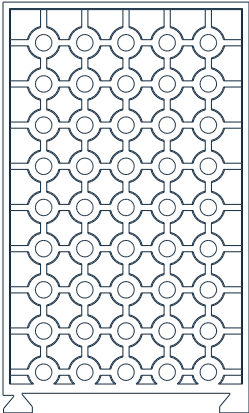

Kind: front_base

STL: BASE3-06x10-T-6e100f.stl

STL units: mm / scale 100%

Grid: 6 x 10 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46

Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

Front row reserved (no stud/socket)


NP3 dovetail side allowance: 0.20

See front-interface.svg for sections


BASE3-06x10-T-838259

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT




SIDE



TOP / PRINT ORIENTATION

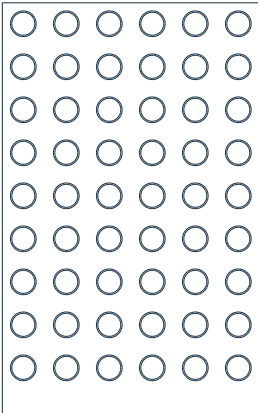

BOTTOM / REAL CAVITIES

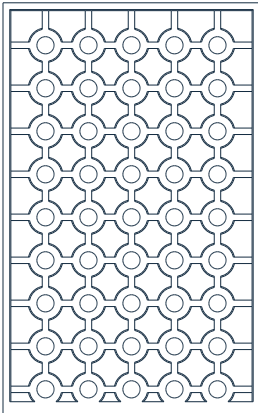

Kind: front_base

STL: BASE3-06x10-T-838259.stl

STL units: mm / scale 100%

Grid: 6 x 10 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46

Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

Front row reserved (no stud/socket)


NP3 dovetail side allowance: 0.20

See front-interface.svg for sections


BASE3-06x10-T-e1945a

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT




SIDE



TOP / PRINT ORIENTATION

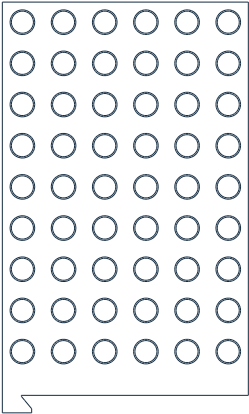

BOTTOM / REAL CAVITIES

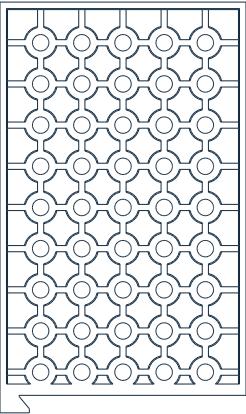

Kind: front_base

STL: BASE3-06x10-T-e1945a.stl

STL units: mm / scale 100%

Grid: 6 x 10 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46

Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

Front row reserved (no stud/socket)

NP3 dovetail side allowance: 0.20

See front-interface.svg for sections


BASE3-24x10-B-562406

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT



SIDE



Kind: front_base

STL: BASE3-24x10-B-562406.stl

STL units: mm / scale 100%

Grid: 24 x 10 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46

Tube bore: 3.20 (not accessory fit)


Roof ribs: 1.20; bridge gap <=6.80

Front row reserved (no stud/socket)


NP3 dovetail side allowance: 0.20

See front-interface.svg for sections

TOP / PRINT ORIENTATION

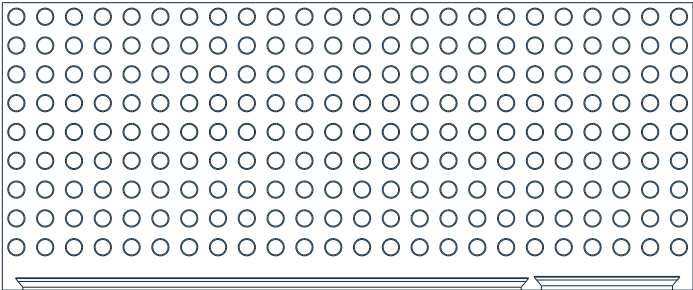


BOTTOM / REAL CAVITIES

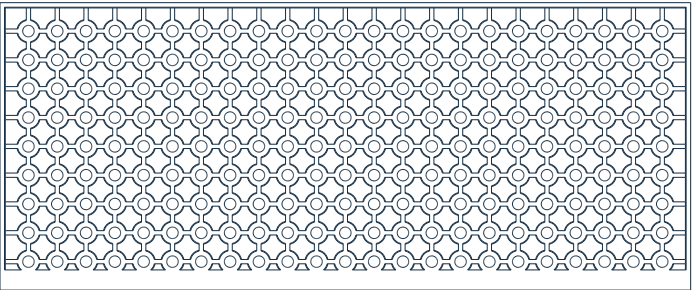


BR-01x04-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT



SIDE

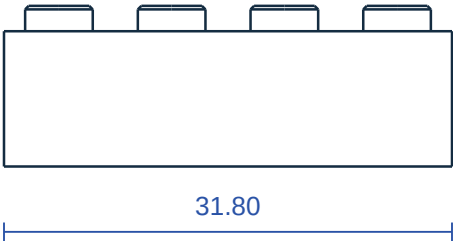

Kind: brick
STL: BR-01x04-H096.stl
STL units: mm / scale 100%
Grid: 1 x 4 @ 8.00
Body height: 9.60
Stud: dia 4.80 x 1.80 high
Tip lead-in: 0.25 high / radial
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80

TOP / PRINT ORIENTATION




BOTTOM / REAL CAVITIES




BR-02x04-H064

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT

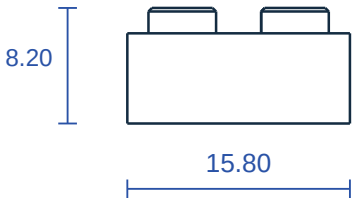


SIDE

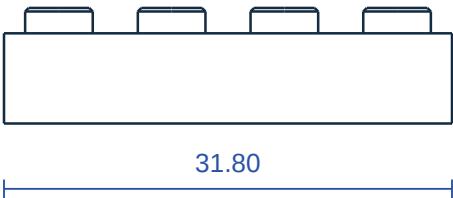

TOP / PRINT ORIENTATION

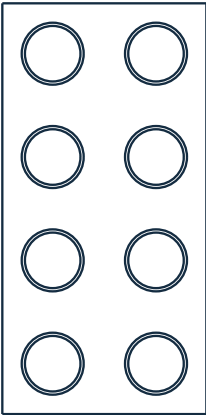

BOTTOM / REAL CAVITIES

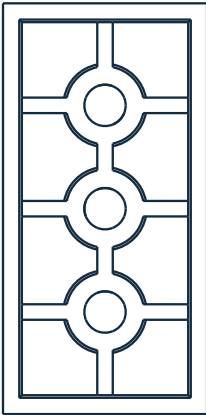


Kind: brick
STL: BR-02x04-H064.stl
STL units: mm / scale 100%
Grid: 2 x 4 @ 8.00
Body height: 6.40
Stud: dia 4.80 x 1.80 high
Tip lead-in: 0.25 high / radial
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80


BR-02x04-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT

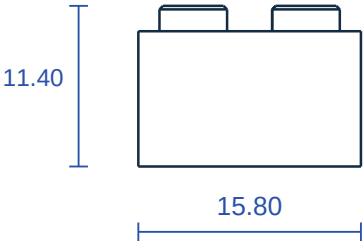


SIDE

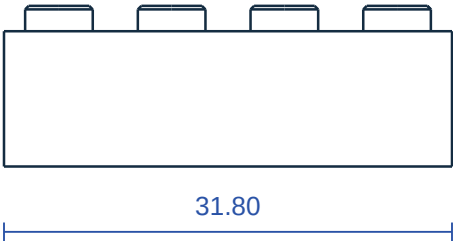

TOP / PRINT ORIENTATION

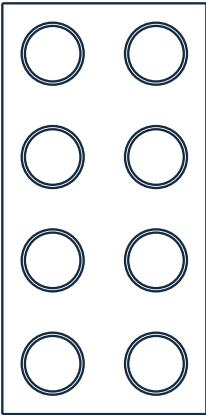

BOTTOM / REAL CAVITIES

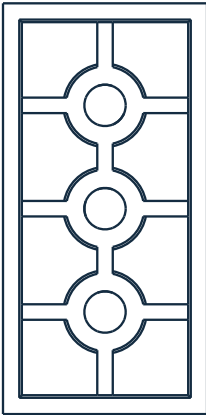


Kind: brick
STL: BR-02x04-H096.stl
STL units: mm / scale 100%
Grid: 2 x 4 @ 8.00
Body height: 9.60
Stud: dia 4.80 x 1.80 high
Tip lead-in: 0.25 high / radial
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80


BR-02x05-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT




SIDE

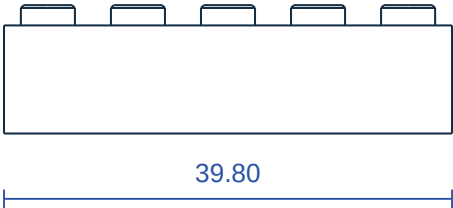

TOP / PRINT ORIENTATION



BOTTOM / REAL CAVITIES




Kind: brick
STL: BR-02x05-H096.stl
STL units: mm / scale 100%
Grid: 2 x 5 @ 8.00
Body height: 9.60
Stud: dia 4.80 x 1.80 high
Tip lead-in: 0.25 high / radial
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80

BR-02x06-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT



SIDE



Kind: brick

STL: BR-02x06-H096.stl

STL units: mm / scale 100%

Grid: 2 x 6 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial


Female radial c: +0.04

Outer wall: 1.46


Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

TOP / PRINT ORIENTATION




BOTTOM / REAL CAVITIES




BR-03x04-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT

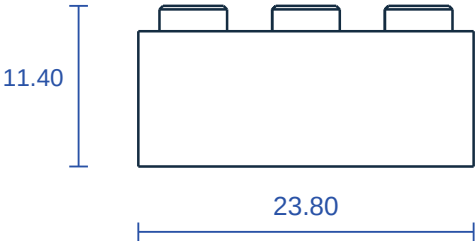


SIDE

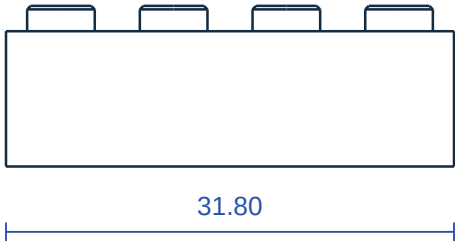

TOP / PRINT ORIENTATION

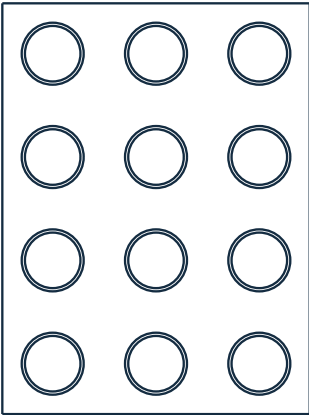

BOTTOM / REAL CAVITIES

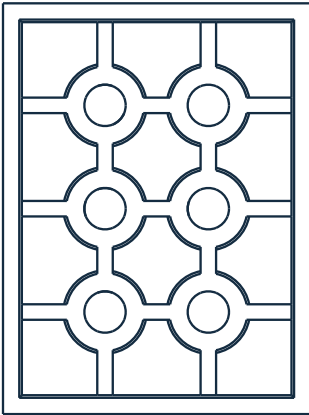

Kind: brick

STL: BR-03x04-H096.stl

STL units: mm / scale 100%

Grid: 3 x 4 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46


Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80


BR-04x04-H064

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT

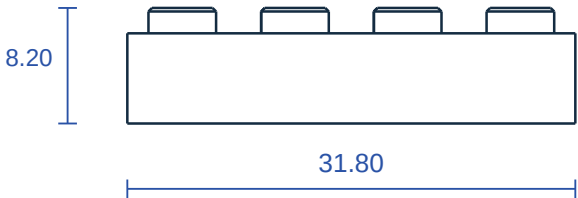


SIDE

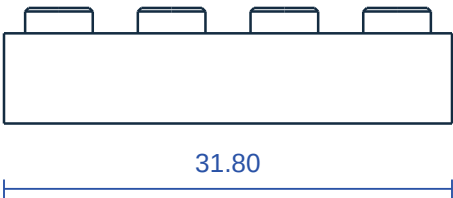

TOP / PRINT ORIENTATION

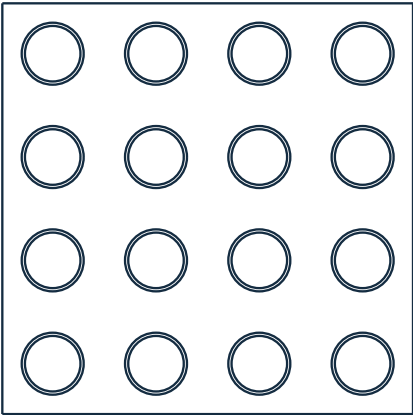

BOTTOM / REAL CAVITIES

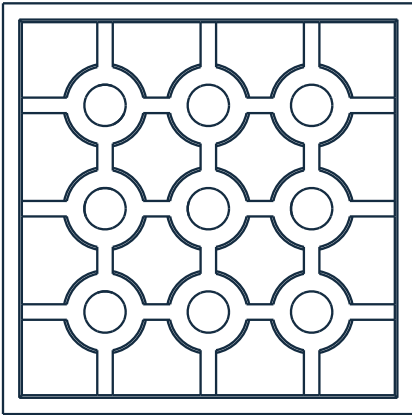

Kind: brick
STL: BR-04x04-H064.stl
STL units: mm / scale 100%
Grid: 4 x 4 @ 8.00
Body height: 6.40
Stud: dia 4.80 x 1.80 high
Tip lead-in: 0.25 high / radial
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80


BR-04x04-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT




SIDE

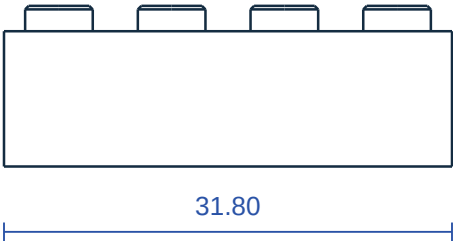

TOP / PRINT ORIENTATION

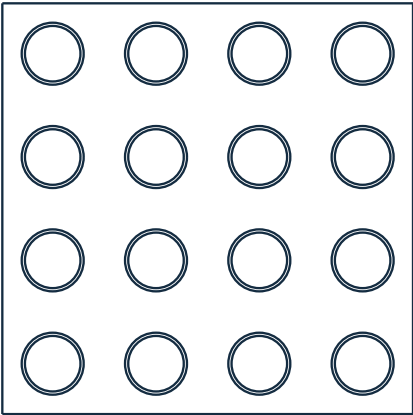

BOTTOM / REAL CAVITIES

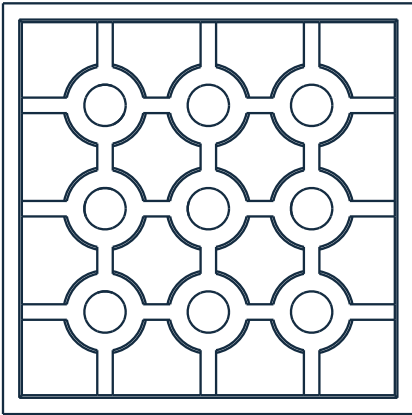


Kind: brick
STL: BR-04x04-H096.stl
STL units: mm / scale 100%
Grid: 4 x 4 @ 8.00
Body height: 9.60
Stud: dia 4.80 x 1.80 high
Tip lead-in: 0.25 high / radial
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80


BR-04x05-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT

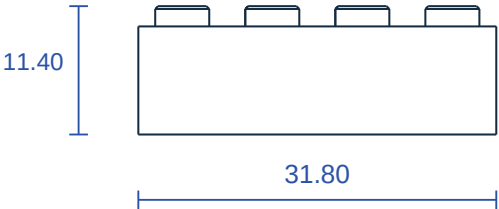


SIDE

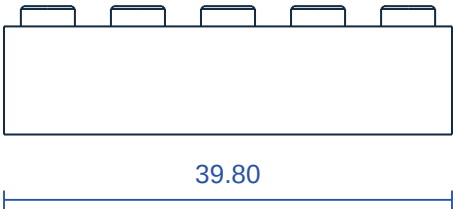

TOP / PRINT ORIENTATION

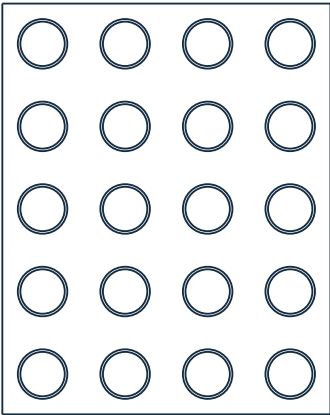

BOTTOM / REAL CAVITIES

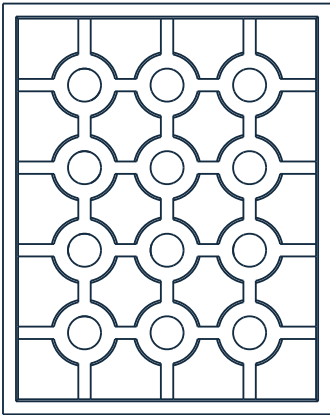


Kind: brick
STL: BR-04x05-H096.stl
STL units: mm / scale 100%
Grid: 4 x 5 @ 8.00
Body height: 9.60
Stud: dia 4.80 x 1.80 high
Tip lead-in: 0.25 high / radial
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80


BR-05x04-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT

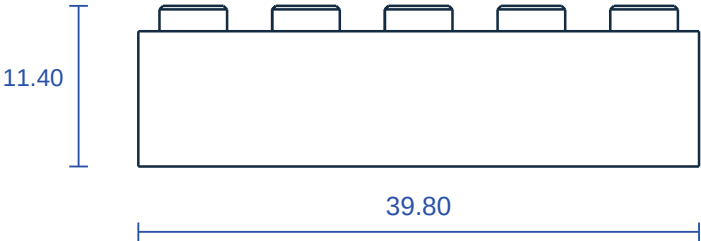


SIDE

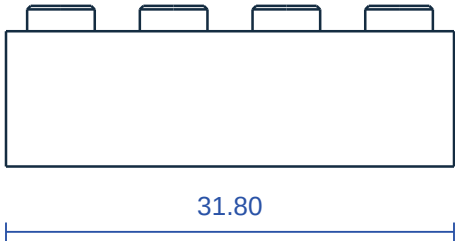

TOP / PRINT ORIENTATION

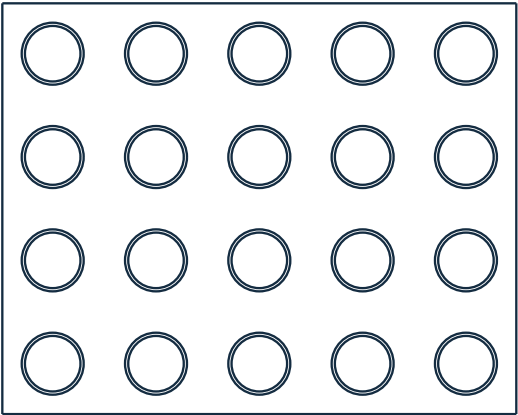

BOTTOM / REAL CAVITIES

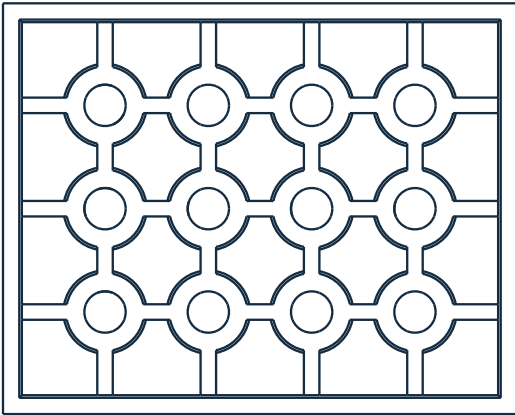


Kind: brick
STL: BR-05x04-H096.stl
STL units: mm / scale 100%
Grid: 5 x 4 @ 8.00
Body height: 9.60
Stud: dia 4.80 x 1.80 high
Tip lead-in: 0.25 high / radial
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80


NP3-KEEPER

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT




SIDE



TOP / PRINT ORIENTATION



BOTTOM / REAL CAVITIES




Kind: front_keeper
STL: NP3-KEEPER.stl
STL units: mm / scale 100%
Grid: 2 x 1 @ 8.00
Body height: 3.20
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80
Socket row at local Y=12.00
Flat front stop covers module top
Lift 6mm, then forward >=32mm and aside


NP3-LOGO-B

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT




SIDE




Kind: front_logo
STL: NP3-LOGO-B.stl
STL units: mm / scale 100%
Flat rear on bed / relief up
Carrier 2.40; side taper 2.00
Black to white after 2.80
White relief: 0.80; do not scale
Overall installed Z: 4.00 .. 44.00

TOP / PRINT ORIENTATION

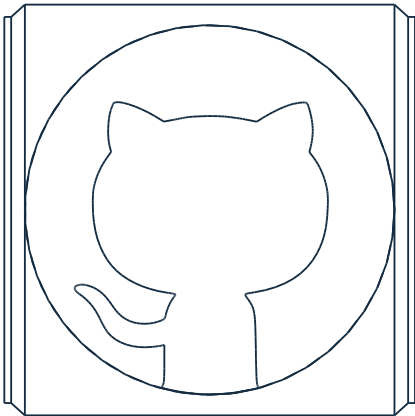


BOTTOM / REAL CAVITIES

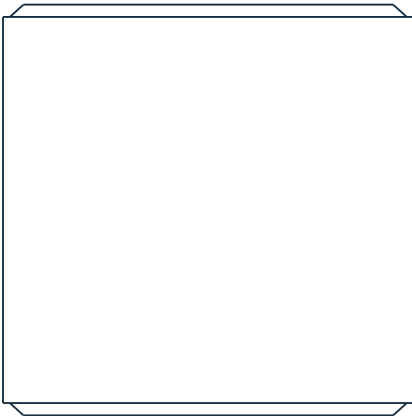

NP3-TEXT-B

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT



SIDE



Kind: front_plaque
STL: NP3-TEXT-B.stl
STL units: mm / scale 100%
Flat rear on bed / relief up
Carrier 2.40; side taper 2.00
Black to white after 2.40
White relief: 0.80; do not scale
Overall installed Z: 4.00 .. 44.00
Same icon, New adventures
github.com/YOUR-USERNAME

TOP / PRINT ORIENTATION



BOTTOM / REAL CAVITIES

