


INTERFACE / SECTION & CLEARANCE


Project design candidates, NOT a proprietary tolerance standard. Geometry from FreeCAD planar sections.

SECTION: Y = 4.00 / TWO 2x2 BRICKS

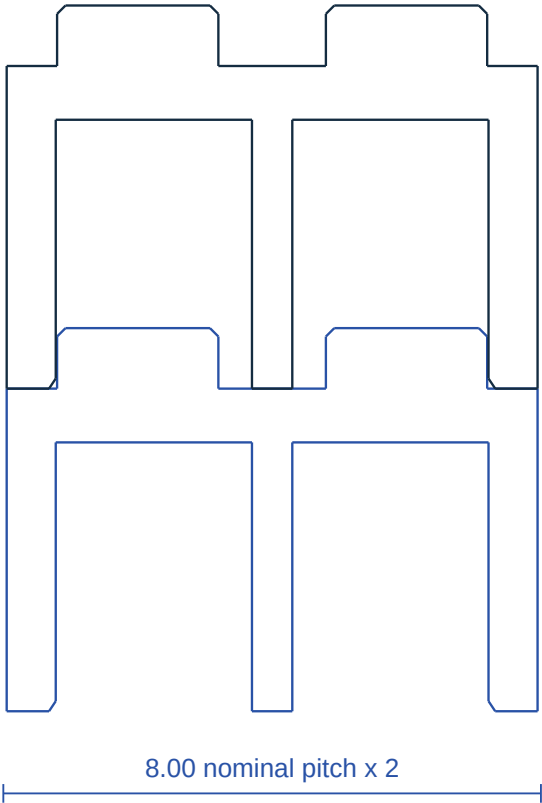

JOINT SECTION: Z = 10.50

Actual wall, tube, rib + mating stud outlines

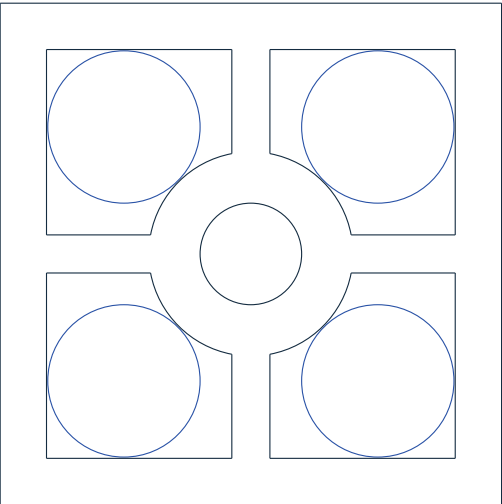

Blue: lower brick / black: upper socket

Reference stud dia 4.80; candidate height 1.80

Radial clearance $c=+0.04$ (default; untested)

Inside wall offset 1.56 / wall thickness 1.46

Tube OD 6.433708 / ID 3.20; grid rib 1.20

Tip lead-in 0.25 / female lead-in 0.20 x 0.30

Roof 1.60; thin plate roof 1.00


Thin plate / keeper: nominal headroom 0.40

No forced fit. Tune male and female separately.


NP3 / BASE-FRONT CAPTURE & REMOVAL

Actual BREP sections; precise dimensions apply to the nominal model, not guaranteed printed fit.

B / HORIZONTAL SECTION Z=24 / FRONT 8mm BAND

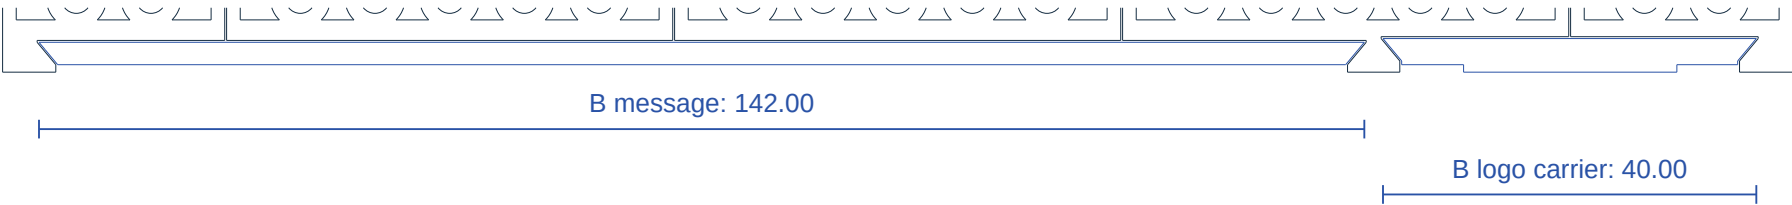

VERTICAL SECTION X=40

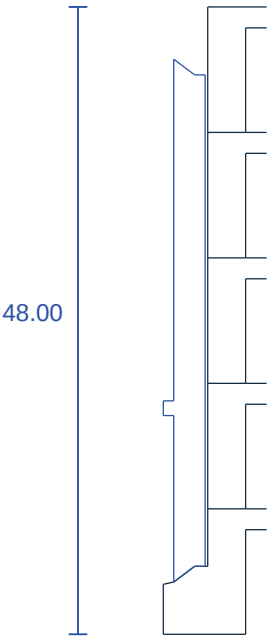

- Blue: installed modules; black: actual receiver / keepers
- Carrier thickness2.40 / rear flat0.80 / edge relief1.20
- Rear width -> front width: 2.00 inset on each X side
- Default side clearance0.20; coupon candidates0.15/0.20/0.25
- Text backY=3.30; logo backY=3.70; relief frontY=0.10
- Both front modules fit in Z=4.00..44.00, inside48mm base
- 3 separate up-stops: text2 / logo1; stud-grid mounting
- Remove: up-stops up6, forward>=32; module up45
- Thread / glue / magnet / purchased fastener not required
- Physical clutch, retention, flatness and stability NOT tested