

Not Finished, But Abandoned

by

Cameron T. Kuchta

A dissertation submitted in partial fulfillment of
the requirements for the degree of

Doctor of Philosophy

(Physics)

at the

UNIVERSITY OF WISCONSIN–MADISON

2026

Date of final oral examination: 01/01/2100

The dissertation is approved by the following members of the Final Oral Committee:

Jane Doeverything, Professor, Electrical Engineering

John Dosomethings, Associate Professor, Electrical Engineering

© Copyright by Cameron T. Kuchta 2026
All Rights Reserved

ACKNOWLEDGMENTS

It is customary for authors of academic books to include in their prefaces statements such as this: "I am indebted to ... for their invaluable help; however, any errors which remain are my sole responsibility." Occasionally an author will go further. Rather than say that if there are any mistakes then he is responsible for them, he will say that there will inevitably be some mistakes and he is responsible for them....

Although the shouldering of all responsibility is usually a social ritual, the admission that errors exist is not — it is often a sincere avowal of belief. But this appears to present a living and everyday example of a situation which philosophers have commonly dismissed as absurd; that it is sometimes rational to hold logically incompatible beliefs.

— DAVID C. MAKINSON (1965)

Above is the famous "preface paradox," which illustrates how to use the `wbepi` environment for epigraphs at the beginning of chapters. You probably also want to thank the Academy.

CONTENTS

Contents ii

List of Tables xviii

List of Figures xix

Abstract xxii

1 Introduction 1

1.1	<i>What the heck is a plasma</i>	1
1.1.1	Plasmas in the universe	1
1.1.2	How do plasmas affect us on earth?	1
1.1.3	Where does magnetic reconnection play into this whole shabang?	1
1.2	<i>Magnetic Reconnection</i>	1
1.2.1	The Generalized Ohm's Law	1
1.2.1.1	How do we derive this?	1
1.2.1.2	A breakdown of the terms	1
1.2.2	Regimes of Reconnection	1
1.2.2.1	Reconnection scaling parameters	1
1.2.2.2	Where do various systems line up?	2
1.2.2.3	What are we interested in?	2
1.2.3	Sweet-Parker Reconnection	2
1.2.3.1	A quick historical detour	2
1.2.3.2	What are the assumptions that go into Sweet-Parker?	2
1.2.3.3	Sweet-Parker Reconnection Rate Derivation	2
1.2.3.4	Application to Real Systems	2

1.2.3.4.1	What are some example parameters where reconnection occurs? .	2
1.2.3.4.2	What time scales does Sweet-Parker predict?	2
1.2.3.4.3	What did we miss?	2
1.2.4	Hall Reconnection	2
1.2.4.1	Why should the Hall term appear?	2
1.2.4.1.1	What is the relevant physics that sets when the hall term matters .	2
1.2.4.1.2	In what kind of plasmas does the hall term appear and when does it not?	2
1.2.4.2	What does hall reconnection look like . . .	3
1.2.4.3	What's missing?	3
1.2.5	Kinetic Reconnection	3
1.2.5.1	What makes kinetic reconnection "kinetic"? .	3
1.2.5.1.1	What do collisions do?	3
1.2.5.1.2	What makes a system kinetic? . .	3
1.2.5.2	Where does Pressure Anisotropy come from? .	3
1.2.5.2.1	Movement of flux tube	3
1.2.5.2.2	Effect of background field	3
1.2.5.3	How does pressure anisotropy change what the reconnection looks like	4
1.2.5.3.1	Thinner reconnection layer?	4
1.2.5.3.2	Marginal Firehose Condition . . .	4
1.2.5.3.3	Concluding: what features should we look for in the data?	4
1.2.5.4	Why do we want to measure it?	4
1.2.5.4.1	Simulation result overview	4
1.2.5.4.2	Spacecraft result overview	4

1.2.5.4.3	Experimental result?	4
1.3	<i>Experimental Setup</i> 5	
1.3.1	Overall how does our experiment progress	5
1.3.2	Initial field	6
1.3.2.1	Helmholtz	6
1.3.2.2	Permanent magnets	6
1.3.2.3	Toroidal	6
1.3.2.3.1	Shifted coil	6
1.3.2.3.2	Axial coil	6
1.3.2.4	Perturbation coils	6
1.3.3	Plasma Generation	6
1.3.3.1	How do our guns work	6
1.3.3.1.1	Gas lines	6
1.3.3.1.2	PFNs	6
1.3.3.1.3	Puff trigger	6
1.3.3.1.4	How to breakdown	6
1.3.3.2	How are the guns placed for injection? . .	6
1.3.3.2.1	How much do they fill the machine	6
1.3.3.2.2	What sets the filling fraction . . .	6
1.3.3.3	What goes wrong with them	7
1.3.3.3.1	Burning up	7
1.3.3.3.2	Burn holes in wall because of back- ground field	7
1.3.3.3.3	Air cooling	7
1.3.3.3.4	Optimizing gun operation	7
1.3.4	Drive field	7
1.3.4.1	Individual coils	7
1.3.4.1.1	Zone's between coils as plasma sources	7
1.3.4.2	Drive Cylinder	7
1.3.5	Diagnostics Overview	7

1.3.5.1	Bdot probes	7
1.3.5.1.1	Basic principles	7
1.3.5.1.2	Probe types	7
1.3.5.1.3	Data Interpretation	8
1.3.5.2	Hall probes	8
1.3.5.2.1	Basic principles	8
1.3.5.2.2	Issues and feasibility	8
1.3.5.3	Langmuir probes	8
1.3.5.3.1	Basic principles	8
1.3.5.3.2	What do we need to do to make them work for our device?	8
1.3.5.3.3	Look into XXX chapter	8
1.3.5.4	Fast camera	8
1.3.5.4.1	What can we see with it?	8
1.3.5.4.2	Potential use cases	8
1.3.6	How does the experiment compare to space	9
1.3.6.1	Simulation benefits and results	9
1.3.6.2	Space benefits and results	9
1.3.6.3	Lab benefits and results	9
1.3.7	Other lab reconnection experiments	9
1.3.7.1	VTF, MRX, FLARE	9
1.3.7.2	Exploding wire arrays	9
1.3.7.3	Laser based	9

2 Pressure Wave 10

2.1 Introduction 10

2.2 Observations that lead us to look at this wave 11

2.2.1	Speed probe measurements	11
2.2.1.1	Flux expansion before shock layer	11
2.2.1.2	Wavefront that depends on configuration	11
2.2.2	Simulations	11

2.2.2.1	Different n and drive change feature	11
2.2.2.2	Change reconnection layer post reflection .	11
2.3	<i>Physical understanding of wave</i>	11
2.3.1	Initial plasma configuration	11
2.3.2	Release in magnetic pressure	11
2.3.2.1	What would happen if plasma was immo- bile (replaced with perfect conductor) . .	11
2.3.3	Wavefront tells plasma about pressure Release . . .	11
2.3.3.1	Analogous system	11
2.3.4	Modeling magnetic field response	12
2.3.4.1	How do we create this model	12
2.3.4.2	Pressure wave is like a shield	12
2.3.4.3	Example	12
2.3.4.4	Why have we mentioned this?	12
2.3.4.4.1	Important for probe calibrations .	12
2.3.4.4.2	Good for predicting effects of dif- ferent coil configurations	12
2.4	<i>Wave Simulation</i>	12
2.4.1	Approximations	12
2.4.2	Linearizing MHD	12
2.4.3	Plasma Equilibrium + Symmetries	12
2.4.3.1	Types of Equilibrium	12
2.4.3.1.1	theta-pinch	12
2.4.3.1.2	screw-pinch	12
2.4.3.2	Types of Symmetries	12
2.4.3.2.1	z-symmetry	12
2.4.3.2.2	toroidal-symmetry	12
2.4.4	Simplified 1D equation	13
2.4.4.1	What does this look like?	13
2.4.4.2	Normalizations	13

2.4.4.3	Normalized equation	13
2.4.5	Boundary conditions	13
2.4.5.1	$r = 0$ Boundary	13
2.4.5.1.1	$v = 0$ option	13
2.4.5.1.2	$\xi = 0$ option	13
2.4.5.1.3	What do we choose?	13
2.4.5.2	$r = R$ Boundary	13
2.4.5.2.1	What is physically happening at high radius in the coils?	13
2.4.5.2.2	Loop voltage sets dB_z/dt	13
2.4.5.2.3	Assuming MHD so far so let's keep assuming!	13
2.4.5.2.4	Vloop signal shape	13
2.4.6	Initial conditions	14
2.4.6.1	What form can we expect plasma to take? .	14
2.4.6.2	What form do we use for these results . . .	14
2.4.7	What does our simulation show?	14
2.4.7.1	There is a wavefront traveling inwards at fast magnetosonic	14
2.4.7.1.1	Low beta approximation giving Alfven	14
2.4.7.2	Once wavefront passes, plasma moves out	14
2.4.7.3	Converting to B_{dot}	14
2.4.7.4	In B_{dot} we see flux moving outwards . . .	14
2.5	<i>How do we apply it to real data?</i>	14
2.5.1	Base requirements	14
2.5.1.1	Cylindrical symmetry	14
2.5.1.2	Releasing magnetic pressure at high radius	14
2.5.1.3	Measurements along a radial chord	14
2.5.1.4	Known initial field	14

2.5.2	Extracting the wave speed from the data	14
2.5.2.1	Wave tracking	14
2.5.2.1.1	Edge finding	14
2.5.2.1.2	Inertia	15
2.5.2.1.3	Monte-carlo	15
2.5.2.1.4	Centered finite difference	15
2.5.2.1.5	Mean + Standard Deviation of Speed	15
2.5.3	Getting the density	15
2.5.3.1	Using the alfven speed	15
2.5.4	Minimum measurable density	15
2.5.4.1	Assuming sample resolution	15
2.5.4.1.1	What does this assumption derive	15
2.5.4.1.2	How does it compare to the data .	15
2.5.4.1.3	We need a better approximation .	15
2.5.4.2	Assuming sub-sample resolution	16
2.5.4.3	A more complex model assuming the plasma is a step function * linear	16
2.6	<i>Does it reproduce langmuir probe results</i>	16
2.6.1	Experimental setup	16
2.6.1.1	Drive cylinder	16
2.6.1.2	Te probe along equator	16
2.6.2	Results	16
2.6.2.1	Langmuir probe minimum measurable den- sity	16
2.6.2.2	Impacts of simple Langmuir model vs BRL	16
2.6.2.3	What happens to the wave shape in simu- lation vs. experiment	16
2.6.2.3.1	Two-fluid dispersion	16
2.6.2.3.2	How might we expect this to change the wave	16

2.6.2.3.3	How to simulate evolution approximately	17
2.6.2.3.4	Dispersion simulation results . . .	17
2.7	<i>Applications</i>	17
2.7.1	Other machines where this is applicable	17
2.7.2	Diagnosing gun failures	18
2.7.3	Measuring effect of different gun number and Helmholtz strength	18
2.7.3.1	Gun number	18
2.7.3.2	Helmholtz	18
2.7.4	Measuring diffusion coefficient	18
2.7.4.1	Diffusion theoretical model	18
2.7.4.2	Diffusion simulations	18
2.7.4.3	Applications of pressure wave model . . .	18
2.8	<i>Future Research</i>	19
2.8.1	Better wave tracking	19
2.8.1.1	Cross-correlation	19
2.8.1.2	Dynamic Time Warping	19
2.8.1.3	Using a model of what the wave looks like	19
2.8.2	Using fast-magnetosonic speed instead of alfvén . .	19
2.8.2.1	Will this iteratively converge?	19
3	Multi-tip Langmuir Probe	20
3.1	<i>What's a Langmuir probe</i>	20
3.1.1	Basic Construction	20
3.1.2	Extracting Plasma Parameters	21
3.1.3	Plasma Perturbation	21
3.1.3.1	Unmagnetized Perturbation	21
3.1.3.2	Magnetic Field Effects	22
3.1.3.3	Perturbations in our System	22
3.1.3.3.1	Geometric Considerations	22

3.1.3.3.2	Magnetic Field Considerations . .	22
3.2	<i>Hardware</i> 23	
3.2.1	Physical Constraints	23
3.2.2	Shaft Components	24
3.2.2.1	Garages	24
3.2.2.2	Shaft materials	24
3.2.2.3	Centering Collet	25
3.2.2.4	Feed-thru	25
3.2.3	Tip Components	26
3.2.3.1	Probe body	26
3.2.3.2	Tip material + size	27
3.2.3.2.1	Why use Mo	27
3.2.3.2.2	Size considerations	27
3.2.3.3	Tip Shielding	28
3.2.3.3.1	Why shield at all?	28
3.2.3.3.2	First order mach effects to avoid .	28
3.2.4	B-dot Coils	29
3.2.4.1	Size Considerations	29
3.2.4.2	Noise Reduction	30
3.2.5	Length Scales	30
3.3	<i>Circuitry</i> 31	
3.3.1	Bias Source	31
3.3.1.1	Manually Controlled	32
3.3.1.1.1	Principles of operation	32
3.3.1.1.2	The good, the bad, and the ugly .	32
3.3.1.2	Remote Controlled	34
3.3.1.2.1	Principles of operation	34
3.3.1.2.2	Problems	35
3.3.1.2.3	Calibration	36
3.3.2	Probe Circuit	37

3.3.2.1	Principles of operation	38
3.3.2.2	Single-ended measurement	38
3.3.2.3	Differential measurement	40
3.3.2.4	Circuit Solution	40
3.3.2.4.1	How do we solve this	42
3.3.2.4.2	Assumptions	43
3.3.2.5	Calibration	43
3.3.2.5.1	Calibrating in Ion Saturation Regime	44
3.3.2.5.2	Calibrating on the exponential . .	44
3.3.2.5.3	Bayesian calibration	44
3.3.2.5.4	Calibration using pressure wave .	44
3.3.3	Bdot coils	45
3.3.3.1	In-shaft circuit	45
3.3.3.2	Circuit model	46
3.3.3.3	Calibration	46
3.3.3.4	Signal Interpretation	46
3.4	<i>Plasma Theory</i> 47	
3.4.1	Simple Plasma Theory (Hutchinson)	48
3.4.1.1	Derivation	48
3.4.1.2	Pros & Cons	49
3.4.2	BRL	50
3.4.3	Effect of electric fields	54
3.4.3.1	Where does the electric field come from . .	55
3.4.3.1.1	Inductive Fields	55
3.4.3.1.2	Static Fields	56
3.4.3.2	What does it do to the tip measurements .	57
3.4.3.2.1	Theoretical understanding	57
3.4.3.2.2	Physical reality	57
3.4.4	Minimum measurable density	58
3.4.4.1	What's the Debye Length	58

3.4.4.2	Sheath scale	59
3.4.4.3	Tip-tip sheath overlap	59
3.5	<i>Curve Fitting</i> 60	
3.5.1	Least squares Fitting	60
3.5.1.1	Benefits	60
3.5.1.2	Issues	60
3.5.2	ODR	61
3.5.2.1	What does error look like in our signals . .	61
3.5.2.2	How does ODR take that into account . . .	61
3.5.2.3	How to apply parameter bounds	62
3.5.2.3.1	Why apply bounds	62
3.5.2.3.2	Our method	62
3.5.3	Monte-carlo Fitting	63
3.5.3.1	Global vs. local minima	63
3.5.3.2	A simple solution	64
3.5.3.3	How do we sample initial conditions . . .	64
3.5.3.4	Choosing the best answer	64
3.5.3.5	More robust methods for getting global minimums	64
3.5.4	Combining multiple shots	65
3.5.4.1	Using some time points from each shot . .	65
3.5.4.2	Combining all IV points and fitting that . .	65
3.6	<i>Results</i> 66	
3.6.1	Measurement of low densities	66
3.6.1.1	How does Hutchinson vs BRL treat ion sat- uration	66
3.6.1.2	What are the experimental predictions that Hutchinson vs BRL have	66
3.6.1.3	How does that change the results	66
3.6.2	Noise resilience	66

3.6.3	Fits more accurate	66
3.6.4	Extracting electric fields	67
3.6.4.1	Where do we expect electric fields to be . .	67
3.6.4.2	Do we see them there	67
4	Pressure Anisotropy Probe	68
4.1	<i>How can we measure Pressure Anisotropy</i>	68
4.1.1	Thomson Scattering	68
4.1.1.1	Pros	68
4.1.1.2	Cons	68
4.1.2	Directional Langmuir Probe	68
4.1.2.1	Pros	68
4.1.2.2	Cons	68
4.2	<i>Hardware</i>	69
4.2.1	Shaft Components	69
4.2.1.1	Garages	69
4.2.1.2	Shaft materials	69
4.2.1.3	Centering Collet	69
4.2.1.4	Feed-thru	69
4.2.2	Tip Components	69
4.2.2.1	Probe body	69
4.2.2.1.1	3D printed	69
4.2.2.1.2	Both sides fit together	69
4.2.2.2	Tip material + size	69
4.2.2.2.1	Shell material	69
4.2.2.2.2	Core material	69
4.2.2.3	Tip Shielding	70
4.2.2.3.1	Shell Shielding	70
4.2.2.3.2	Core Shielding	70
4.2.3	Bdot Coils	70
4.2.4	Connecting Bdot - Probe - Shaft	70

4.2.5	Length Scales	70
4.3	<i>Circuitry</i> 70	
4.3.1	Bias Source	70
4.3.1.1	Principles of operation	70
4.3.1.1.1	Charging	70
4.3.1.1.2	Discharging	70
4.3.1.1.3	Swapping polarity	70
4.3.1.2	How do we do this	70
4.3.1.2.1	Cannibalization	70
4.3.1.2.2	Discharging	71
4.3.1.2.3	Safety	71
4.3.1.2.4	Cap arcing	71
4.3.1.2.5	Reducing voltage drop due to inductance	71
4.3.1.2.6	Reversing polarity	71
4.3.1.2.7	LabView (ew)	71
4.3.1.3	Calibration	72
4.3.1.3.1	Calibrating power supply output	72
4.3.1.3.2	Calibrating cap bank output . . .	72
4.3.2	Probe Circuit	72
4.3.2.1	Single-ended measurement	72
4.3.2.1.1	TREX cells	72
4.3.2.1.2	Why was this bad	72
4.3.2.1.3	How long did we spend on this :(	72
4.3.2.2	Differential measurement	72
4.3.2.2.1	Parallel circuitry	72
4.3.2.3	Figuring out grounds	72
4.3.2.3.1	Types of grounds on the ACQ . .	72
4.3.2.3.2	Routing grounds	72
4.3.2.4	Swapping current paths	73

4.3.2.4.1	Why do we want to do this	73
4.3.2.4.2	Circuitry to do this	73
4.3.2.4.3	How does this change results . . .	73
4.3.2.5	Circuit Solution	73
4.3.2.5.1	Solution	73
4.3.2.5.2	Assumptions	73
4.3.2.6	Calibration	73
4.3.2.6.1	Calibrating in isat	73
4.3.2.6.2	Calibrating on the exponential . .	74
4.3.2.6.3	Rotation calibration	74
4.3.2.7	The path to ground	74
4.3.2.7.1	Why do we have to care	74
4.3.2.7.2	How do we set it	74
4.3.2.8	Capacitive coupling	74
4.3.2.8.1	Where does it come from	74
4.3.2.8.2	Where do we see it	74
4.3.2.8.3	Magnitude of effect	74
4.3.2.8.4	Removing effect	74
4.4	<i>Plasma Theory</i> 75	
4.4.1	A full model	75
4.4.1.1	Plasma Distribution	75
4.4.1.2	Ion particle flux	75
4.4.1.2.1	Mach effects	75
4.4.1.3	Electron particle flux	75
4.4.1.3.1	Minimum velocity	75
4.4.1.3.2	Area	75
4.4.1.3.3	Particle Flux	75
4.4.1.4	Theoretical JV curves	75
4.4.1.4.1	Reading radar plots	75
4.4.2	Individual tip fitting	75

4.4.2.1	Why do this instead	75
4.4.2.2	Methods	75
4.4.2.2.1	Aforementioned methods	75
4.4.2.2.2	Exponential	76
4.4.2.3	Extracting plasma parameters	76
4.4.2.3.1	Spherical harmonics	76
4.4.2.3.2	Error bars	76
4.5	<i>Curve Fitting</i> 76	
4.5.1	Combining multiple shots	77
4.5.1.1	Timing alignment	77
4.5.1.1.1	Bz = 0 alignment	77
4.5.1.1.2	Bdot cross correlation	77
4.5.1.1.3	Result comparison	77
4.5.1.2	Averaging of core data	77
4.5.1.2.1	Weighted average of relay on/off	77
4.5.2	Fitting shell	78
4.5.2.1	Use all shell data	78
4.5.2.2	Fit using BRL	78
4.5.2.3	Fits pretty good	78
4.5.3	Fitting core	78
4.5.3.1	Fitting using full routine	78
4.5.3.1.1	Slow	78
4.5.3.1.2	Model not perfectly representative	78
4.5.3.2	Fitting tips independently	78
4.5.3.2.1	Individual fitting method	78
4.5.3.2.2	Holding Vprobe constant	78
4.5.3.2.3	Exponential fitting method	78
4.5.3.2.4	Spherical harmonics	78
4.6	<i>Results</i> 78	
4.6.1	Drive cylinder	79

4.6.1.1	What did we try	79
4.6.1.2	Why didn't we see pressure anisotropy . .	79
4.6.1.2.1	In the bdot data	79
4.6.1.2.2	In the PA data	79
4.6.2	3 coil	79
4.6.2.1	How much anisotropy should we expect .	79
4.6.2.2	What setups did we try	79
4.6.2.3	Old results of just comparing radar plots .	79
4.6.2.4	New results using independent fitting . . .	79
5	Conclusion	80
5.1	<i>Summary of thesis</i>	80
5.1.1	Using pressure waves to measure density	80
5.1.2	Upgrading langmuir probe analysis and new possibilities	80
5.1.3	Using directional langmuir probes for measuring pressure anisotropy	80
5.2	<i>Future work</i>	80
5.2.1	Pressure wave	80
5.2.1.1	Aforementioned future work	80
5.2.1.2	Extracting cross-field diffusion	80
5.2.2	Langmuir Probe	80
5.2.2.1	Prepared to analyze lots of cool data	80
5.2.2.2	Extract out electric field	80
5.2.3	PA Probe	80
5.2.3.1	Try more configurations	80
5.2.3.2	Map out full pressure anisotropy during shot	80
	Colophon	81
	References	82

LIST OF TABLES

1.1	List of diagnostics used in the experiment and what they can measure.	7
1.2	Lab vs. Space Parameters	9
2.1	Parameters for normalization	13
3.1	*Multitip Langmuir Probe Length Scales	31
3.2	*Multitip Bias Circuit Component Values	37
3.3	Probe circuit component values	40
3.4	Chen BRL Parametrization	55
4.1	Length scales of probe	70
4.2	Bias circuit component values	72
4.3	Probe circuit component values	72

LIST OF FIGURES

1.1	Cartoon of places where reconnection can happen.	1
1.2	Diagram of reconnection regimes.	1
1.3	Diagram of Sweet-Parker reconnection.	2
1.4	Diagram of 2d hall reconnection	3
1.5	Flux tube changing size during reconnection causing pressure anisotropy build up.	3
1.6	Simulated kinetic reconnection with changing guide field. . .	4
1.7	Diagram from Ohia of with and without pressure anisotropy in simulation.	4
1.8	Some figure from Jan's papers thowing effects of pressure anisotropy	4
1.9	*Experimental Sequence Timeline	5
1.10	Panels from flux arrays of experiment happening.	5
1.11	Circuit diagram of plasma gun.	6
1.12	Simplified cut of plasma gun insides.	6
1.13	Image from high speed camera of gun spewing	7
2.1	dBz/dt plots for different Helmholtz fields	10
2.2	Greess et al. 2022 paper showing simulations with pressure wave.	10
2.3	Simple diagram of sound wave in container	12
2.4	Data vs. crude minimum density vs. empirical minimum density	15
2.5	Diagram of what the more complex model looks like.	15
2.6	CAD rendering of BRB w/ drive cylinder, flux probes, and Te probe.	16
2.7	Plot of langmuir density and wave density	16
2.8	Diagram of sheath overlap for multitip langmuir probe	16
2.9	Plot of two-fluid dispresion relation	16

2.10	Results of simulating application of dispresion relation to pres- sure wave	17
2.11	Initial density before and after many shots	17
2.12	Initial density for varying gun number	17
2.13	Initial density for varying Helmholtz	17
2.14	Diagram of flux mechanisms.	18
2.15	Example diffusion simulation	18
2.16	Example of cross-correlation	18
2.17	Example of DTW	19
3.1	*Diagram of simple langmuir probe	20
3.2	*Probe Shaft CAD Diagram	24
3.3	*Picture of multi-tip Langmuir Probe	26
3.4	*Multi-tip Langmuir Probe Body Schematic	27
3.5	*Mach Effect Diagram	29
3.6	*Old Multitip Biasing Circuit	33
3.7	*New Multitip Biasing Circuit	35
3.8	*New Multitip Bias Circuitry Image	36
3.9	*Tip Signal Circuit	38
3.10	*Tip Circuit w/ Noise	39
3.11	Multitip Single Ended Tip Board	41
3.12	Image of new circuit board	42
3.13	*Bdot coil circuit	45
3.14	Multitip Electric Field Diagram	57
3.15	Multitip Electric Field Effect	58
3.16	Multitip Fit Example	63
3.17	Example fit using many shots, multiple local parameter fits, and errors	66
3.18	Plot of isat currents from BRL	66
3.19	Radial chord of initial density with Hutchinson vs BRL.	66
3.20	Comparison of expected E from Ohm's law and measured E.	67

4.1	Picture of feed thru along with drawings of cross-sections. . .	69
4.2	Picture of end of probe	69
4.3	CAD diagram of full body	69
4.4	CAD diagram of probe tip	69
4.5	Simple circuit diagram of how bias works.	70
4.6	Full circuit diagram of how bias works.	71
4.7	Image of power supply setup	71
4.8	Schematic of grounding diagram	72
4.9	Image of swapping box	73
4.10	Diagram of swapping	73
4.11	Time frame for core movie of IV with separation between relay	73
4.12	Circuit diagram of probe circuitry	74
4.13	Image of probe circuitry	74
4.14	Probe signals showing coupling	74
4.15	Figure of theoretial plasma distributions and JV curves	75
4.16	Simple drawing of what might happen to ions	76
4.17	Comparison of alignment using $B_z = 0$ or $\mathbf{b} \cdot \mathbf{d}$ cross correlation	77

ABSTRACT

FIXME: basically a placeholder; do not believe

I did some research, read a bunch of papers, published a couple myself, (pick one):

1. ran some experiments and made some graphs,
2. proved some theorems

and now I have a job. I've assembled this document in the last couple of months so you will let me leave. Thanks!

1 INTRODUCTION

1.1 What the heck is a plasma

1.1.1 Plasmas in the universe

1.1.2 How do plasmas affect us on earth?

1.1.3 Where does magnetic reconnection play into this whole shabang?

1.2 Magnetic Reconnection

1.2.1 The Generalized Ohm's Law

1.2.1.1 How do we derive this?

1.2.1.2 A breakdown of the terms

1.2.2 Regimes of Reconnection

1.2.2.1 Reconnection scaling parameters

i.e. why do we use S and L/d_i to characterize reconnection regimes?

Figure 1.1: Cartoon of places where reconnection can happen.

Figure 1.2: Diagram of reconnection regimes.

Figure 1.3: Diagram of Sweet-Parker reconnection.

1.2.2.2 Where do various systems line up?

1.2.2.3 What are we interested in?

1.2.3 Sweet-Parker Reconnection

1.2.3.1 A quick historical detour

1.2.3.2 What are the assumptions that go into Sweet-Parker?

1.2.3.3 Sweet-Parker Reconnection Rate Derivation

1.2.3.4 Application to Real Systems

1.2.3.4.1 What are some example parameters where reconnection occurs?

1.2.3.4.2 What time scales does Sweet-Parker predict?

1.2.3.4.3 What did we miss?

1.2.4 Hall Reconnection

1.2.4.1 Why should the Hall term appear?

1.2.4.1.1 What is the relevant physics that sets when the hall term matters

1.2.4.1.2 In what kind of plasmas does the hall term appear and when does it not?

Figure 1.4: Diagram of 2d hall reconnection

Figure 1.5: Flux tube changing size during reconnection causing pressure anisotropy build up.

1.2.4.2 What does hall reconnection look like

1.2.4.3 What's missing?

1.2.5 Kinetic Reconnection

1.2.5.1 What makes kinetic reconnection “kinetic”?

1.2.5.1.1 What do collisions do?

1.2.5.1.1.1 How quickly do collisions damp out non-Maxwellian features?

1.2.5.1.2 What makes a system kinetic?

1.2.5.1.2.1 What parameters set this?

1.2.5.1.2.2 What should we do in the lab to get this?

1.2.5.2 Where does Pressure Anisotropy come from?

Trapping electric field: Egedal et al. (2009)

1.2.5.2.1 Movement of flux tube

1.2.5.2.2 Effect of background field

1.2.5.2.2.1 Too low of background field does...

Figure 1.6: Simulated kinetic reconnection with changing guide field.

Figure 1.7: Diagram from Ohia of with and without pressure anisotropy in simulation.

Figure 1.8: Some figure from Jan's papers thowing effects of pressure anisotropy

1.2.5.2.2.2 Too high of field does...

1.2.5.2.2.3 Goldilocks!

1.2.5.3 How does pressure anisotropy change what the reconnection looks like

1.2.5.3.1 Thinner reconnection layer? Use results from Jan's more recent papers.

1.2.5.3.2 Marginal Firehose Condition

1.2.5.3.3 Concluding: what features should we look for in the data?

1.2.5.4 Why do we want to measure it?

At the end of experimental setup I'll talk about why we want to do it in the lab but I think motivating why we care about kinetic reconnection as a process would be good here.

1.2.5.4.1 Simulation result overview

1.2.5.4.2 Spacecraft result overview

1.2.5.4.3 Experimental result?

1.3 Experimental Setup

1.3.1 Overall how does our experiment progress

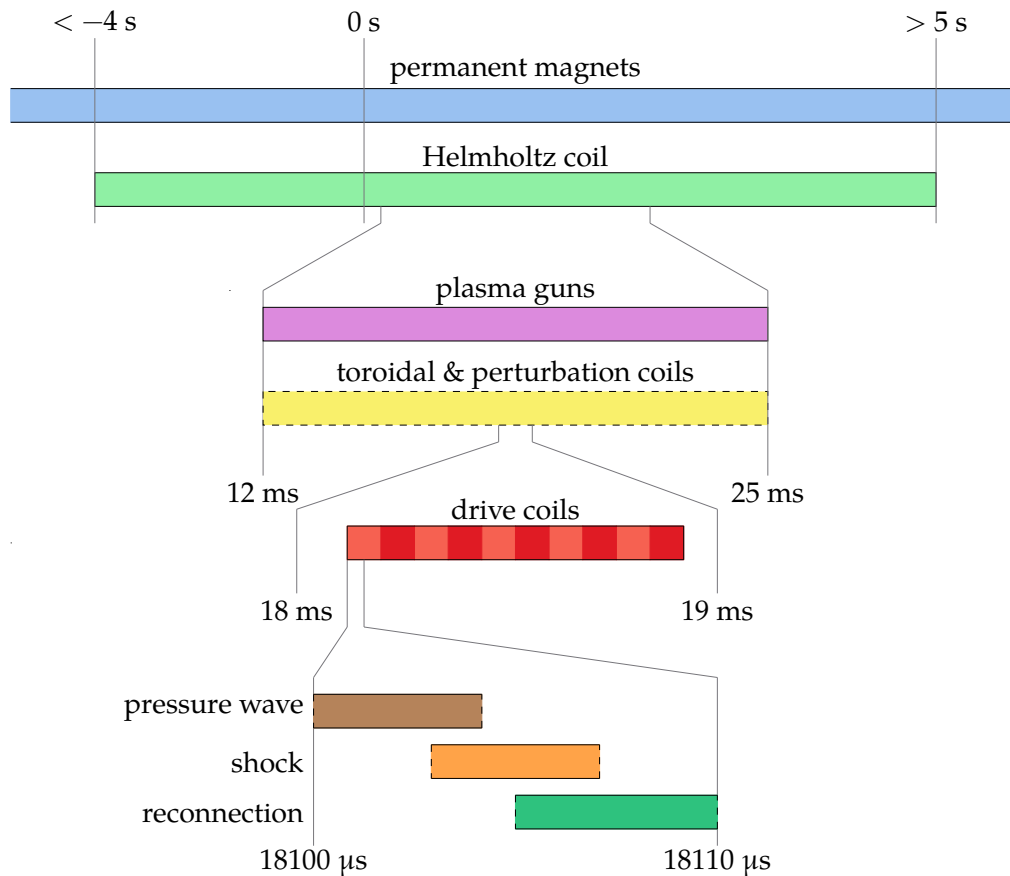


Figure 1.9: Timeline of experimental sequence.

Figure 1.10: Panels from flux arrays of experiment happening.

Figure 1.11: Circuit diagram of plasma gun.

Figure 1.12: Simplified cut of plasma gun insides.

1.3.2 Initial field

1.3.2.1 Helmholtz

1.3.2.2 Permanent magnets

1.3.2.3 Toroidal

1.3.2.3.1 Shifted coil

1.3.2.3.2 Axial coil

1.3.2.4 Perturbation coils

1.3.3 Plasma Generation

1.3.3.1 How do our guns work

1.3.3.1.1 Gas lines

1.3.3.1.2 PFNs

1.3.3.1.3 Puff trigger

1.3.3.1.4 How to breakdown

1.3.3.2 How are the guns placed for injection?

1.3.3.2.1 How much do they fill the machine

1.3.3.2.2 What sets the filling fraction

Figure 1.13: Image from high speed camera of gun spewing

Table 1.1: List of diagnostics used in the experiment and what they can measure.

1.3.3.3 What goes wrong with them

1.3.3.3.1 Burning up

1.3.3.3.2 Burn holes in wall because of background field Get image from Paul with hole in wall.

1.3.3.3.3 Air cooling

1.3.3.3.4 Optimizing gun operation

1.3.4 Drive field

1.3.4.1 Individual coils

1.3.4.1.1 Zone's between coils as plasma sources

1.3.4.2 Drive Cylinder

Reference Paul's RSI + thesis.

1.3.5 Diagnostics Overview

1.3.5.1 Bdot probes

1.3.5.1.1 Basic principles

1.3.5.1.2 Probe types

1.3.5.1.2.1 Linear probe

1.3.5.1.2.2 Hook probe

1.3.5.1.2.3 Speed probe

1.3.5.1.2.4 Flux array 1

1.3.5.1.2.5 Flux array 2

1.3.5.1.3 Data Interpretation How do we convert the raw data into something useful?

1.3.5.2 Hall probes

1.3.5.2.1 Basic principles

1.3.5.2.2 Issues and feasibility

1.3.5.3 Langmuir probes

1.3.5.3.1 Basic principles

1.3.5.3.2 What do we need to do to make them work for our device?

1.3.5.3.3 Look into XXX chapter

1.3.5.4 Fast camera

1.3.5.4.1 What can we see with it?

1.3.5.4.2 Potential use cases

Table 1.2: Comparison of lab and space parameters.

1.3.6 How does the experiment compare to space

1.3.6.1 Simulation benefits and results

1.3.6.2 Space benefits and results

1.3.6.3 Lab benefits and results

1.3.7 Other lab reconnection experiments

1.3.7.1 VTF, MRX, FLARE

1.3.7.2 Exploding wire arrays

1.3.7.3 Laser based

2 PRESSURE WAVE

2.1 Introduction

Once I get Jan's rewrite of the intro + conclusion I can figure out what might go here.

Figure 2.1: dBz/dt plots for different Helmholtz fields

Figure 2.2: Greess et al. 2022 paper showing simulations with pressure wave.

2.2 Observations that lead us to look at this wave

2.2.1 Speed probe measurements

2.2.1.1 Flux expansion before shock layer

2.2.1.2 Wavefront that depends on configuration

2.2.2 Simulations

2.2.2.1 Different n and drive change feature

2.2.2.2 Change reconnection layer post reflection

2.3 Physical understanding of wave

2.3.1 Initial plasma configuration

2.3.2 Release in magnetic pressure

2.3.2.1 What would happen if plasma was immobile (replaced with perfect conductor)

All field is shielded at edge and there is no change in magnetic pressure in the bulk.

2.3.3 Wavefront tells plasma about pressure Release

2.3.3.1 Analogous system

Sound wave.

How does a sound wave propagate in a plasma? Fast magnetosonic wave!

Figure 2.3: Simple diagram of sound wave in container

2.3.4 Modeling magnetic field response

2.3.4.1 How do we create this model

2.3.4.2 Pressure wave is like a shield

2.3.4.3 Example

2.3.4.4 Why have we mentioned this?

2.3.4.4.1 Important for probe calibrations

2.3.4.4.2 Good for predicting effects of different coil configurations

2.4 Wave Simulation

2.4.1 Approximations

2.4.2 Linearizing MHD

2.4.3 Plasma Equilibrium + Symmetries

2.4.3.1 Types of Equilibrium

2.4.3.1.1 theta-pinch

2.4.3.1.2 screw-pinch

2.4.3.2 Types of Symmetries

2.4.3.2.1 z-symmetry

2.4.3.2.2 toroidal-symmetry

Table 2.1: Parameters for normalization

2.4.4 Simplified 1D equation

2.4.4.1 What does this look like?

A wave equation!

2.4.4.2 Normalizations

2.4.4.3 Normalized equation

2.4.5 Boundary conditions

2.4.5.1 $r = 0$ Boundary

2.4.5.1.1 $v = 0$ option

2.4.5.1.2 $\xi = 0$ option

2.4.5.1.3 What do we choose?

2.4.5.2 $r = R$ Boundary

2.4.5.2.1 What is physically happening at high radius in the coils?

2.4.5.2.2 Loop voltage sets dB_z/dt

2.4.5.2.3 Assuming MHD so far so let's keep assuming!

2.4.5.2.4 Vloop signal shape

2.4.6 Initial conditions

2.4.6.1 What form can we expect plasma to take?

2.4.6.2 What form do we use for these results

2.4.7 What does our simulation show?

2.4.7.1 There is a wavefront traveling inwards at fast magnetosonic

2.4.7.1.1 Low beta approximation giving Alfven

2.4.7.2 Once wavefront passes, plasma moves out

2.4.7.3 Converting to $\mathbf{B} \cdot \mathbf{d}$

2.4.7.4 In $\mathbf{B} \cdot \mathbf{d}$ we see flux moving outwards

As expected from MHD assumption.

2.5 How do we apply it to real data?

2.5.1 Base requirements

2.5.1.1 Cylindrical symmetry

2.5.1.2 Releasing magnetic pressure at high radius

2.5.1.3 Measurements along a radial chord

2.5.1.4 Known initial field

2.5.2 Extracting the wave speed from the data

2.5.2.1 Wave tracking

2.5.2.1.1 Edge finding

Figure 2.4: Data vs. crude minimum density vs. empirical minimum density

Figure 2.5: Diagram of what the more complex model looks like.

2.5.2.1.2 Inertia

2.5.2.1.3 Monte-carlo

2.5.2.1.4 Centered finite difference

2.5.2.1.5 Mean + Standard Deviation of Speed

2.5.3 Getting the density

2.5.3.1 Using the alfven speed

2.5.4 Minimum measurable density

2.5.4.1 Assuming sample resolution

2.5.4.1.1 What does this assumption derive

2.5.4.1.2 How does it compare to the data

2.5.4.1.3 We need a better approximation

Figure 2.6: CAD rendering of BRB w/ drive cylinder, flux probes, and Te probe.

Figure 2.7: Plot of langmuir density and wave density

Figure 2.8: Diagram of sheath overlap for multitip langmuir probe

2.5.4.2 Assuming sub-sample resolution

**2.5.4.3 A more complex model assuming the plasma is a step function
* linear**

2.6 Does it reproduce langmuir probe results

2.6.1 Experimental setup

2.6.1.1 Drive cylinder

2.6.1.2 Te probe along equator

2.6.2 Results

2.6.2.1 Langmuir probe minimum measurable density

2.6.2.2 Impacts of simple Langmuir model vs BRL

Refer to figure in Te section showing how it matters.

2.6.2.3 What happens to the wave shape in simulation vs. experiment

2.6.2.3.1 Two-fluid dispersion

2.6.2.3.2 How might we expect this to change the wave

Figure 2.9: Plot of two-fluid dispersion relation

Figure 2.10: Results of simulating application of dispersion relation to pressure wave

Figure 2.11: Initial density before and after many shots

Figure 2.12: Initial density for varying gun number

2.6.2.3.3 How to simulate evolution approximately

2.6.2.3.4 Dispersion simulation results

2.7 Applications

2.7.1 Other machines where this is applicable

LAPD & MRX

Figure 2.13: Initial density for varying Helmholtz

Figure 2.14: Diagram of flux mechanisms.

Figure 2.15: Example diffusion simulation

Figure 2.16: Example of cross-correlation

2.7.2 Diagnosing gun failures

2.7.3 Measuring effect of different gun number and Helmholtz strength

2.7.3.1 Gun number

2.7.3.2 Helmholtz

2.7.4 Measuring diffusion coefficient

2.7.4.1 Diffusion theoretical model

2.7.4.2 Diffusion simulations

2.7.4.3 Applications of pressure wave model

I think I need to do a bit more research here to show that we can actually extract a diffusion coefficient.

Figure 2.17: Example of DTW

2.8 Future Research

2.8.1 Better wave tracking

2.8.1.1 Cross-correlation

2.8.1.2 Dynamic Time Warping

2.8.1.3 Using a model of what the wave looks like

2.8.2 Using fast-magnetosonic speed instead of alfven

2.8.2.1 Will this iteratively converge?

3 MULTI-TIP LANGMUIR PROBE

3.1 What's a Langmuir probe

Hershkowitz: Hershkowitz (1989) Hutchinson: Hutchinson (2002) Olson: Olson (2020)

Plasma diagnostics make a broad phylogenetic tree ranging from the variety of plasma parameters they can measure to their size and complexity. In the Big Red Ball we prefer simplicity and cheapness to some of the wilder diagnostic varieties so a common probe that we use is a Langmuir probe.

3.1.1 Basic Construction

These Langmuir probes are quite basic in construction. At it's simplest, a conductor is placed in contact with the plasma and a voltage is applied relative to ground which we will call the probe voltage, V_{probe} . This will locally perturb the plasma and collect a current, I_{probe} , which can be seen in figure 3.1. If $V_{\text{probe}} < V_{\text{plasma}}$, an electric field is formed that repels electrons and attracts ions and the inverse for $V_{\text{probe}} > V_{\text{plasma}}$.

Langmuir probes have been developed to work in a very wide range

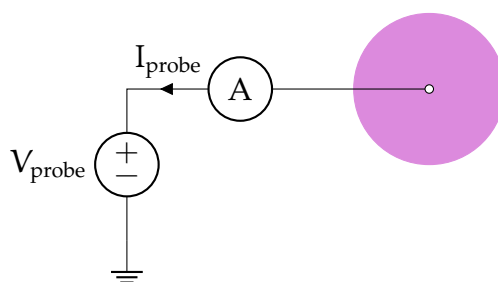


Figure 3.1: A circuit for a very simple Langmuir probe. The probe is biased to the probe voltage, V_{probe} , relative to ground by the power supply. The conductor (white circle) collects ions and electrons from the plasma (pink circle) causing a current to the probe, I_{probe} .

of plasma parameter configurations that well encompass the plasma parameters TREX achieves (see table 1.2).

3.1.2 Extracting Plasma Parameters

The most challenging part of these probes is the conversion of measured current to plasma parameters. Since we are trying to get a local measurement of the plasma parameters and we are also perturbing the plasma locally by touching it with a probe, we need to create a theory that correctly takes into account that perturbation such that we can get the plasma parameters. This often consists of a fitting procedure where the difference between the theoretical and experimental I-V curves is minimized.

Additionally, many a probe theory is purpose built for plasmas with no magnetic field. As we are studying magnetic reconnection in which there are in fact magnetic fields, this could change the I-V characteristic in unexpected ways. We'll discuss below why these effects are not very impactful and in future sections describe the theories we use for extracting the plasma parameters.

3.1.3 Plasma Perturbation

A problem often found in highly magnetized plasma devices is the long range perturbation to the plasma by the probe. In the Big Red Ball there are times where we have a relatively strong field and times when we don't so let's examine both cases.

3.1.3.1 Unmagnetized Perturbation

Let's examine this from an unmagnetized starting point. In this configuration, the probe collects nearly isotropically to an extent limited by the Debye length which creates a sheath around the probe and operates to shield the electric field caused by the difference between V_{probe} and V_{plasma} .

This length scale is very short and plasma can easily refill the sheath in this unmagnetized system.

3.1.3.2 Magnetic Field Effects

Now in a highly magnetized system (gyroradius far smaller than probe length scale) the plasma interacting with the probe comes from a flux tube approximately the size of the probe area projected into the magnetic field direction. Because of this, the probe can start “emptying out” the flux tube because of the difficulty of plasma to diffuse across field lines into the flux tube. This means the extend of the probe perturbation is far longer.

3.1.3.3 Perturbations in our System

We are quite lucky in that our system geometry reduces the impacts of flux tube emptying and the plasmas we are studying are often relatively unmagnetized.

3.1.3.3.1 Geometric Considerations The TREX experiment is (often) cylindrically symmetric and our probes are placed in different toroidal planes (see figure 2.6 for coordinate system reference). This means that without any toroidal field, any emptying only occurs in the plane of the probe which may still affect the probe I-V characteristic but is not affecting other probes measurements in a significant manner. When we do have a toroidal field, we also often have non-uniform B_r and B_z which means the flux tube passes through many different plasma parameters. This may help to average out any flux tube emptying because at different points along the flux tube more plasma may be able to enter the tube than just what is expected at the probe causing a reduced perturbation length.

3.1.3.3.2 Magnetic Field Considerations As we have magnetic fields in our system, we do need to worry about these flux tube effects. Fortunately,

our magnetic field are relatively small and in the region we are often most interested in (where reconnection is occurring) the magnetic field is far smaller than the initial background field. We characterize this smallness by the ratio of the gyroradius to the radius of the probe area which is on the order of ??? (see 3.1).

3.2 Hardware

There has been a long and storied history of probe building on the Big Red Ball especially for the development of multi-tip Langmuir probes. For some more information about our probes, see Olson (2020).

3.2.1 Physical Constraints

Our Langmuir probes need to satisfy a number of requirements.

- **Length:** The probe is attached to a port on the surface of the machine. This means it starts at a spherical radius of 1.5 m and must be inserted from there. Thus the insertable length should be fairly long and must be stable. This is described in 3.2.2.
- **Material:** We want our probe to survive the plasma exposure and not affect our vacuum pressure via offgassing. We also don't want to have to worry about secondary electron emission. We discuss this in 3.2.3.
- **Probe Size:** We want to measure the plasma locally so our probe body needs to be small relative to the plasma gradients. It also needs to be able to fit through ball joints that can be mounted to the machine that have a radius of ???. These considerations are taken into account in 3.2.3.

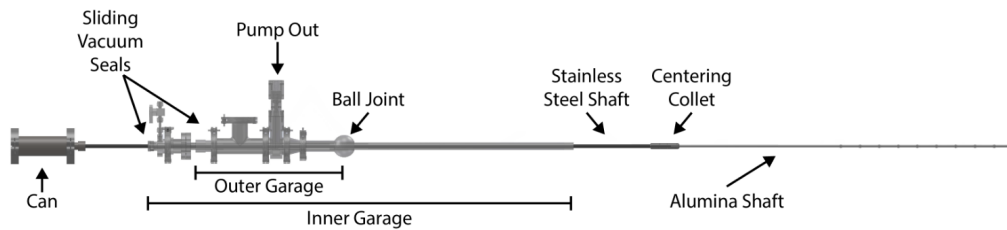


Figure 3.2: Three stage probe shaft with an outer and inner garage and the main stainless steel shaft that connects to the probe.

3.2.2 Shaft Components

For our probe to reach everywhere we want and also actually be in the position we desire we need a long shaft with a sufficient amount of support to be accurate to a few centimeters. Why a few centimeters? Our plasma dynamics are reproducible but not to such an extreme that a centimeter is noticeably different. Also it's difficult with the probe length to achieve too much better.

3.2.2.1 Garages

As can be seen in figure 3.2, the probe shaft is a multistage system. Each stage consists of some tubing where connections between different stages are made using quick-connect high-vacuum fittings (like part 3486N32 from McMaster-Carr).

We mount the probe to the machine using a flange on the outer garage or a ball joint (as seen in the figure). Then we can move each garage independently to insert the probe a desired length.

3.2.2.2 Shaft materials

We need to sufficiently support our probe and the shafts themselves so we use stainless steel until we enter the plasma region in which we change to alumina.

For the shafts, stainless steel is vacuum safe, tolerant to plasma interaction, and can support the weight of the structure easily without excessive flexing. Unfortunately, as a conductor, it will act as a long Langmuir probe that will create a ray in the machine at a single potential. This will perturb the plasma much more significantly than using an insulator.

To that end we use alumina, a high temperature ceramic whose surface will accumulate charge such that it'll be left at the floating potential (the potential at which the ion and electron currents balance). This helps to perturb the plasma less as there is no net current to the shaft and thus the plasma should (hopefully) be less perturbed.

Right near the end of the probe shaft, we use stainless steel tubing to connect from the alumina to the probe body. This is to reduce the overall size of the shaft in perturbing the plasma at the probe and is only for 10 cm of length.

3.2.2.3 Centering Collet

Each shaft/garage, is held in place by the sliding vacuum seal that connects it to its larger garage. Unfortunately this gives only a single point of contact for making the shafts concentric. This would cause excessive drooping of the probe and may be so bad as to cause the probe to hit the edge of the machine when being inserted/removed.

To fix this issue, we have used centering collets that allow the inner shaft/garage to move while being held in place by the outer garage. These can be both machined or 3D printed. When 3D printed we can make these to also hold the o-rings so they are double-acting.

3.2.2.4 Feed-thru

We need some way to extract the signals from the probe tip. Because of the construction of our probe and for simplicity purposes, the probe shaft is at vacuum pressure. Thus we attach a feed-thru to the end of the can

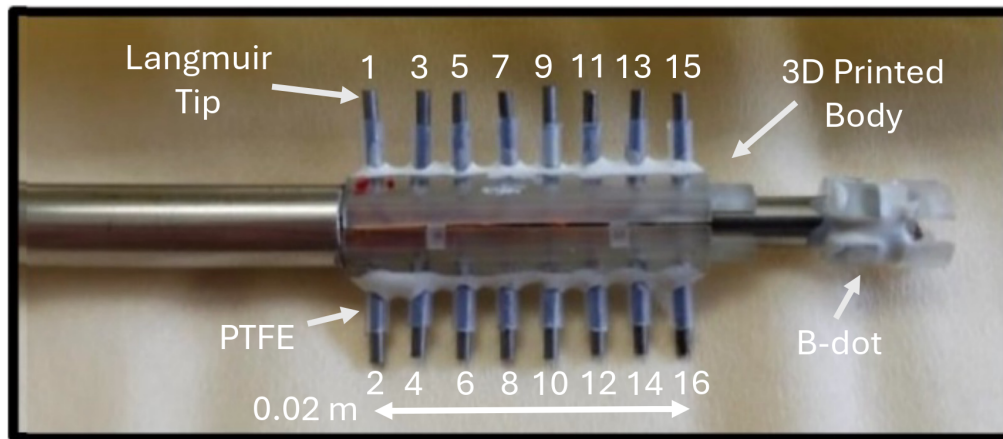


Figure 3.3: Picture of the end of the multi-tip Langmuir probe. Image from Gradney (2025).

from figure 3.2. This is constructed using two DB-25 hermetically sealed connectors where we solder the wires directly to the vacuum side of the can and then can easily move and connect the probe externally.

3.2.3 Tip Components

3.2.3.1 Probe body

Our probe does not need to withstand extreme heat fluxes and our vacuum conditions don't need to be perfect so we are lucky enough to be able to use a 3D printed probe body.

This is constructed using stereolithography which gives a sufficient resolution for the probe. Additionally the plastic used holds up well in vacuum. The body must connect to two different diameter stainless steel tubes (as can be seen in figure 3.3). Thus we use two annuli whose inner/outer radii match the tubing.

The tubing exists to connect the probe to the main shaft holding it up and also a small B-dot coil which is discussed in 3.2.4.

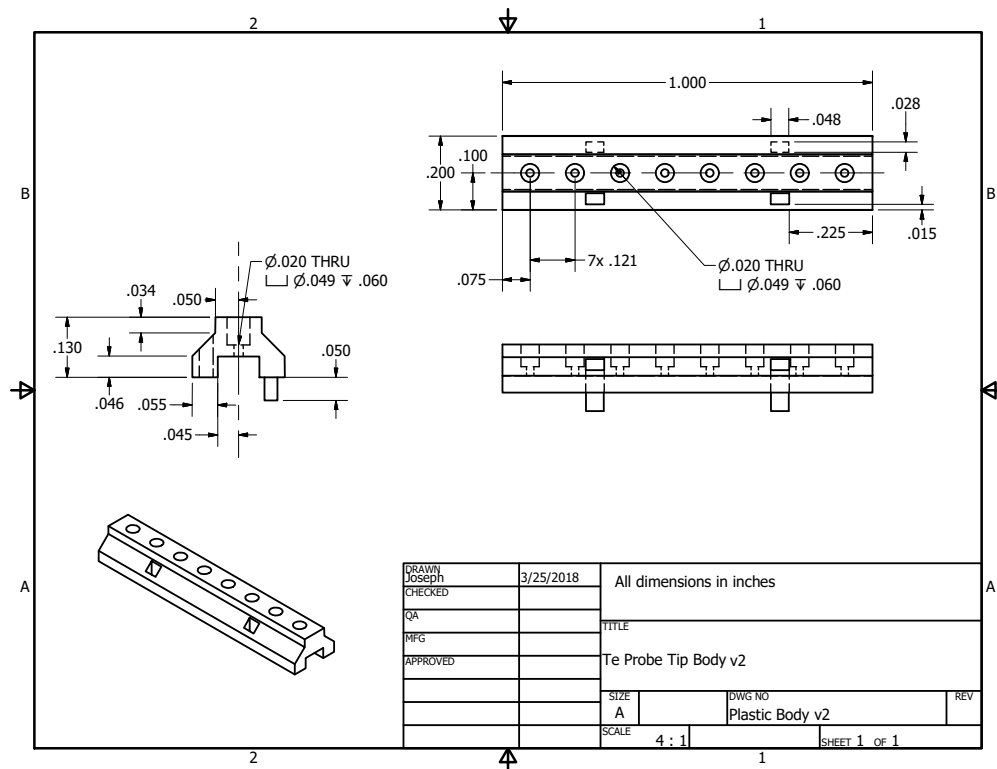


Figure 3.4: Probe body from engineering sketch. Created by Joe Olson.

3.2.3.2 Tip material + size

To collect current, we use 16 separate tips which each sample a point on the IV curve. We make these tips out of Molybdenum which requires us to connect the tips to the signal wire using a friction fit.

3.2.3.2.1 Why use Mo Even though Molybdenum has it's difficulties with connections, it has a high work function which helps to reduce secondary electron emission which can change the shape of the IV-characteristic.

3.2.3.2.2 Size considerations We expect the current to the tips to be on the order of 1 kA/m². We measure the current across a 'sense' resistor

(as discussed thoroughly in 3.3.2) but we don't want to have to use high power resistors for this. Thus we choose our current to be on the order of 10 mA which is feasible by having a tip area on the order of 10 mm². This amount of current also gives a reasonable signal-to-noise ratio.

Unfortunately, the probe is not all that cylindrical which means that the idealized probe theories we use are not as precise as we may have hoped. Future probe designs could use longer and smaller diameter tips to avoid this issue.

3.2.3.3 Tip Shielding

We protect each tip from the base of the probe body using PTFE/teflon. Teflon isn't great in a vacuum environment because of offgassing but does the trick and is cheap and easy to use. After inserting the tip into the probe body we push the teflon on and apply a small amount of vacuum-safe epoxy at the base to hold the shielding in place.

3.2.3.3.1 Why shield at all? We could potentially shorten each tip so the collecting area extends all the way to the probe body. Unfortunately because of the increased size of the body this can cause shadowing effects where tips on one side of the probe have a different IV-characteristic than those on the other. This 'shadowing' is caused by plasma flow parallel to the tip direction which gets intercepted by the probe body.

3.2.3.3.2 First order mach effects to avoid Another reason to shield the probe is to avoid mach effects that would cause different IV-characteristics for tips on opposite sides. As can be seen in figure 3.5, in an ideal mach probe the ions are prevented from easily accessing the "shadowed" side of the probe (right side) because of their inertia. If we shrink the probe body and increase the distance the tip is from the probe the mach effect is reduced because ion inertia is not sufficient to prevent collection. This is

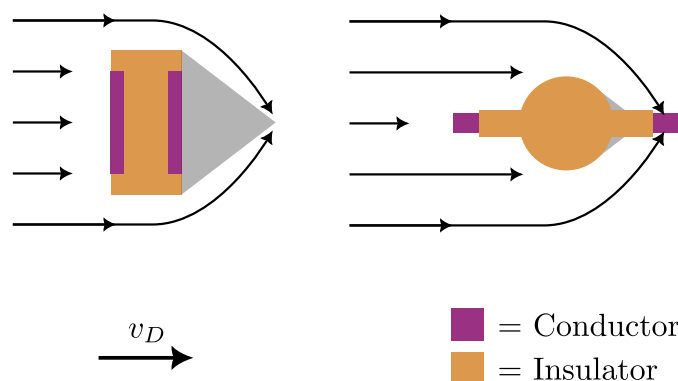


Figure 3.5: Simplified cartoon of the expected Mach effect for the multitip probe. The black arrows in the top figures are the approximate paths ions take due to the electric fields around the probe. The grey shaded region is where the ion density is significantly diminished. The left probe is a classic Mach probe geometry and the right probe is the multitip probe whose geometry is purpose built to avoid this Mach effect. Figure inspired by Merlino and D'Angelo (1987), Fig. 10.

only approximate though and we sometimes do see effects that could be caused by shadowing. For an in depth discussion of mach probes we refer the interested reader to Chung (2012).

3.2.4 B-dot Coils

Since we don't know the exact location of the probe and the plasma is not perfectly reproducible, it's especially useful to have measurements we can compare to other diagnostics to locate the probe in space and around the reconnection region. To do this we use hand wound three axis Bdot coils that can measure the change in magnetic field near the tips.

3.2.4.1 Size Considerations

Through past trial and error and many a day spent hand winding coils for past students, we've found a reasonable vector area magnitude to use for the B-dot coils. During reconnection the largest $\partial_t \mathbf{B}$ is on the order of 10

kT/s. Thus, from Faraday's law,

$$\mathcal{E} = \mathbf{A} \cdot \partial_t \mathbf{B} \quad (3.1)$$

where $\mathcal{E}$ is the electromotive force and $\mathbf{A}$ is the vector area of the coil Jackson (1999). This means that for a signal of 1 V we are looking for a cross-sectional area of 10^{-4} m^2 .

Using a 3D-printed B-dot body (seen in right in figure 3.3) we wrap wire around a square shaped center six times giving an area of $\sim 5 \times 10^{-5} \text{ m}^2$. Although smaller than that required for a 1 V measurement, this makes sure the signal doesn't become too large should some kind of resonance exist in the circuit.

3.2.4.2 Noise Reduction

Since common mode noise can relatively easily couple to the coils, we use twisted pair for each wrapping direction. This gives us two circuits that have nearly opposite vector area, $\mathbf{A}_1 \approx -\mathbf{A}_2$, such that we can subtract the two measurements and thus remove common mode contributions. We will discuss this more in 3.3.3.4.

3.2.5 Length Scales

Table 3.1 contains all information that helps us decide on our Langmuir probe theory and signal interpretation. There are a few key features to note that let us validate the use of finite area B-dot coils and multiple tips.

Our ion and electron gyroradii are both relatively large compared to the probe tips and B-dot coils. This means that if we assume the plasma is relatively uniform in a flux tube, the entire probe is sampling a quite uniform plasma.

Name	Symbol	Equation	Value
Tip radius	r	—	5e-4
Tip length	l	—	2e-3
Neighboring tip separation	—	—	2e-3
Across probe tip separation	—	—	1.5e-2
B-dot coil side length	—	—	3e-3
Debye length	λ_D	$\sqrt{\frac{\epsilon_0 T_e}{ne}}$	3e-5
Ion Gyroradius	r_i	$\frac{m_i \sqrt{2m_i \bar{v}_i}}{eB}$	6e-1
Electron Gyroradius	r_e	$\frac{m_e \sqrt{2m_e \bar{v}_e}}{eB}$	1.5e-1
Ion mean free path	λ_i	$\frac{v_i}{\nu_{i,i}}$	9e-4
Electron mean free path	λ_e	$\frac{v_e}{\nu_{e,e}}$	4.5
Electron energy relaxation length	λ_ε	* Eq. 5	4.5
Sheath thickness	h	$\sim \lambda_D$	3e-5

Table 3.1: Length scales of the multitip probe. All lengths are in meters and are approximate. For the interested reader and for the energy relaxation length, please refer to Demidov et al. (2002) for Langmuir probe relevant physics of these scales. These parameters were calculated with $n = 10^{18} \text{ m}^{-3}$, $T_e = 20 \text{ eV}$, $T_i = 0.1 \times T_e$, and $B = 10^{-4} \text{ T}$. For the mean free paths we have chosen the frequency that gives the shortest length.

3.3 Circuitry

The multitip Langmuir probe consists of a number of circuits that work together to give us some nice measurements. Here we enumerate their operation methods, upgrades, signal extraction, and calibration techniques.

3.3.1 Bias Source

We have thus far had two different circuits that we've used for biasing each tip relative to the laboratory ground. The first, made by Jan Egedal while at VTF is manually controlled, while the second, made by me is remotely operated. We'll discuss how they work and their pros and cons.

3.3.1.1 Manually Controlled

Our previous setup consisted of multiple electrolytic capacitors whose voltage is set by a series of resistors that split the voltage between the negative power supply (V_-), ground, and the positive power supply (V_+).

3.3.1.1.1 Principles of operation Figure 3.6 shows a 4 tip biasing circuit (our circuit uses 16 tips but we have simplified it). The ‘rails’ (which are the maximum and minimum voltage of the circuit) are set by power sources at V_+ and V_- which are biased relative to the ground input connection labeled Jgnd. A series of resistors splits the voltage between the rails and we choose one of the tips to be at laboratory ground. This lets us set the maximum and minimum voltage along with setting how many tips are positively/negatively biased. Also, moving the ground changes the voltage separation between tips so we can get higher resolution. The voltage separation charges the respective capacitors for each tip to a bias voltage, $V_b = V_{bi}$. The capacitors exist to keep the bias voltage of each tip nearly constant during an experimental shot.

Now let’s calculate the bias for each tip. Let $i, j \in \{1, \dots, N\}$ be the index of the tip and the index of the ground connection respectively. Then,

$$V_{bi} = \begin{cases} \frac{V_+}{j}(j - i) & \text{if } j \geq i \\ \frac{V_-}{N+1-j}(i - j) & \text{if } j < i \end{cases} \quad (3.2)$$

where V_{bi} is the bias voltage for tip i .

3.3.1.1.2 The good, the bad, and the ugly Because of the simplicity of this system, it has proven to work relatively well since it’s been built. Unfortunately since most of its components are free-standing and the wired connections undergo some movement during travel and assembly, various solder joints are prone to breaking. Additionally because of the

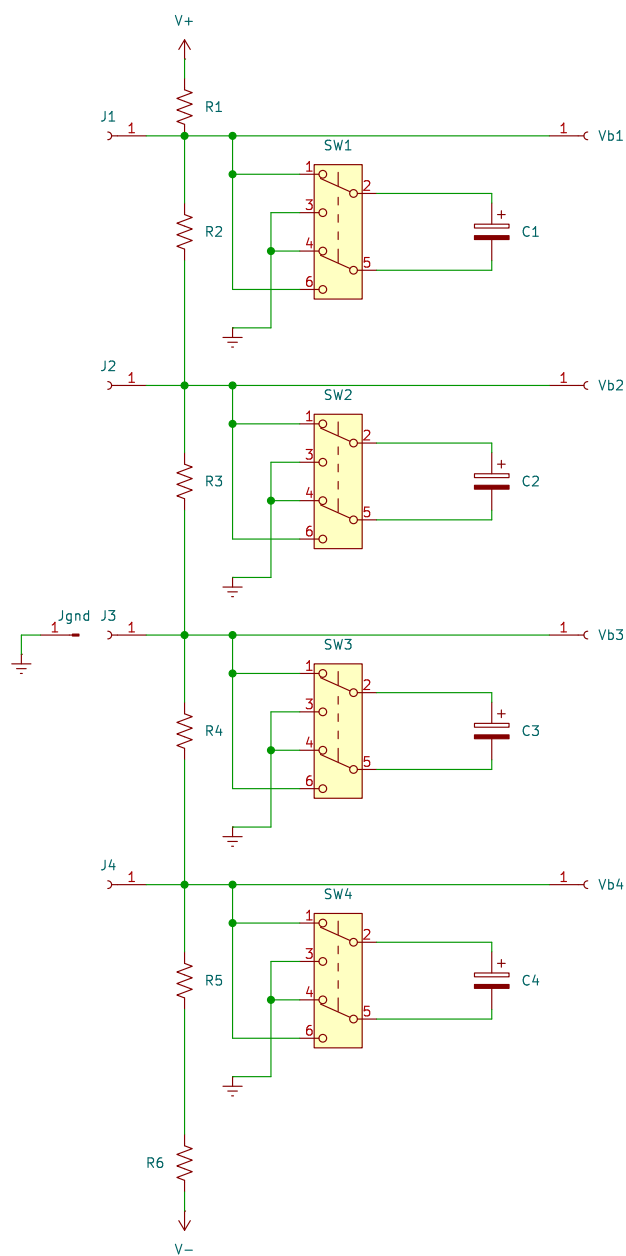


Figure 3.6: Old biasing circuit for the multitip Langmuir probe.

need to manually flip the polarity of each electrolytic capacitor using a switch mounted to a board and also move the ground via a banana connection, it is infeasible to remotely operate the bias supply. Additionally this circuit has no protection against setting the tip voltages extremely far apart which may cause arcing between wires or tips.

3.3.1.2 Remote Controlled

We've upgraded the previous setup by allowing the bias to be remotely controlled. This is done by removing the switches needed in the past setup and instead having one power supply set the voltage of the most negative tip and the other power supply set the maximum bias voltage difference between tips.

3.3.1.2.1 Principles of operation This system operates by having a large capacitor that is set to some negative voltage relative to ground. Then, all the other individual capacitors for each tip has its negative terminal set to the output of the large capacitor. Thus we can change the bias of all the tips by the same amount by changing the negative bias. The splitting of the bias voltage is similar to the previous setup where the voltage from the positive power supply is split using a series of resistors. The circuit schematic and images of the circuit can be seen in figures 3.7 and 3.8 respectively.

We can write out the individual tip biases mathematically as

$$V_{bi} = \frac{V_+}{N+1}i + V_- \quad (3.3)$$

where V_{bi} is the tip bias, $V_+ \geq 0$ and $V_- \leq 0$ are the applied biases, i is the tip number, and N is the number of tips.

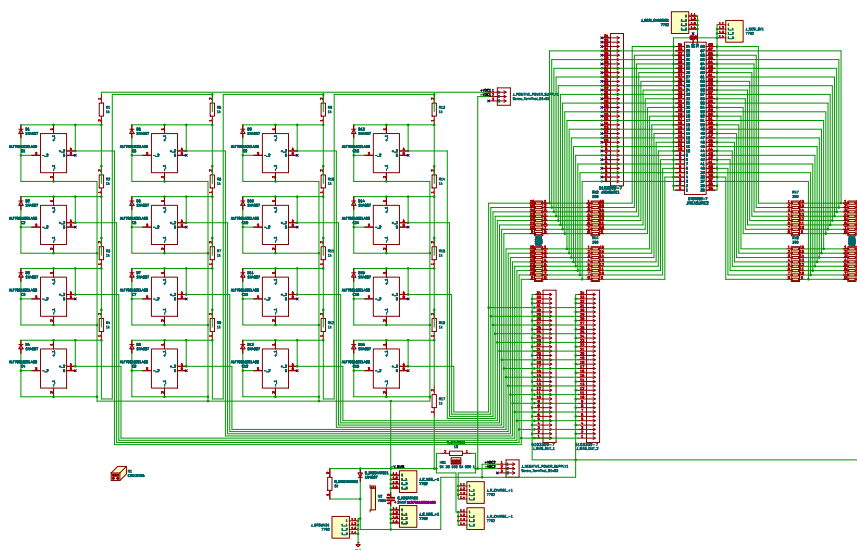


Figure 3.7: Circuit diagram of the new biasing setup. The left side consists of capacitors with reverse voltage protection diodes. Each capacitor is separated from the next by a resistor. At the bottom is the large capacitor for setting the negative voltage and it's diode & discharge resistor. The top right are connections necessary for dividing down the bias voltage for measurement and the bottom left are ribbon cable connections for applying voltage to the tips.

3.3.1.2.2 Problems Although this system works wonderfully to remotely control the bias such that we don't have to be running up and down the stairs all day long, it does come with it's own set of issues.

During running when the probe was at low radius and $V_- = -225$ V, the positive power supply broke and a short to ground was formed internal to the power supply between the negative and ground banana connection terminals. This was most likely due to some transient that sent the positive power supply more than 300 V from ground which the power

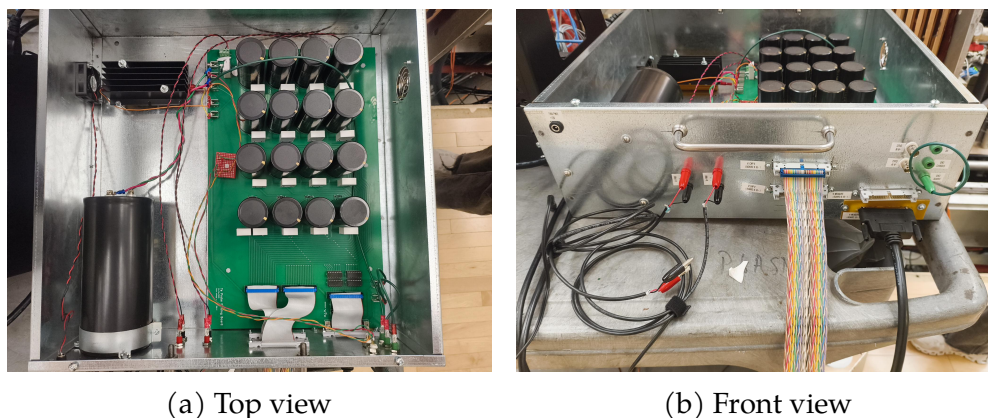


Figure 3.8: An image of the circuitry for the new bias power supply. In panel 3.8a: the top left is a fan for cooling the charging resistor hidden beneath a heat sink in black, the bottom left shows the negative capacitor that sets the ground of the rest of the circuit, the top right black cylinders are the individual tip capacitors and white rectangles are high power resistors for the voltage division, bottom right are connections to the front panel. In panel 3.8b: the top left is the fan power, the red and black banana connections are to the power supplies, the rainbow ribbon cable is the connection to send bias to the tip circuit, the bottom right black cable is for measurement of the bias voltage, and the green banana is a connection to the laboratory ground.

supply can not do.

Additionally the 10 W discharge resistor initially used for discharging the negative capacitor burned out because the power load was higher than expected. We replaced it with a large carborundum resistor that can handle 50 W.

3.3.1.2.3 Calibration

Calibration of the supply consists of two things:

- The power supplies are remotely controlled through LabView which communicates with a CompactRIO analog output module that sends an isolated control voltage to the power supply. This output signal has a voltage offset and is not a perfect conversion between set voltage

Name	Symbol	Value	Unit
Old Bias Circuit			
Positive bias voltage	V_+	$0 \leq V_+ \leq 250$	V
Negative bias voltage	V_-	$-250 \leq V_- \leq 0$	V
Tip capacitor		1.5	mF
Divider Resistor		???	Ω
New Bias Circuit			
Positive bias voltage	V_+	$0 \leq V_+ \leq 250$	V
Negative bias voltage	V_-	$-250 \leq V_- \leq 0$	V
Tip capacitor		1.6	mF
Divider Resistor		1	k Ω
Negative bias capacitor		24	mF
Charging resistor		10	Ω
Discharging resistor		1	k Ω

Table 3.2: Bias circuit component values

and output voltage that can be corrected by a multiplicative factor. We can do both these corrections by setting a voltage in LabView and seeing what voltage the power supply is outputting. This is just a problem of fitting a straight line with an offset.

- We also need to calibrate the measurement of the bias voltage. Since the digitizers have an internal offset voltage and there is a resistor divider between bias and measurement we must correct for both of those. This is similarly a case of measuring the output bias voltage and correcting the digitizer measurement to match that value.

3.3.2 Probe Circuit

Now that we can apply a voltage to the tip, we need some way to measure the current to the probe. We do this using a commonly used circuit setup with a few additions for our setup which can be seen in figure 3.9.

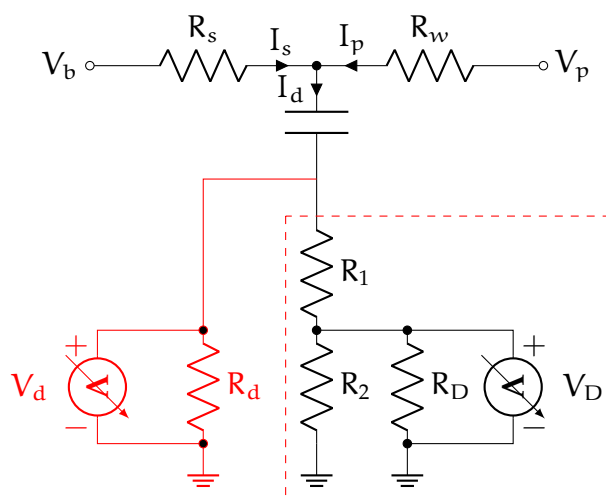


Figure 3.9: Circuit for a single tip on the multitip probe. We can reduce the circuit contained in the red dashed rectangle to the red circuit using the equation for a voltage divider.

3.3.2.1 Principles of operation

We apply the bias at the node labeled V_b . When the probe pulls current from the plasma, I_p , this changes the tip voltage and pulls the voltage closer to the floating potential since there is a voltage drop across the sense resistor, R_s . The capacitor and resistor divider RC times acts to shield the DC component of the probe bias voltage. The voltage difference across the sense resistor is measured by a digitizer which sees V_D but that resistor divider can be simplified to a measured voltage of V_d . We want the probe voltage, V_p , and the probe current, I_p , to fit the plasma parameters.

3.3.2.2 Single-ended measurement

We've used the TREX cells in the past which are single ended digitizers that can sample between 2.5 MHz (32 channels) and 20 MHz (4 channels). These work pretty well for our lower frequency experiments like those with the drive coils. Unfortunately because of the high voltages and large

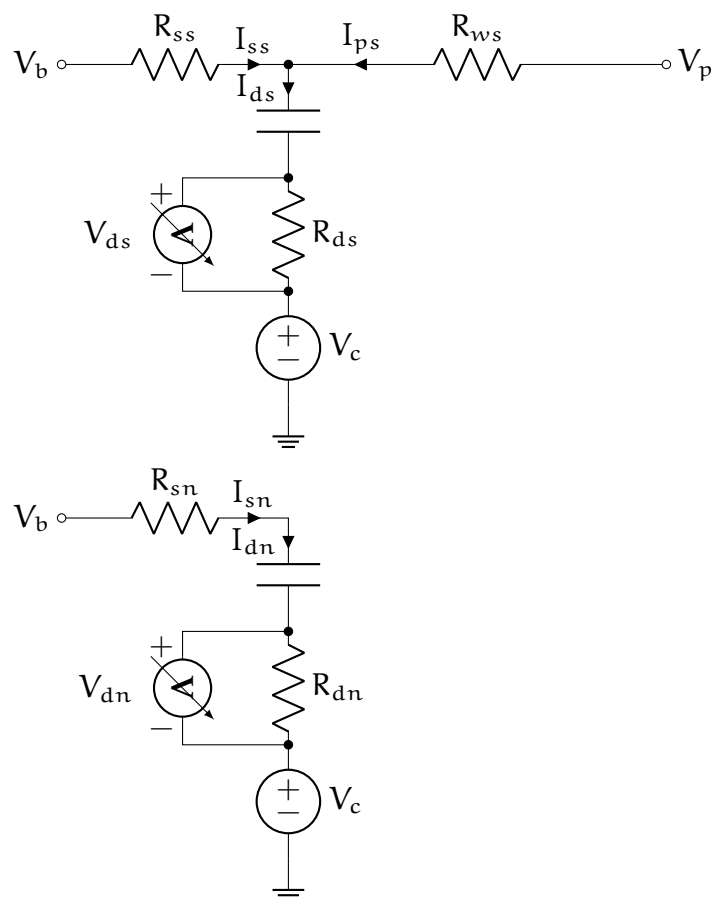


Figure 3.10: Circuit for a single tip on the Langmuir probe alongside the circuit for measuring noise. The V_b inputs are the same for both circuits but since the bias not change during a shot we will ignore any currents flowing between the circuits. The subscripts are organized as (element, circuit) where the elements are b = bias, s = sense resistor, w = wire, p = probe, d = digitizer and the circuits are n = noise, s = signal. In our equations we don't use the raw voltages from the digitizers (V_{ds} and V_{dn}) and instead use the currents (I_{ds} and I_{dn}) which we can find using $V = IR$. The noise is modeled as a changing chassis voltage.

Table 3.3: Probe circuit component values

currents, the ground of these digitizers can change a lot during a shot even if they are on isolation transformers to remove their reliance on the lab ground. This circuit can be seen in figure 3.11.

3.3.2.3 Differential measurement

We've developed a new circuit board to make use of our D-TACQ digitizers which measure using a differential input. Instead of measuring between the digitizer ground and the resistor divider output, we instead duplicate all the circuit elements on the board meaning each tip has two sense resistors, two capacitors, and two resistor dividers. One of the circuits is still connected to the probe tip through it's wire but the other is only connected to the bias voltage input. Thus we can measure the difference between these two signals.

This vastly improves the signal quality and helps to remove much of the noise we previously saw when the capacitor banks were triggered.

3.3.2.4 Circuit Solution

During a shot, noise is generated around the lab because of the high currents used to create the reversed magnetic field for reconnection. To remove this noise we use another circuit that has the same components but is not connected to a plasma facing tip which can be seen in figure 3.10. We'll call this other circuit the **noise circuit** and the circuit that is connected to the tip the **signal circuit**. If there was no noise in the lab we would expect to measure no fluctuations on the noise circuit digitizer.

In order to get the IV-curve needed for extracting out the plasma parameters we need to solve for the probe voltage and current. To do this, we'll take figure 3.10 as our model where we have modeled the noise

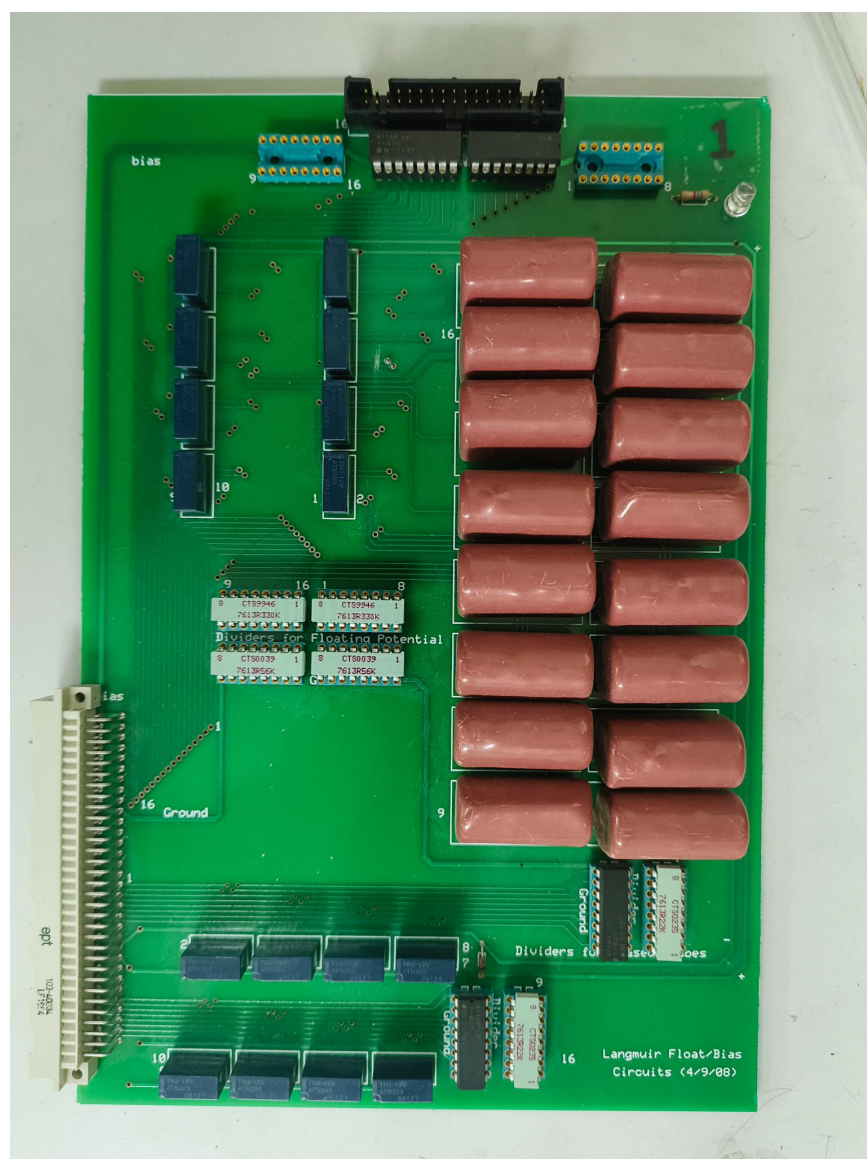


Figure 3.11: Image of circuit board used for single-ended measurements. The top ribbon connector is where the bias comes in. Just below that connector are multiple sense resistors. Often those are replaced with hand soldered higher power resistor networks. The pink rectangles on the right are the capacitors as can be seen in figure 3.9. The resistor networks in black and light blue in the bottom right are a resistor divider prior to measurement whose signals leave out the tan connector at bottom left.

Figure 3.12: Image of new circuit board

as a fluctuating ground voltage¹. This isn't a perfect model as it ignores other sources of noise from the digitizer or bias fluctuations (which it may actually account for) but it works well for our purposes. The capacitor in this circuit has nearly no time dependence over the shot so we treat it as having a constant voltage drop of V_b .

3.3.2.4.1 How do we solve this Using Kirkoff's laws we can construct a system of linear equations. Kirkoff's current law gives us two equations for the nodes in the signal and noise circuits and Kirkoff's voltage law gives six equations connecting any end node combination in each circuit. We solve these equations using SymPy, a symbolic math library in Python. These give the following:

$$I_{ps} = \frac{1}{R_{ss}} [(R_{ds} + R_{ss})I_{ds} - (R_{dn} + R_{sn})I_{dn}]$$

$$V_{ps} = \frac{1}{R_{ss}} [(R_{ds}R_{ss} + R_{ds}R_{ws} + R_{ss}R_{ws})I_{ds} - (R_{dn}R_{ss} + R_{dn}R_{ws} + R_{sn}R_{ss} + R_{sn}R_{ws})I_{dn}] + V_b$$

Since the digitizers are measuring the voltage output of the resistor divider we have replaced the measured voltages, V_D , with the currents, I_d , which is the total current flowing through the resistor divider. Since we know the measured voltage and the resistances of the divider and digitizer we can find the current using Fig. 3.9:

¹We've also tried modeling the noise using a fluctuating current that appears on both the probe signal and where a probe would attach in the noise circuit. This did not work as well as the ground voltage fluctuation method though.

$$\begin{aligned}
R_d &= R_1 + (R_2^{-1} + R_D^{-1})^{-1}, \\
V_D &= \frac{(R_2^{-1} + R_D^{-1})^{-1}}{R_d} V_d, \\
I_d &= \frac{V_d}{R_d}
\end{aligned}$$

Thus our final equations for the probe voltage and current are

$$I_d(V_d) = \frac{V_d}{R_d} = \frac{V_D}{(R_2^{-1} + R_D^{-1})^{-1}} \quad (3.4)$$

$$I_{ps}(I_{ds}, I_{dn}) = \frac{1}{R_{ss}} [(R_{ds} + R_{ss})I_{ds} - (R_{dn} + R_{sn})I_{dn}] \quad (3.5)$$

$$\begin{aligned}
V_{ps}(I_{ds}, I_{dn}, V_b) &= \frac{1}{R_{ss}} [(R_{ds}R_{ss} + R_{ds}R_{ws} + R_{ss}R_{ws})I_{ds} \\
&\quad - (R_{dn}R_{ss} + R_{dn}R_{ws} + R_{sn}R_{ss} + R_{sn}R_{ws})I_{dn}] + V_b
\end{aligned} \quad (3.6)$$

3.3.2.4.2 Assumptions Here we have assumed that all the noise is coming from a fluctuating ground which is an alright assumption as we do expect significant ground fluctuations that could easily change the measurement. We see less of these fluctuations during shots with no plasma which may mean part of this noise is coming from current drawn by the probe. It remains to be seen if there are better ways to model the common-mode noise or if we are accidentally removing bias voltage fluctuations that may be necessary for better IV-characteristic reconstructions.

3.3.2.5 Calibration

Try as we might, we can't perfectly manufacture these probes such that the areas of each tip are the same and the various resistances all match. The best way to calibrate this probe is using the plasma itself.

3.3.2.5.1 Calibrating in Ion Saturation Regime When the current to the probe is dominated by the ions, the IV-characteristic is very flat. By setting all tips to the same very negative bias voltage we measure different currents to each tip. The relative difference between measurements is nearly the same as the relative area difference between those tips.

3.3.2.5.2 Calibrating on the exponential In the ion attracting regime but near the plasma potential, the shape of the IV-characteristic is approximately exponential. Since our initial plasma is very cold (~ 4 eV), the rise is very swift. Thus setting the tip potential to be near the plasma potential during the equilibrium plasma before the drive coils gives us the ability to calculate the wire resistance such that all the points on the IV-characteristic are at the same voltage.

3.3.2.5.3 Bayesian calibration We can actually do both of these calibrations using Bayesian statistics where we solve for the probability of the area (or resistance) based on the current to the probe. By finding the probability of the measured current for some area assuming some amount of noise and then applying a prior that forces the area to be in some reasonable range let's us find the most probable area. The same can be done for the resistance.

3.3.2.5.4 Calibration using pressure wave Although we can calibrate the relative areas between probes we need some way to get the actual plasma parameters (not just the relative ones)! We do this using data from the previous chapter. Since that method works well to extract the initial density profile we can change the tip areas to best match those results.

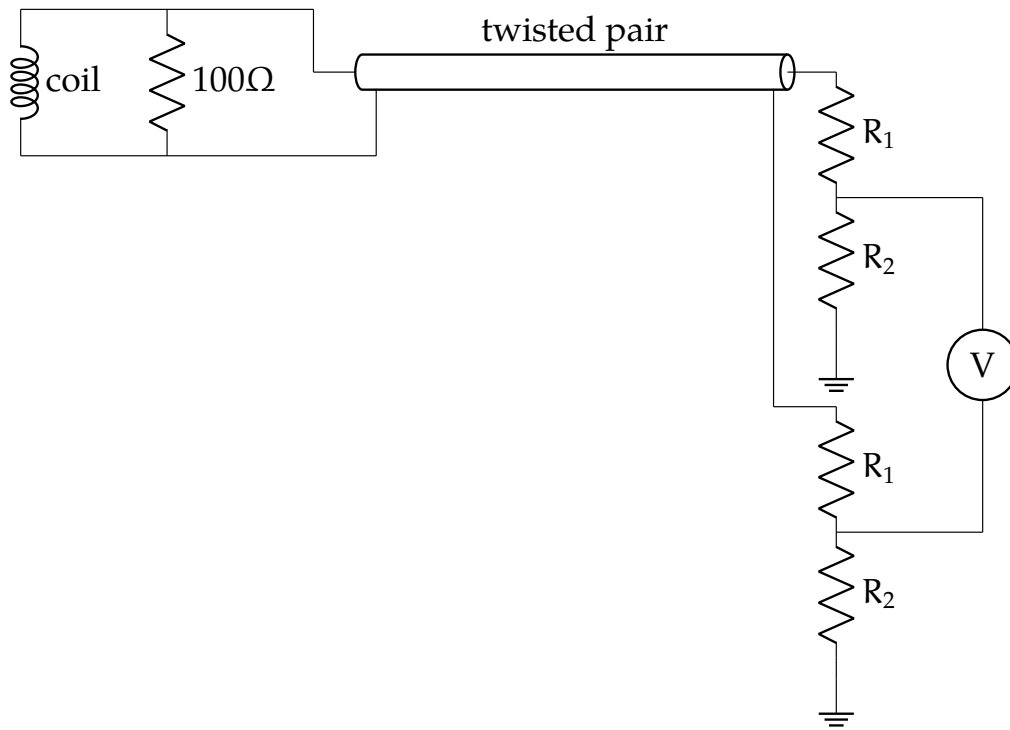


Figure 3.13: The Bdot coil circuit. The top left inductor and resistor and near the probe tip. The signals are extracted using twisted pair and then divided down before a differential measurement.

3.3.3 Bdot coils

The Bdot coils, while basic in theory, need some help to actually give physical results.

3.3.3.1 In-shaft circuit

Inside the stainless shaft connected to the probe, there is another circuit containing some resistors and various through holes. Since each coil wrap is really two coils (as they are wrapped using twisted pair) this is where those two coil signals are separated. The resistor is in place to improve the system response to high frequency.

3.3.3.2 Circuit model

We model the circuit using figure 3.13. The small resistor near the coil does not come into play for analyzing the signal. As of this writing we assume a linear response between fluctuating magnetic fields and measured voltage but a better solution would be measurement of the transfer function.

3.3.3.3 Calibration

Although we could use a handheld coil for calibrating the areas and directions of this coil, it is far easier and more accurate to use the drive coils as a calibration source. Without plasma, we can model the expected magnetic field assuming they induce current in the BRB walls such that no field can escape (this is true since the BRB shell is made of aluminum and the induced currents have continuous paths). Using these modeled fields we can match the measurement to the expected field and by rotating the probe and moving the probe figure out the vector areas.

3.3.3.4 Signal Interpretation

Once we have the vector area of each coil, $\mathbf{A}_i$, we can now extract the $\mathbf{B} \cdot \mathbf{A}_i$ signal. According to Faraday's law,

$$\mathcal{E}_i = \mathbf{A}_i \cdot \dot{\mathbf{B}}. \quad (3.7)$$

Now we measure a signal, S_i , where

$$S_i = \frac{R_2}{R_1 + R_2} \mathcal{E}_i. \quad (3.8)$$

Assuming the coils make a basis for $\mathbb{R}^3$, we can turn this into an inverse problem:

$$\begin{bmatrix} S_1 \\ S_2 \\ \vdots \\ S_6 \end{bmatrix} = \begin{bmatrix} \mathbf{A}_1 \\ \mathbf{A}_2 \\ \vdots \\ \mathbf{A}_6 \end{bmatrix} \cdot \dot{\mathbf{B}} \quad (3.9)$$

$$\mathbf{S} = \mathbf{A} \cdot \dot{\mathbf{B}} \quad (3.10)$$

Now $\dot{\mathbf{B}}$ is overdefined since we have six measurements and three field components so using linear least squares² we can solve for $\dot{\mathbf{B}}$ and also the standard deviation of $\dot{\mathbf{B}}$. This is useful in understanding where we might expect error in our signals and whether we need to smooth signals to get rid of noise caused by the firing of the capacitor banks (which is sometimes needed).

3.4 Plasma Theory

The depth of theory needed to correctly understand Langmuir probes is near endless with a menagerie of exciting physical effects one could account for. I'm prone to dive a bit too deep into some of these various theories but after much literature review and some mistakes we've come to a theory that seems to work relatively well for our results. Here I'll discuss the prior method using a very simple model and another method that gives much better results.

²We've also tried using generalized least squares (since coils made of the same twisted pair may have more correlated noise) but we did not see a significant improvement.

3.4.1 Simple Plasma Theory (Hutchinson)

Hutchinson (2002) develops a simple model for the current to a Langmuir probe that we have used for a long time. It assumes that the ion current is constant and the electron current follows an exponential and only looks at the electron repelling region.

3.4.1.1 Derivation

We won't reproduce the derivation here but will instead describe the physical interpretation.

The volume surrounding the probe is split into two regions: **the plasma** where the electric field is very small, quasineutrality holds, and the potential is near the plasma potential vs. **the sheath** where the ion electron charge densities are different and the electric field is large such that the potential quickly jumps to the probe potential.

The ion current is just modeled by how many ions randomly cross the plasma-sheath interface (the interface will be denoted by subscript s). If the ions are cold (i.e. negligible initial kinetic energy) then they will only get to the probe via their random motion. The speed of these ions is set by the voltage at which the interface appears which is where

$$V_s = -\frac{T_e}{2e}. \quad (3.11)$$

V_s is the potential at the interface relative to the plasma potential. Assuming the electrons are Boltzmann and quasineutrality holds at the interface then

$$n_{is} = n_{es} = n_{\infty} \exp\left(\frac{eV_s}{T_e}\right). \quad (3.12)$$

Now we can calculate the ion current as

$$I_i = A_s v_{is} n_{is} \quad (3.13)$$

$$= A_s \sqrt{-\frac{2eV_s}{m_i}} n_\infty \exp\left(\frac{eV_s}{T_e}\right) \quad (3.14)$$

$$= \exp\left(-\frac{1}{2}\right) A_s n_\infty \sqrt{\frac{T_e}{m_i}}. \quad (3.15)$$

We often assume that the sheath area is the same as the probe area since the Debye length is so short.

For the electron current, we are assuming they are Boltzmann and they will hit the probe due to random motion. Since they are repelled by the probe the density will be smaller than in the bulk plasma. We can write the electron current as

$$I_e = A_p \frac{1}{4} \sqrt{\frac{2T_e}{m_e}} n_\infty \exp\left(\frac{eV_{\text{probe}}}{T_e}\right) \quad (3.16)$$

where the square root is the average electron velocity and the exponential is the factor the electron density is reduced.

The total current to the probe for $V_{\text{probe}} < V_{\text{plasma}}$ is thus

$$I = n_\infty e A_p \sqrt{T_e m_i} \left[\frac{1}{2} \sqrt{\frac{2m_i}{\pi m_e}} \exp\left(\frac{eV_{\text{probe}}}{T_e}\right) - \exp\left(-\frac{1}{2}\right) \right]. \quad (3.17)$$

3.4.1.2 Pros & Cons

This method has the benefit of being exceedingly simple to implement and often widely applicable. As long as the tips stay below the plasma potential this usually nicely matches our measurements. Unfortunately there's the catch, during a shot the plasma potential changes quickly by up to 100 or more volts. One option is to select only probe tips that look like they are below the plasma potential but this is both time consuming

and prone to bias. Thus we look for a new method.

3.4.2 BRL

Laframboise (1966) created a model for the current to a cylindrical probe in a plasma with maxwellian ions and electrons that works for probe voltages above and below the plasma potential. Unfortunately, to my knowledge nobody has redone these calculations nor made a public repository with the code. To sidestep this issue we've used two simplifying approximations.

For probe potential greater than plasma potential, i.e. electrons attracted, we follow along with appendix F of Laframboise (1966). We assume the ions have zero temperature. Although we have no way currently to calculate the ion temperature it is an assumption we commonly make for plasmas from our plasma guns. Additionally we assume we assume that the probe radius is far larger than the debye length. This approximation is valid for the initial plasma but can change throughout the shot. We also assume that all particles that touch the probe are absorbed by it.

Since the scale over which the potential changes is proportional to the debye length, we assume we have a planar probe. Thus Poisson's equation is given by

$$\frac{d^2\phi}{dx^2} = -\frac{\rho}{\epsilon} \quad (3.18)$$

Since the ions have zero temperature, they can not enter the $\phi(x) > \phi_0$ region and thus for the plasma charge density, $\rho(x)$, they can be ignored. Without loss of generality we'll set the plasma potential, ϕ_0 , equal to 0. Since this region of electrons only plasma physically can't extend to infinity let's define $x = 0$ to be this boundary and let x increase towards the probe.

As this is a one-dimensional system then we have three conserved quantities. v_y and v_z which denote the transverse velocity will not be

changed by the potential and the kinetic energy in the x direction along with the electrostatic potential, $E_x = mv_x^2/2 + e\varphi(x)$. e is the elementary charge. As all electrons will be absorbed by the probe, we will only have flow into the $\varphi(x) > 0$ region. Thus our distribution function looks like

$$f(x, E_x, E_t) = \begin{cases} n_0 \left(\frac{m}{2\pi kT}\right)^{3/2} \exp\left(-\frac{E_x(x)}{kT}\right) \exp\left(-\frac{E_t}{kT}\right) & v_x > 0 \\ 0 & v_x < 0 \end{cases} \quad (3.19)$$

We can now write the density as

$$\begin{aligned} n(x) &= \int_0^\infty dv_x \int_{-\infty}^\infty dv_y \int_{-\infty}^\infty dv_z f(x, E_x, E_t) \\ &= \int_0^\infty \frac{dv_x}{dE_x} dE_x \int_{-\infty}^\infty dv_y \int_{-\infty}^\infty dv_z f(x, E_x, E_t) \\ &= n_0 \left(\frac{m}{2\pi kT}\right)^{3/2} \int_0^\infty \frac{\exp\left(-\frac{E_x(x)}{kT}\right)}{\sqrt{2m(E_x - e\varphi(x))}} dE_x \\ &\quad \int_{-\infty}^\infty \exp\left(-\frac{mv_y^2}{2kT}\right) dv_y \int_{-\infty}^\infty \exp\left(-\frac{mv_z^2}{2kT}\right) dv_z \\ &= n_0 \sqrt{\frac{m}{2\pi kT}} \int_0^\infty \frac{\exp\left(-\frac{E_x(x)}{kT}\right)}{\sqrt{2m(E_x - e\varphi(x))}} dE_x \end{aligned}$$

Let's define $\eta = n(x)/n_0$ where n_0 is the number density at infinity. Let's also define $\chi(x) = e\varphi(x)/kT$ and $\beta = E_x/kT$ as the normalized potential and energy respectively. Thus we can write the normalized density as

$$\begin{aligned} \eta(x) &= \frac{1}{2\sqrt{\pi}} \int_0^\infty \frac{\exp(-\beta)}{\sqrt{\beta - \chi(x)}} d\beta \\ &= \frac{e^{-\chi(x)}}{2} (1 - \operatorname{erf}(\sqrt{-\chi(x)})) \end{aligned} \quad (3.20)$$

Using our now normalized quantities, let's plug them into Poisson's

equation 3.18 to find

$$\begin{aligned}\frac{\varepsilon kT}{e} \frac{d^2\chi}{dx^2} &= e\eta(x) \\ \lambda_D^2 \frac{d^2\chi}{dx^2} &= \eta(\chi(x)) \\ \frac{d^2\chi}{ds^2} &= \eta(\chi(s))\end{aligned}\tag{3.21}$$

where $s = x/\lambda_D$ and $\lambda_D = \sqrt{\varepsilon kT/n_0 e}$ is the Debye length in the undisturbed plasma.

Since the potential is zero at the sheath boundary and the derivative is smooth, $\chi(0) = 0$ and $d_s\chi(0) = 0$. For all $s > 0$, the density of electrons should be non-zero, i.e. we should never achieve a full vacuum except at infinity. Thus,

$$\frac{d^2\chi}{ds^2} > 0, \frac{d\chi}{ds} = 0 \Rightarrow \frac{d\chi}{ds} > 0 \Rightarrow \left(\frac{d\chi}{ds}\right)^{-1} = \frac{ds}{d\chi}$$

This means

$$\begin{aligned}\frac{d^2\chi}{ds^2} &= \frac{d}{ds} \left(\frac{ds}{d\chi}\right)^{-1} \\ &= \frac{d\chi}{ds} \frac{d}{d\chi} \left(\frac{ds}{d\chi}\right)^{-1} \\ \eta(\chi) &= -\left(\frac{ds}{d\chi}\right)^{-3} \frac{d^2s}{d\chi^2} \\ \Rightarrow \int_0^x \eta(\chi') d\chi' &= \frac{1}{2} \left(\frac{ds}{d\chi}\right)^{-2} \\ \Rightarrow \frac{ds}{d\chi} &= \frac{1}{2 \int_0^x \eta(\chi') d\chi'} \\ \Rightarrow s(\chi) &= \int_0^x \frac{d\chi'}{2 \int_0^{\chi'} \eta(\chi'') d\chi''}\end{aligned}$$

This integral can be evaluated numerically. Thus we can pass a probe potential, χ , and after integrating get the distance from the probe to the start of the sheath.

Since all particles that enter the sheath are collected, from equation 3.19, then we need only find how the surface area of the sheath changes for different potentials. Letting I_0 be the current collected from the electrons when the probe is at the plasma potential then the current to the probe is

$$I(\chi) = I_0 \left(1 + \frac{\lambda_D}{R_p} s(\chi) \right)^2 \quad (3.22)$$

Now that we have a model for the current to the probe for the electron attracted region, we move on to modeling the current to the probe for the ion attracted region. There has been much more work put into this region from Steinbrüchel et al. Steinbrüchel (1990) Karamcheti and Steinbrüchel (1999), Mausbach Mausbach (1997), and Chen Chen (1965). Steinbrüchel fitted a model of the form

$$I = I_{i0} a (-\chi)^b + I_{e0} \exp(\chi) \quad \chi < 0$$

where a and b were fit to the data given by Laframboise. Mausbach used

$$I = \begin{cases} I_{i0} a_i (b_i - \chi)^{c_i} + I_{e0} \exp(\chi) & \chi < 0 \\ I_{e0} a_e (b_e + \chi)^{c_e} & \chi \geq 0 \end{cases}$$

where $a_{i,e}$, $b_{i,e}$, and $c_{i,e}$ are fitted parameters for the ions and electrons.

Unfortunately neither of these correctly predict the ion current to the probe for large χ so we instead use the parametrization given by Chen Chen (2001) which better predicts ion current for $\chi < 0$. The total current

to the probe is given by

$$I = I_{i0}i(\chi) + I_{e0}\exp(\chi)$$

$$\frac{1}{i^4} = \frac{1}{(A\chi^B)^4} + \frac{1}{(C\chi^D)^4}$$

where A , B , C , and D are functions of $\xi \equiv R_p/\lambda_D$. We will reproduce the work from Chen here for the sake of completeness

$ABCD$ are defined in two different regimes. For large ξ ($\xi > 3$),

$$A, B, D(\xi) = a + b(\xi - c)^d \exp[-f(\xi - c)^g]$$

$$C = a + b \exp[-c \ln(\xi - d)] + f(1 - g \ln \xi).$$

This is accurate to within 3%.

Although not as accurate but useful for all ξ , we have

$$A = a + \frac{1}{\frac{1}{b\xi^c} - \frac{1}{d \ln(\xi/f)}}$$

$$B, D = a + b\xi^c \exp(-d\xi^f)$$

$$C = a + b\xi^{-c}$$

The values for a , b , c , d , f , and g are given in table 3.4.

3.4.3 Effect of electric fields

Electric fields during reconnection can change the average plasma potential all of the tips see which is extracted by fitting the plasma theory to the tip measurements. The effect of these electric fields is non-local because the measured plasma potential is integrated along the path of the probe shaft.

This isn't all though; electric fields can also have a local effect directly measurable by the difference in measurement between tips on one side of the probe vs. the other (see figure 3.3).

		a	b	c	d	f	g
$\xi > 3$	A	1.142	19.027	3.000	1.433	4.164	0.252
	B	0.530	0.970	3.000	1.110	2.120	0.350
	C	0.000	1.000	3.000	1.950	1.270	0.035
	D	0.000	2.650	2.960	0.376	1.940	0.234
$\xi < 3$	A	1.12	.00034	6.87	0.145	110	—
	B	0.50	0.008	1.50	0.180	0.80	—
	C	1.07	0.95	1.01	—	—	—
	D	0.05	1.54	0.30	1.135	0.370	—

Table 3.4: Values for $abcdfg$ in the Chen parametrization of the ion current to a probe.

3.4.3.1 Where does the electric field come from

There are two types of electric field to worry about:

During reconnection we expect the magnetic field to be quickly changing along the axis of the machine as the z directed field reconnects. Since we are dealing with a plasma we expect small static electric fields because of quasineutrality. Also, since the system is toroidally periodic there can be no net static field in the ϕ direction.

3.4.3.1.1 Inductive Fields These are generated by the change in magnetic field as the experiment progresses. Let's discuss what each direction magnetic field change can create:

- z : This is the field that changes most during the experiment because it is reconnecting. Because of toroidal symmetry, the most general closed loop we can construct are annulus arcs. Because of that same symmetry the changing z field will create a negligible r directed electric field but can create toroidal electric fields (in fact the drive coils generate an immense toroidal electric field to drive reconnection).
- r : This field can create either a z or ϕ directed electric field. The ϕ electric field can be generated but once again, because of symmetry,

the closed loop on the boundary of a cylinder arc causes E_z to be minimal. One other detriment to E_z is the small magnitudes of B_r which can form in the outflow region of reconnection but are not large.

- ϕ : The source of ϕ field can come from two places: a guide field that is frozen into the plasma (see 1.3.2.3) or the hall fields when the ions and electrons decouple (see 1.2.4). This allows for the formation of both r and z electric fields but because of the often small magnitude of B_ϕ we don't expect too large of fields.

3.4.3.1.2 Static Fields Since our plasmas are often quasineutral we don't expect too huge of static electric fields. Additionally, because of toroidal symmetry there can be no net static electric field in the ϕ direction because if there was a net electric field this would force the electrostatic potential to be multivalued which is physically impossible. We do have a couple places where it can appear though.

As discussed in 1.2.5.2, a trapping potential forms that changes the shape of the flux tube as it moves towards the x-point during reconnection. This potential is on the order of a few T_e Egedal et al. (2009) which gives an electric field in our device on the order of ??? V/m. This trapping potential forms to create electric fields in the rz -plane.

During the pressure wave, the low inertia of the electrons let's them speed up far faster than the ions. This acceleration occurs as the wave-front passes the plasma. This generates an ambipolar electric field in the $+r$ direction that slows the electrons and accelerates ions to enforce quasineutrality.

3.4.3.1.2.1 What is the expected static magnitude

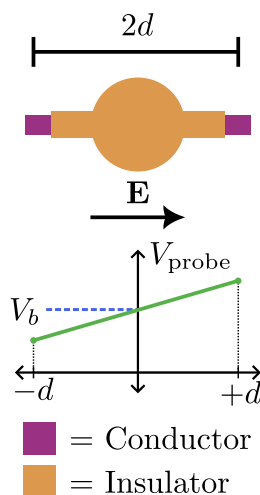


Figure 3.14: The expected effect of an electric field on the probe measurements. The tips are separated across the probe body by a distance $2d$. There is an electric field of magnitude E pointed along the direction of the tips. If both tips are set to a bias V_b , the electric field will change the left tip to be at $V_b - Ed$ and the right tip will be at $V_b + Ed$.

3.4.3.2 What does it do to the tip measurements

Let's first understand what we expect to happen and then look at some measurements.

3.4.3.2.1 Theoretical understanding Figure 3.14 shows what we expect the electric field to do to the tip biases. Any electric field, whether it be inductive or static, can cause the tip voltages to be different than what we expect from the circuit model.

3.4.3.2.2 Physical reality We can see a measurement from a shot where the probe tips were pointed in the ϕ direction (and thus seeing the effect of E_ϕ) in figure 3.15. It can be seen that tips on one side of the probe are shifted compared to tips on the other side (even and odd numbering can be seen in 3.3).

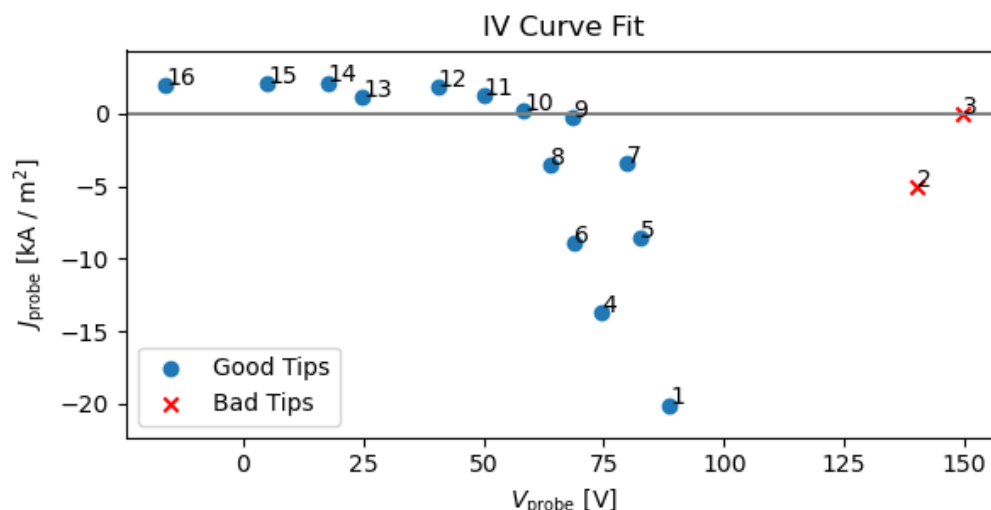


Figure 3.15: Example JV-characteristic showing the splitting of tips that are on one side of the probe vs. the other (even vs. odd). It can be seen that the even numbered tips are moved to a negative bias relative to the odd numbered tips. The actual plasma potential is at the midpoint of the shifts left and right.

3.4.4 Minimum measurable density

Since we have many tips next to each other, we may need to worry about them interfering with each other and changing the IV-characteristic. This interference is directly related to the Debye length.

3.4.4.1 What's the Debye Length

The Debye length is the distance at which electric fields are shielded in a plasma and goes as

$$\lambda_D = \sqrt{\frac{\epsilon_0 T_e}{ne}}. \quad (3.23)$$

Electric fields drop exponentially like $E = A \exp(x/\lambda_D)$ because the electrons and ions are somewhat free to move and will quickly remove any static electric field. Inductive fields on the other hand stick around and instead cause the plasma and it's frozen in magnetic field to move.

3.4.4.2 Sheath scale

As discussed in 3.4.1.1, one way to model a Langmuir probe is to use a sheath-plasma interface where quasineutrality holds in the plasma but electrons and ions separate inside the sheath. Although not all Langmuir theories have it (e.g. BRL), this interface is usually present to some approximation. The distance at which this sheath appears is often on the order of $10 \lambda_D$.

3.4.4.3 Tip-tip sheath overlap

If we have sheaths of neighboring tips that overlap (either because of high temperature or low density from equation 3.23) this could change the IV-characteristic that we measure. Often once we have high temperatures the density is high enough such that the Debye length is far smaller than the tip separation (see table 3.1) so we won't worry about temperature effects. Instead, early in the shot when the density can be low the sheaths can start to overlap. Assuming the sheath length is $20 \times \lambda_D$, this gives a minimum measurable density of

$$\chi = 20\lambda_D \quad (3.24)$$

$$= 20\sqrt{\frac{\epsilon_0 T_e}{n_{\min} e}} \quad (3.25)$$

$$\Rightarrow n_{\min} = \left(\frac{20}{\chi}\right)^2 \frac{\epsilon_0 T_e}{e} \quad (3.26)$$

$$\approx 2e - 16 \text{ m}^{-3} \quad (3.27)$$

where we've set $T_e = 4 \text{ eV}$ which is often what is seen in the initial equilibrium and χ is the distance between tips.

3.5 Curve Fitting

Once we have measurements of the probe voltage and current we can extract the plasma parameters. This is done using some sort of fitting routine.

A commonly used fitting routine is by subtracting off the ion current in the ion attracted regime and then fitting the exponential in log space using a straight line. This works quite well in swept Langmuir probe applications where you have many points on the IV-characteristic and there is not much noise.

Our system doesn't fit those criteria at all so we need to try some other options.

3.5.1 Least squares Fitting

Least squares has often been used in our lab because of its simplicity. This fitting routine operates by minimizing the squared error in J between the function to fit, $J(V)$, and the samples, (V_i, J_i) .

3.5.1.1 Benefits

Least squares is very quick to solve and thus analyzing many data points is no issue. Additionally, it is extremely easy to implement as just about any programming language offers this as an initial form of model fitting.

3.5.1.2 Issues

Unfortunately its ease also has its issues. Since it is only minimizing error in the J direction it does not account for errors in measurement that also cause errors in V . This is especially problematic when using Hutchinson's model and the probe is collecting in the electron saturation region. Since Hutchinson's model does not account for this component it artificially

raises the electron temperature and this is especially visible when only minimizing the error in J . Least squares also often uses a simple method for finding a ‘best fit’. This means that if the fit starts with a bad initial guess it may end at a suboptimal fit.

3.5.2 ODR

To correctly model the errors in our circuit we use Orthogonal Distance Regression (implemented by Boggs et al. (2005)).

3.5.2.1 What does error look like in our signals

We use three different measurements for calculating the probe current and voltage and multiple parameters that we set for the circuit. Although these parameters need calibration we don’t account for errors in them and instead set them to some static value for all shots.

Our measured parameters are V_{ds} , V_{dn} , and V_b which can be seen in equations 3.4-3.6. Errors in our V_b measurement will only cause errors in V_p whereas V_{ds} and V_{dn} will cause shifts mostly along a line that goes like

$$\Delta_I = \frac{R_d + R_s}{R_d R_s + R_d R_w + R_s R_w} \Delta_V.$$

3.5.2.2 How does ODR take that into account

Instead of passing the final values to fit, (V_i, J_i) , we instead pass the raw measurements, $(V_{Dsi}, V_{Dni}, V_{bi})$. Then we are trying to fit the model defined by

$$\begin{aligned} 0 &\approx f(n, T_e, V_p; \mathbf{V}_{Ds}, \mathbf{V}_{Dn}, \mathbf{V}_b) \\ &= J_p^{\text{theory}}(V_p^{\text{circuit}}(\mathbf{V}_{Ds}, \mathbf{V}_{Dn}, \mathbf{V}_b), n, T_e, V_p) - J_p^{\text{circuit}}(\mathbf{V}_{Ds}, \mathbf{V}_{Dn}). \end{aligned}$$

Here the superscript defines whether we are using the plasma model (which depends on the plasma parameters to fit) or the circuit model (which depends on the circuit parameters and measurements). We've converted everything to current density as that removes ambiguity with dividing the probe current by the relative areas between tips.

Now as ODR tries to fit this model, it'll allow error in all of our measured values which correctly reconstructs the errors we might expect from our measurements.

3.5.2.3 How to apply parameter bounds

More recent iterations of ODR have methods of applying bounds Zwolak et al. (2007). Unfortunately because of dependency issues between MD-SPlus (our experiments data storage system) and odrpack we use a different method for applying bounds.

3.5.2.3.1 Why apply bounds It's not clear that we necessarily need bounds for the parameters we are trying to fit. Why not let the plasma parameters wander to wherever they best match the data? Well, if we did that we would get a lot of spurious solutions that wouldn't be continuous in time and also potentially unphysical (what does a negative density mean? a negative temperature? what if the fit temperature is 10^{10} eV?).

3.5.2.3.2 Our method We know that physically the density and temperature should both be greater than zero. An easy way to do this is to instead fit the logarithm of those parameters. Then no matter what the final fit value is, when converted to a physical number it will be positive.

Sometimes we want to set both upper and lower bounds instead of just lower bounds. To do this we fit a parameter x for the plasma parameter y where

$$y = y_{\min} + (y_{\max} - y_{\min}) \left(\frac{1}{2} + \frac{1}{\pi} \arctan(x) \right).$$

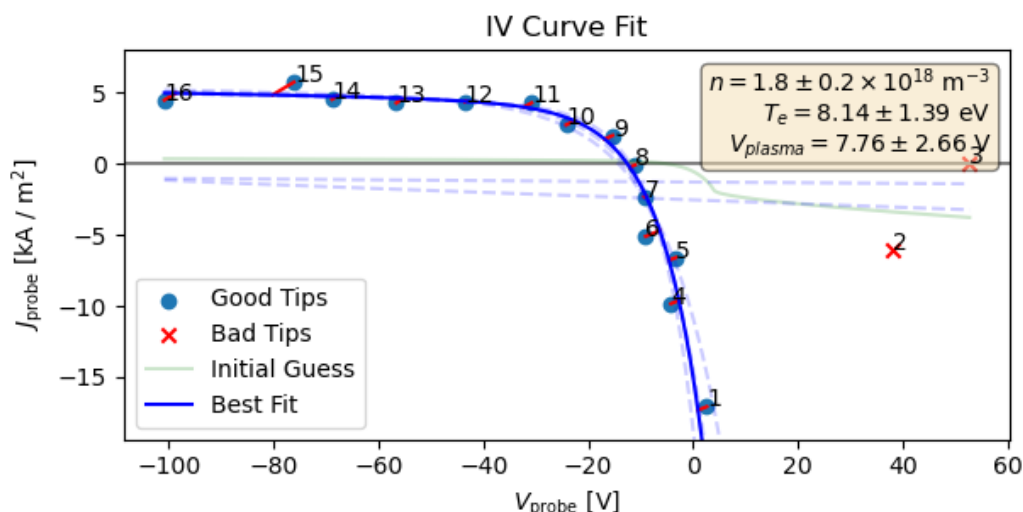


Figure 3.16: Example fit for using Chen's IV-characteristic and Orthogonal Distance Regression.

Thus no matter the final fit value of x , the plasma parameter stays within the set bounds.

3.5.3 Monte-carlo Fitting

The dream of many (or at least me) is an algorithm that always finds the global minimum to a given function. Since not all dreams come real we use a simple method that will do instead.

3.5.3.1 Global vs. local minima

What do I mean by a global minimum though and why does it matter. As can be seen in figure 3.16, the dashed blue lines are 'local' optimums to the fitting function. That is the fitting function thinks it has found the correct solution and stops fitting. An example of this is Newton's method for a function with many bumps. A starting point may or may not lead to the global minimum and could instead be stuck elsewhere. As can be seen

from the figure some of those solutions are really bad (like the ones that are nearly horizontal lines).

3.5.3.2 A simple solution

A bad starting point can lead to a bad solution so let's do something simple: let's take lots of starting points! Although we may get some atrocious solutions, some of them will match much better with the data and we can choose the best option.

3.5.3.3 How do we sample initial conditions

We start the procedure with a best initial guess. This is often whatever the previous fitting result is because the plasma should be somewhat similar to the plasma 0.1 microseconds ago. Now we choose some amount that the plasma may have changed by (i.e. the density could be an order of magnitude smaller or an order of magnitude higher). Now we have starting parameter bounds on n , T_e , and V_{plasma} . We choose some number of starting points N . Now we use latin hypercube sampling which tries to well sample the space of possibilities without overlapping parameter choices.

3.5.3.4 Choosing the best answer

Now that we have N possible solutions we just look for the solution that minimizes the measurement error the most. Simple as can be.

3.5.3.5 More robust methods for getting global minimums

Another option than our simple multiple starting point method is something like differential evolution which samples many starting points and iteratively finds regions where fits end up better and better. Although we

could implement this it would be very slow but should you have infinite computing time, let me know how it goes!

3.5.4 Combining multiple shots

During the course of a shot, the plasma potential can jump by more than 150 V. We want to sample many points near the exponential which we want all the tips to have similar V_{probe} . Thus our solution is to combine multiple shots where the probe tips are shifted by some amount each shot so for one shot we can handle low V_{plasma} and for another we can deal with high V_{plasma} .

3.5.4.1 Using some time points from each shot

One option for this method is to look at each shot with the same experimental parameters and the probe at some location and select time regions to use. This is nice in that you aren't averaging over multiple shots but can make the plasma parameters jump from one solution to another. Also you are losing potential data that could be useful in getting a more accurate fit.

3.5.4.2 Combining all IV points and fitting that

Another option is to combine multiple shots and fit all the tip measurements from all the tips at once. This has the advantage of getting more accurate fits and a more continuous plasma parameter solution both of which are desirable.

There are two issues with this:

- Lack of reproducibility smears out the curve leading to erroneous plasma parameter solutions. This is difficult to deal with in either case as one arbitrarily chooses one shot and the other tries to combine them in a potentially strange manner.

Figure 3.17: Example fit using many shots, multiple local parameter fits, and errors

Figure 3.18: Plot of isat currents from BRL

Figure 3.19: Radial chord of initial density with Hutchinson vs BRL.

- Our triggering method is quite accurate but has a standard deviation on the order of a couple tenths of microseconds. This requires some timing alignment which we will go into in 4.5.1.1.

3.6 Results

What is the benefit of doing all this work?

3.6.1 Measurement of low densities

3.6.1.1 How does Hutchinson vs BRL treat ion saturation

3.6.1.2 What are the experimental predictions that Hutchinson vs BRL have

3.6.1.3 How does that change the results

3.6.2 Noise resilience

Not sure how best I should show this.

3.6.3 Fits more accurate

- Each fit uses many data points
 - Don't have to arbitrarily cutoff data points

Figure 3.20: Comparison of expected E from Ohm's law and measured E .

3.6.4 Extracting electric fields

3.6.4.1 Where do we expect electric fields to be

3.6.4.2 Do we see them there

4 PRESSURE ANISOTROPY PROBE

4.1 How can we measure Pressure Anisotropy

4.1.1 Thomson Scattering

4.1.1.1 Pros

4.1.1.2 Cons

- Requires a lot of playing around with optics
- Size of machine
- Don't have much in-lab expertise
- Getting all the photons is tough
- Don't have optics stuff setup

4.1.2 Directional Langmuir Probe

4.1.2.1 Pros

- Simplicity
- Cost
- Mobility

4.1.2.2 Cons

- Difficult to interpret results precisely (luckily only need relative stuff)
- Can't perfectly model
- Requires a lot of playing around with circuits

Figure 4.1: Picture of feed thru along with drawings of cross-sections.

Figure 4.2: Picture of end of probe

Figure 4.3: CAD diagram of full body

4.2 Hardware

4.2.1 Shaft Components

4.2.1.1 Garages

4.2.1.2 Shaft materials

4.2.1.3 Centering Collet

4.2.1.4 Feed-thru

4.2.2 Tip Components

4.2.2.1 Probe body

4.2.2.1.1 3D printed

4.2.2.1.2 Both sides fit together

4.2.2.2 Tip material + size

4.2.2.2.1 Shell material

4.2.2.2.2 Core material

Figure 4.4: CAD diagram of probe tip

Table 4.1: Length scales of probe

Figure 4.5: Simple circuit diagram of how bias works.

4.2.2.3 Tip Shielding

4.2.2.3.1 Shell Shielding

4.2.2.3.2 Core Shielding

4.2.3 Bdot Coils

Same as Te probe

4.2.4 Connecting Bdot - Probe - Shaft

4.2.5 Length Scales

4.3 Circuitry

4.3.1 Bias Source

4.3.1.1 Principles of operation

4.3.1.1.1 Charging

4.3.1.1.2 Discharging

4.3.1.1.3 Swapping polarity

4.3.1.2 How do we do this

4.3.1.2.1 Cannibalization

Figure 4.6: Full circuit diagram of how bias works.

Figure 4.7: Image of power supply setup

4.3.1.2.2 Discharging

4.3.1.2.3 Safety Diodes for discharging the wrong way.

4.3.1.2.4 Cap arcing

4.3.1.2.4.1 What happened

4.3.1.2.4.2 Solution

4.3.1.2.5 Reducing voltage drop due to inductance

4.3.1.2.5.1 Twisting Wires

4.3.1.2.5.2 Adding cap next to board

4.3.1.2.6 Reversing polarity

4.3.1.2.6.1 Why we break relay

4.3.1.2.6.2 How do we fix this problem

4.3.1.2.7 LabView (ew)

4.3.1.2.7.1 Controls CRIO

4.3.1.2.7.2 Countdown if too high of voltage for swapping

Table 4.2: Bias circuit component values

Table 4.3: Probe circuit component values

Figure 4.8: Schematic of grounding diagram

4.3.1.3 Calibration

4.3.1.3.1 Calibrating power supply output

4.3.1.3.2 Calibrating cap bank output

4.3.2 Probe Circuit

4.3.2.1 Single-ended measurement

4.3.2.1.1 TREX cells

4.3.2.1.2 Why was this bad

4.3.2.1.3 How long did we spend on this :(

4.3.2.2 Differential measurement

4.3.2.2.1 Parallel circuitry

4.3.2.3 Figuring out grounds

4.3.2.3.1 Types of grounds on the ACQ

4.3.2.3.2 Routing grounds

Figure 4.9: Image of swapping box

Figure 4.10: Diagram of swapping

Figure 4.11: Time frame for core movie of IV with separation between relay

4.3.2.4 Swapping current paths

4.3.2.4.1 Why do we want to do this

4.3.2.4.1.1 Takes care of small differences in resistors

4.3.2.4.2 Circuitry to do this

4.3.2.4.2.1 Only swap core stuff

4.3.2.4.2.2 Many relays

4.3.2.4.2.3 Remote control

4.3.2.4.3 How does this change results

4.3.2.5 Circuit Solution

4.3.2.5.1 Solution

4.3.2.5.2 Assumptions

4.3.2.6 Calibration

4.3.2.6.1 Calibrating in isat

Figure 4.12: Circuit diagram of probe circuitry

Figure 4.13: Image of probe circuitry

Figure 4.14: Probe signals showing coupling

4.3.2.6.2 Calibrating on the exponential

4.3.2.6.3 Rotation calibration

4.3.2.7 The path to ground

4.3.2.7.1 Why do we have to care

4.3.2.7.2 How do we set it

4.3.2.8 Capacitive coupling

4.3.2.8.1 Where does it come from

4.3.2.8.2 Where do we see it

4.3.2.8.3 Magnitude of effect

4.3.2.8.4 Removing effect

Figure 4.15: Figure of theoretial plasma distributions and JV curves

4.4 Plasma Theory

4.4.1 A full model

4.4.1.1 Plasma Distribution

4.4.1.2 Ion particle flux

4.4.1.2.1 Mach effects

4.4.1.3 Electron particle flux

4.4.1.3.1 Minimum velocity

4.4.1.3.2 Area

4.4.1.3.3 Particle Flux

4.4.1.4 Theoretical JV curves

4.4.1.4.1 Reading radar plots

4.4.1.4.1.1 Radar axis

4.4.1.4.1.2 Solutions

4.4.2 Individual tip fitting

4.4.2.1 Why do this instead

4.4.2.2 Methods

4.4.2.2.1 Aforementioned methods

Figure 4.16: Simple drawing of what might happen to ions

4.4.2.2.2 Exponential

4.4.2.2.2.1 Ions don't hit core

4.4.2.2.2.2 Take care of this by allowing free parameters

4.4.2.2.2.3 Converting from plasma parameters to exponential

4.4.2.2.2.4 Converting back

4.4.2.2.2.5 Taking care of errors

4.4.2.3 Extracting plasma parameters

4.4.2.3.1 Spherical harmonics

4.4.2.3.2 Error bars

4.4.2.3.2.1 Monte-carlo

4.4.2.3.2.2 Other options

4.4.2.3.2.3 Why can we ignore non-bi-maxwellian features

4.5 Curve Fitting

We will use ODR like mentioned in Te section.

Figure 4.17: Comparison of alignment using $B_z = 0$ or $\mathbf{b} \cdot \mathbf{d}$ cross correlation

4.5.1 Combining multiple shots

4.5.1.1 Timing alignment

4.5.1.1.1 $B_z = 0$ alignment

4.5.1.1.1.1 Aligns where we expect Anisotropy

4.5.1.1.1.2 Depends heavily on prior $\mathbf{b} \cdot \mathbf{d}$ data

4.5.1.1.2 $\mathbf{b} \cdot \mathbf{d}$ cross correlation

4.5.1.1.2.1 Still requires smoothing to get rid of initial oscillation impact

4.5.1.1.3 Result comparison

4.5.1.2 Averaging of core data

4.5.1.2.1 Weighted average of relay on/off

4.5.2 Fitting shell

4.5.2.1 Use all shell data

4.5.2.2 Fit using BRL

4.5.2.3 Fits pretty good

4.5.3 Fitting core

4.5.3.1 Fitting using full routine

4.5.3.1.1 Slow

4.5.3.1.2 Model not perfectly representative

4.5.3.2 Fitting tips independently

4.5.3.2.1 Individual fitting method

4.5.3.2.2 Holding Vprobe constant

4.5.3.2.3 Exponential fitting method

4.5.3.2.4 Spherical harmonics

4.6 Results

Figure out what my results are once I have some reasonable results

4.6.1 Drive cylinder

4.6.1.1 What did we try

4.6.1.2 Why didn't we see pressure anisotropy

4.6.1.2.1 In the bdot data

4.6.1.2.2 In the PA data

4.6.2 3 coil

4.6.2.1 How much anisotropy should we expect

4.6.2.2 What setups did we try

4.6.2.3 Old results of just comparing radar plots

4.6.2.4 New results using independent fitting

5 CONCLUSION

5.1 Summary of thesis

- 5.1.1 Using pressure waves to measure density
- 5.1.2 Upgrading langmuir probe analysis and new possibilities
- 5.1.3 Using directional langmuir probes for measuring pressure anisotropy

5.2 Future work

- 5.2.1 Pressure wave
 - 5.2.1.1 Aforementioned future work
 - 5.2.1.2 Extracting cross-field diffusion
- 5.2.2 Langmuir Probe
 - 5.2.2.1 Prepared to analyze lots of cool data
 - 5.2.2.2 Extract out electric field
- 5.2.3 PA Probe
 - 5.2.3.1 Try more configurations
 - 5.2.3.2 Map out full pressure anisotropy during shot

DISCARD THIS PAGE

COLOPHON

This template uses Gyre Pagella by default. (I used Arno Pro in my dissertation.)

Feel free to give me a shout-out in your colophon or acks if this template is useful for you. Good luck!

REFERENCES

- Boggs, Paul T, Richard H Byrd, Janet E Rogers, and Robert B Schnabel. 2005. User's reference guide for odrpack version 2.01 software for weighted orthogonal distance regression.
- Chen, F F. 1965. Numerical computations for ion probe characteristics in a collisionless plasma. *Journal of Nuclear Energy. Part C, Plasma Physics, Accelerators, Thermonuclear Research* 7(1):47–67.
- Chen, Francis F. 2001. Langmuir probe analysis for high density plasmas. *Physics of Plasmas* 8(6):3029–3041.
- Chung, Kyu-Sun. 2012. Mach probes. *Plasma Sources Science and Technology* 21(6):063001.
- Demidov, V. I., S. V. Ratynskaia, and K. Rypdal. 2002. Electric probes for plasmas: The link between theory and instrument. *Review of Scientific Instruments* 73(10):3409–3439.
- Egedal, J., W. Daughton, J. F. Drake, N. Katz, and A. Lê. 2009. Formation of a localized acceleration potential during magnetic reconnection with a guide field. *Physics of Plasmas* 16(5):050701.
- Gradney, Paul. 2025. Laboratory investigation of collisionless kinetic effects and 3d topological triggers for magnetic reconnection. Dissertation/thesis, University of Wisconsin-Madison, Madison, WI.
- Hershkowitz, Noah. 1989. *How langmuir probes work*, 113–183. Elsevier.
- Hutchinson, I. H. 2002. *Principles of plasma diagnostics*. 2nd ed. Cambridge; New York: Cambridge University Press.
- Jackson, John David. 1999. *Classical electrodynamics*. 3rd ed. New York: Wiley.

Karamcheti, A., and Ch. Steinbrüchel. 1999. Parametrization of laframboise's results for spherical and cylindrical langmuir probes. *Journal of Vacuum Science & Technology A: Vacuum, Surfaces, and Films* 17(5):3051–3056.

Laframboise, James Gerald. 1966. Theory of spherical and cylindrical langmuir probes in a collisionless, maxwellian plasma at rest. Dissertation/thesis, University of Toronto (Canada), Canada – Ontario, CA.

Mausbach, Michael. 1997. Parametrization of the laframboise theory for cylindrical langmuir probe analysis. *Journal of Vacuum Science & Technology A: Vacuum, Surfaces, and Films* 15(6):2923–2929.

Merlino, R. L., and N. D'Angelo. 1987. The interaction of a conducting object with a supersonic plasma flow: ion deflection near a negatively charged obstacle. *Journal of Plasma Physics* 37(2):185–198.

Olson, Joseph. 2020. Exploring driven, high lundquist number magnetic reconnection in the laboratory: studies of sub-ion scale plasmoids, and the interplay between shocks and magnetic flux pileup. Phd thesis, University of Wisconsin-Madison.

Steinbrüchel, Christoph. 1990. A new method for analyzing langmuir probe data and the determination of ion densities and etch yields in an etching plasma. *Journal of Vacuum Science & Technology A: Vacuum, Surfaces, and Films* 8(3):1663–1667.

Zwolak, Jason W., Paul T. Boggs, and Layne T. Watson. 2007. Algorithm 869: Odrpack95: A weighted orthogonal distance regression code with bound constraints. *ACM Trans. Math. Softw.* 33(4):27–es.