vla-rl-so101 WO-07 real-eval placement grid (A3, 1:1)

Place each object's CENTRE on its slot cross. Slot ids = scripts/wo07_real_eval.py prompts.

White = seen / unseen_objects slots (SEEN_REGION centre (0.205, 0.0) m, half (0.05, 0.07) m); shaded = shifted (SHIFTED_REGION x1.5, outside seen).

Generated by scripts/make_placement_grid.py from src/eval/real_grid.py; src/eval/protocol.py 0.1-draft sha256 e9ce5bb47a88. Robot base frame, metres.

Slots: 2.5 cm (x) by 3.5 cm (y) rectangles of the shifted region; row letter = x (A nearest the base), column = y (1 = robot's left).

Protocol real-0.1 a39c1be29ec5: SEEN = B2 B5 E2 E5 C4 (demos + seen + unseen-object trials); shifted = the shaded ring; 'not used' = never in real-0.1; bowl FIXED (bowl line).

10 cm scale bar: must measure 100 mm

If not, reprint at 100% / Actual size (never Fit to page)

BOWL, FIXED for every demo and trial (real-0.1): centre x = 0.195 m, y = +0.205 m.

Along the dashed BOWL LINE (left, x = 0.195 m) the centre is 100.0 mm left of the line's end tick (y = +0.105 m),
56.5 mm beyond this sheet's left edge. Mark it on the table once; the bowl stays on the mark.

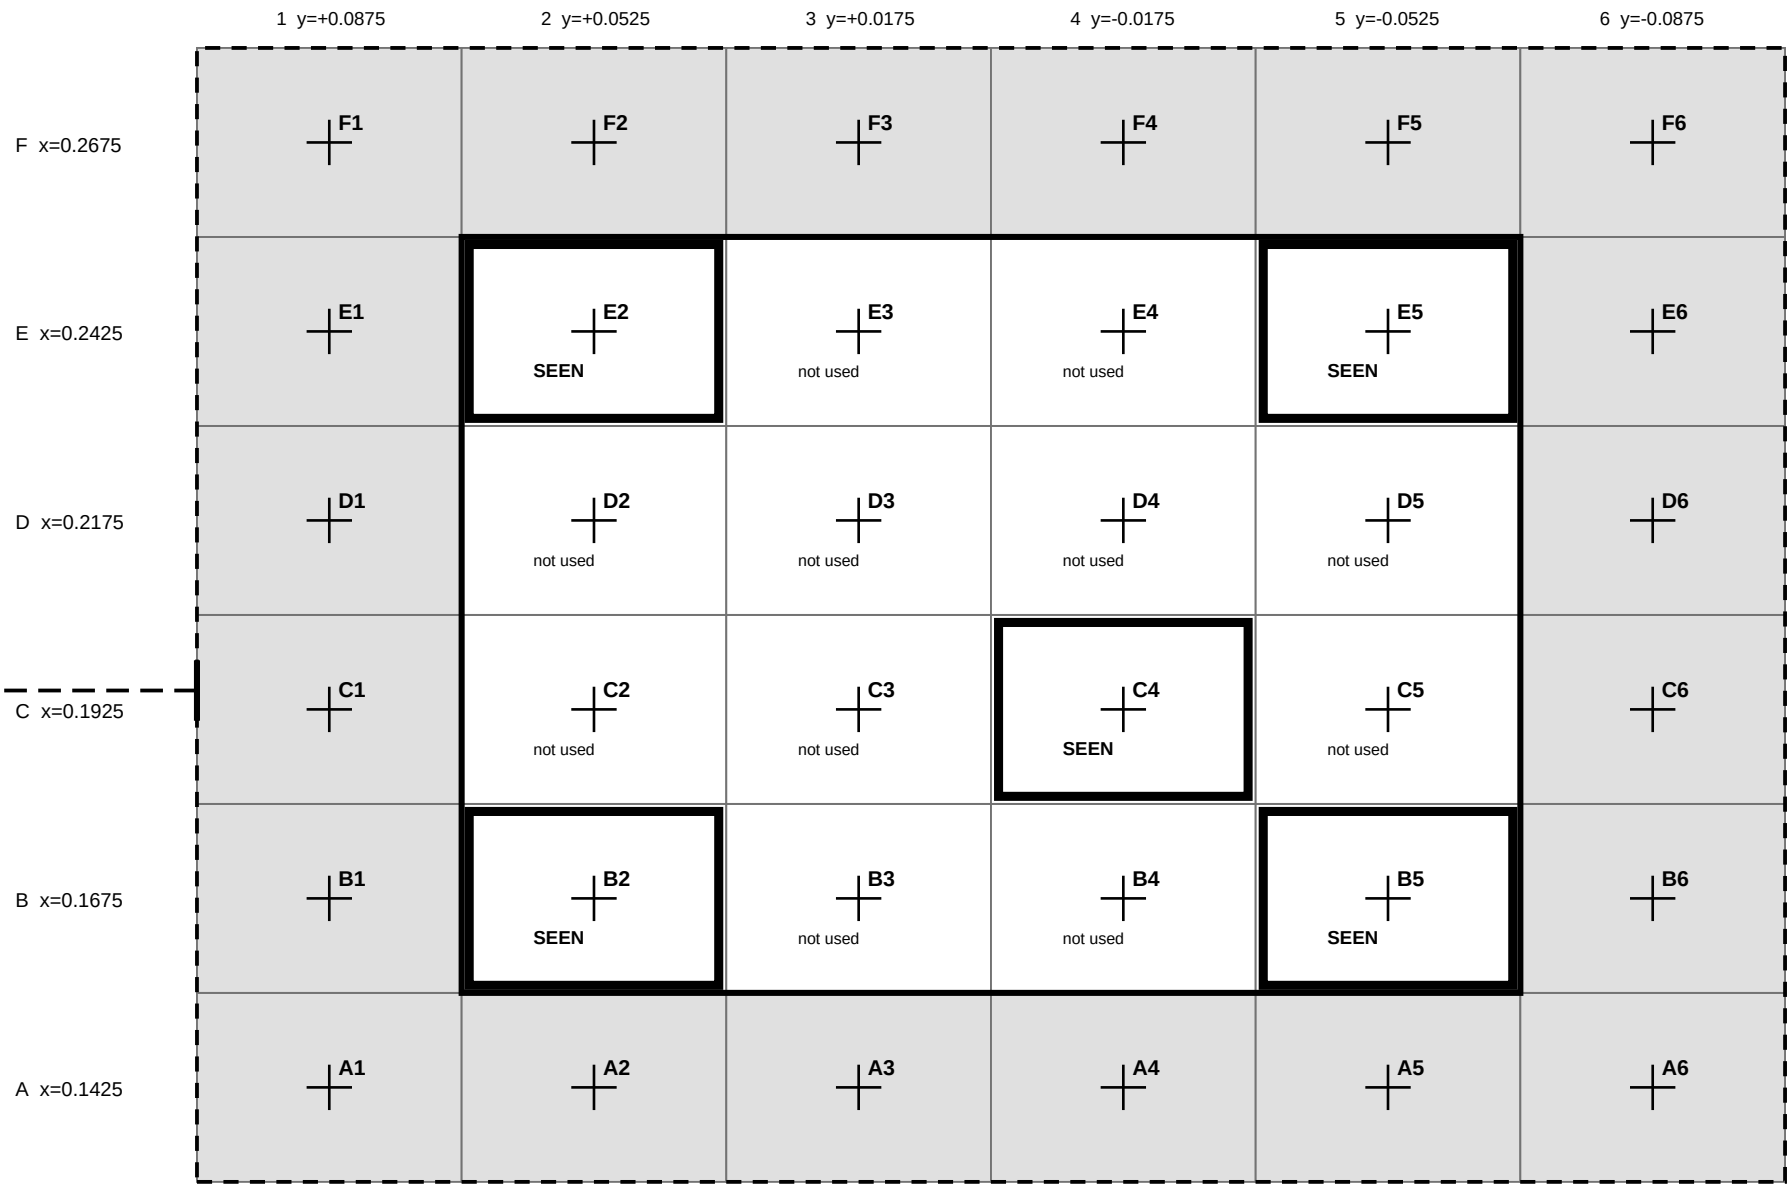

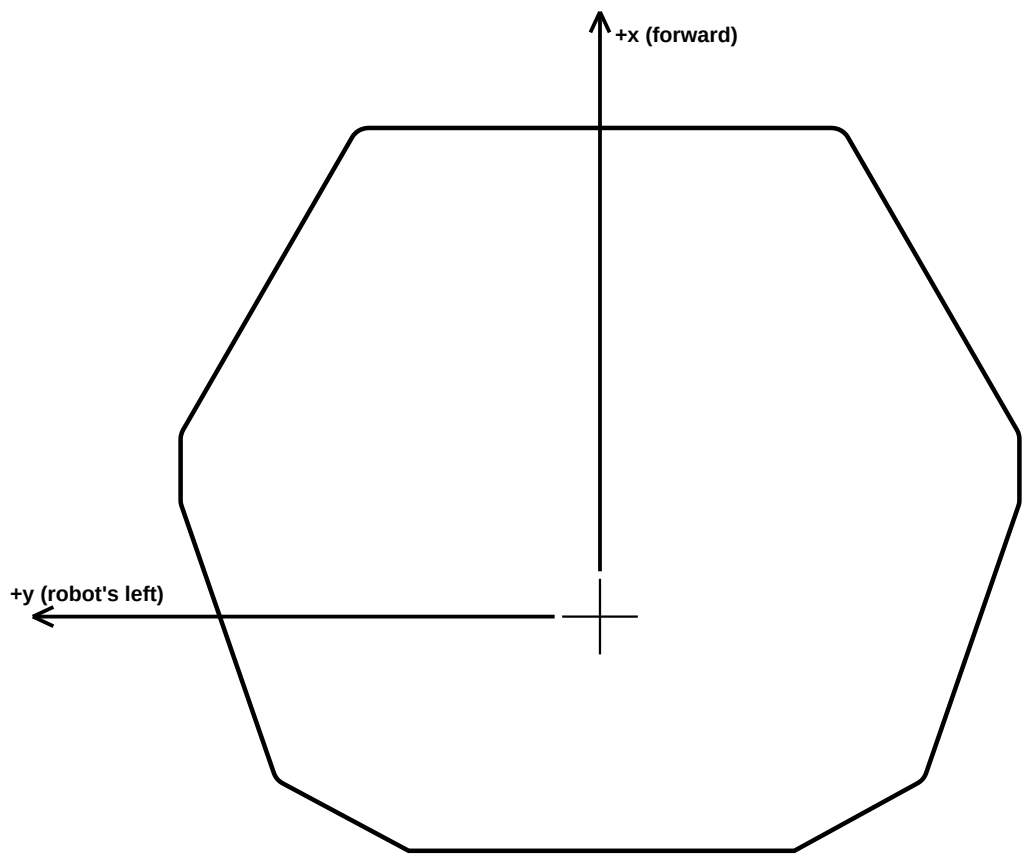

Robot base outline: URDF base_link
meshes projected on the table;
+ = base_link origin (robot frame).
Set the arm's base on this outline,
the sheet's long axis along +x.