HF46F-G SUBMINIATURE INTERMEDIATE POWER RELAY

c UL us
File No.: E134517

File No.: 40025215

File No.: CQC08001024932

Features

- 10A switching capability
- 10kV impulse withstand voltage (between coil and contacts)
- Type 2 meets VDE 0700, 0631 reinforce insulation
- Highly efficient magnetic circuit for high sensitivity: 200mW
- Extremely small footprint utilizing PCB area
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (20.5 x 7.2 x 15.3) mm

CONTACT DATA

Contact arrangement		1A
Contact resistance		100mΩ (at 1A 24VDC)
Contact material		AgNi, $AgSnO_2$
Contact rating (Res. load)		7A 250VAC / 28VDC
Max. switching voltage		277VAC / 30VDC
Max. switching current		10A
Max. switching power		2770VA / 300W
Mechanical endurance		5 x 10^6OPS
Electrical endurance	AgNi	1 x 10^5OPS (at 7A 250VAC, 10OPS/min) 1 x 10^4OPS (at 10A 250VAC, 6OPS/min)
	$AgSnO_2$	3 x 10^4OPS (at 7A 250VAC, 10OPS/min) 1 x 10^4OPS (at 10A 250VAC, 6OPS/min)

CHARACTERISTICS

Insulation resistance		1000MΩ (at 500VDC)
Dielectric strength	Between coil & contacts	4000VAC 1min
	Between open contacts	1000VAC 1min
Surge voltage (between coil & contacts)		10kV (1.2X50μs)
Operate time (at nomi. volt.)		10ms max.
Release time (at nomi. volt.)		10ms max.
Shock resistance	Functional	98m/s²
	Destructive	980m/s²
Vibration resistance		10Hz to 55Hz 1.5mm DA
Humidity		98%, +40°C
Ambient temperature		-40°C to 85°C
Termination		PCB
Unit weight		Approx. 3g
Construction		Flux proofed, Wash tight

Notes: 1) The data shown above are initial values.

COIL

Coil power	200mW

COIL DATA at 23°C

Nominal Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Max. Allowable Voltage VDC	Coil Resistance Ω
3	2.25	0.18	3.90	45 x (1±10%)
5	3.75	0.25	6.50	125 x (1±10%)
6	4.50	0.30	7.80	180 x (1±10%)
9	6.75	0.45	11.7	405 x (1±10%)
12	9.00	0.60	15.6	720 x (1±10%)
18	13.5	0.90	23.4	1620 x (1±10%)
24	18.0	1.20	31.2	2880 x (1±10%)

SAFETY APPROVAL RATINGS

UL&CUL	AgNi	10A 125VAC/250VAC at 85°C 10A 277VAC/30VDC at 85°C 7A 125VAC/250VAC at 105°C 7A 277VAC/30VDC at 105°C
	$AgSnO_2$	10A 125VAC/250VAC at 85°C 10A 277VAC/30VDC at 85°C 7A 125VAC/250VAC at 85°C 7A 277VAC/30VDC at 85°C TV-3
VDE	AgNi	7A 250VAC/30VDC at 105°C 10A 250VAC/30VDC at 85°C
	$AgSnO_2$	7A 250VAC/30VDC at 85°C 10A 250VAC/30VDC at 85°C

Notes: Only some typical ratings are listed above. If more details are required, please contact us.

ORDERING INFORMATION

	HF46F-G /	12	-H	S	1	T	G	(XXX)
Type								
Coil voltage	3, 5, 6, 9, 12, 18, 24VDC							
Contact arrangement	**H:** 1 Form A							
Construction [1]	**S:** Wash tight	**Nil:** Flux proofed						
Termination	**1:** type 1	**2:** type 2						
Contact material [2]	**T:** $AgSnO_2$	**Nil:** AgNi						
Contact plating	**G:** Gold plated	**Nil:** No gold plated						
Customer special code								

Notes: 1) Under the ambience with dangerous gas like H_2S, SO_2 or NO_2, wash tight type is recommended; please test the relay in real applications. If the ambience allows, flux proofed is preferentially recommended.

2) For the application of lamp (except LED), capacitive load, motor load or which can bring high inrush current when relay contacts connect instantly, $AgSnO_2$ contact material is recommended on priority.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

Outline Dimensions

HF46F-G/□□-H□1□□ (□□□)

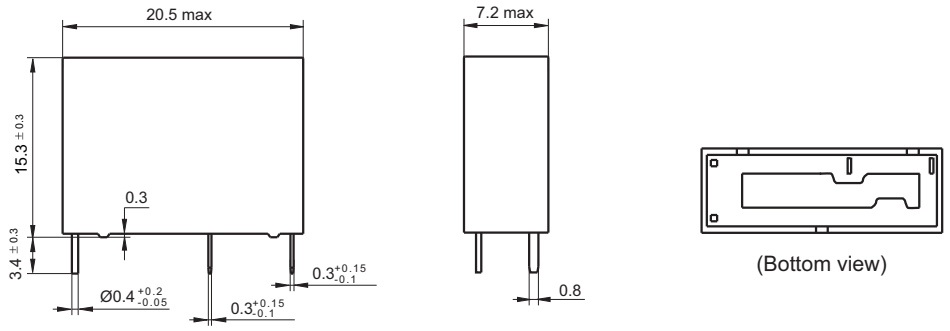

PCB Layout

(Bottom view)

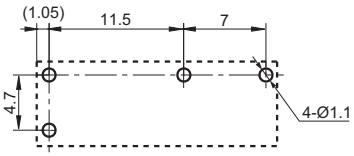

Wiring Diagram

(Bottom view)

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

Outline Dimensions

HF46F-G/□□-H□2□□ (□□□)

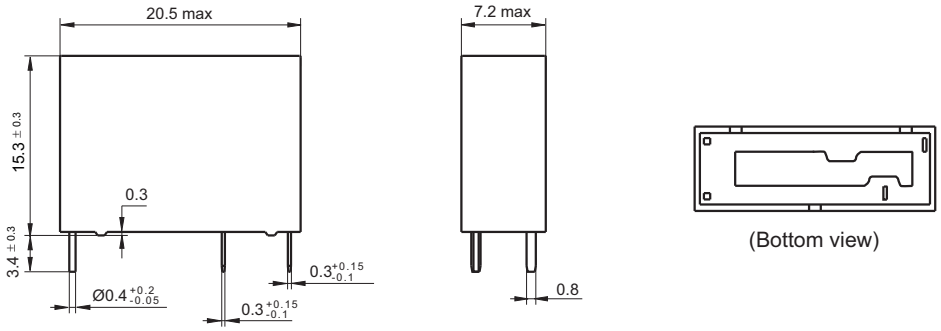

PCB Layout

(Bottom view)

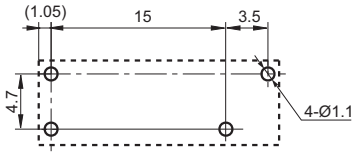

Wiring Diagram

(Bottom view)

Remark: 1) In case of no tolerance shown in outline dimension: outline dimension ≤1mm, tolerance should be ±0.2mm; outline dimension >1mm and ≤5mm, tolerance should be ±0.3mm; outline dimension >5mm, tolerance should be ±0.4mm.

2) The tolerance without indicating for PCB layout is always ±0.1mm.

CHARACTERISTIC CURVES

ENDURANCE CURVE

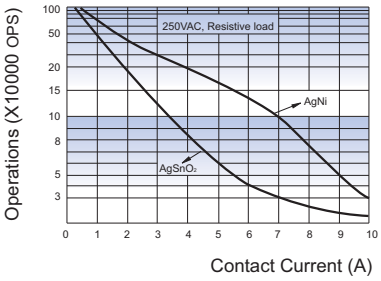

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.