DRAWINGS

FIG. 1

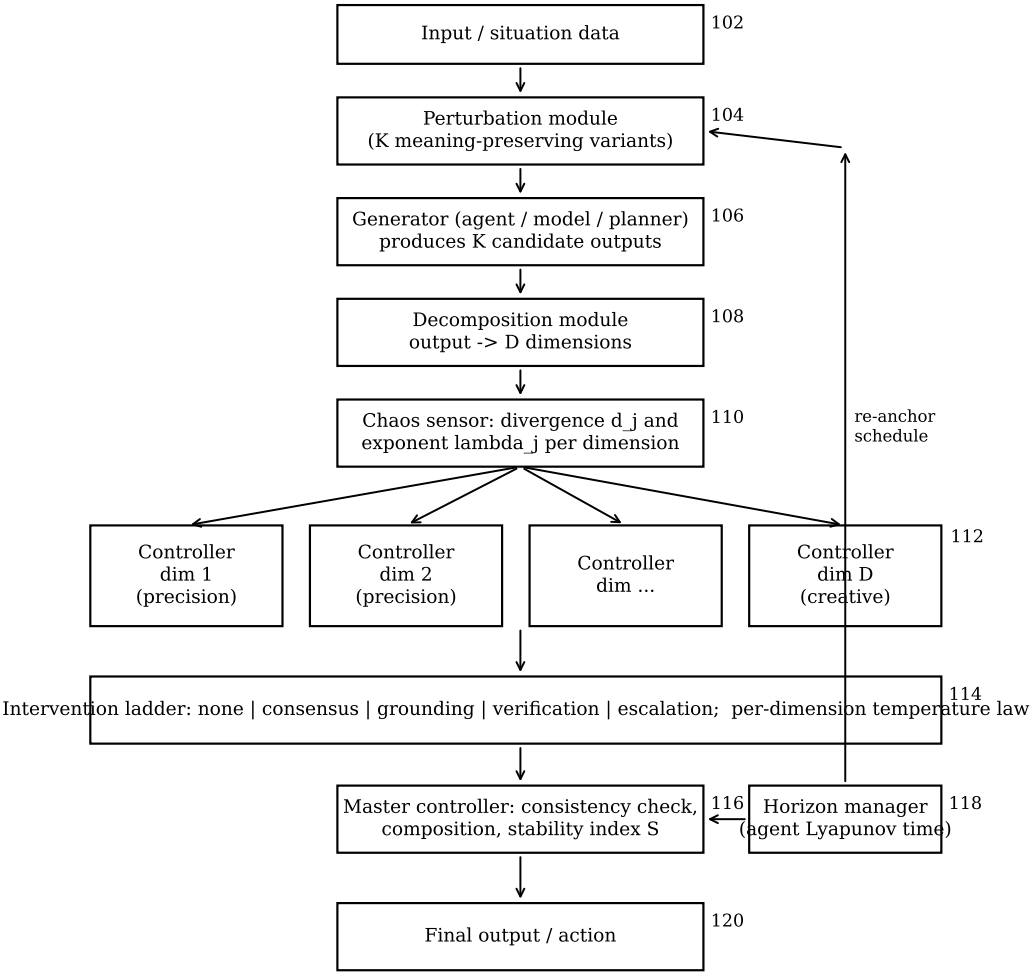


FIG. 2

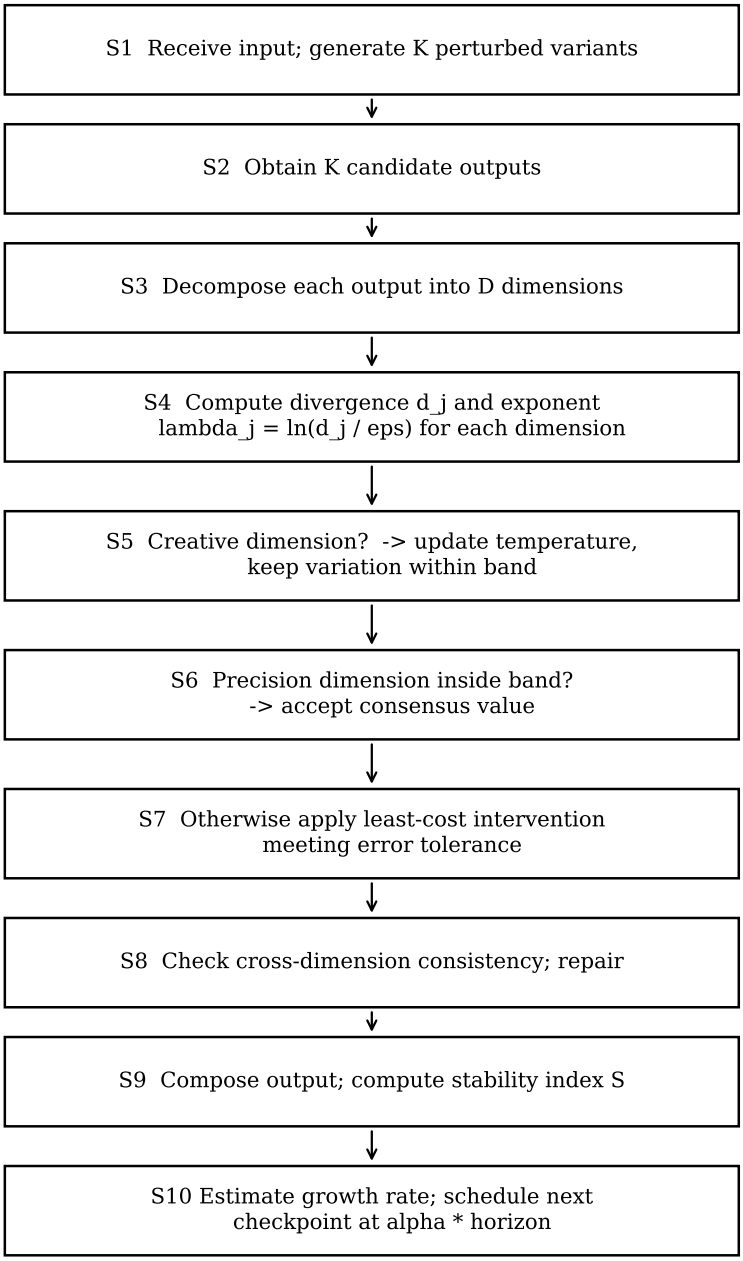

S1 Receive input; generate K perturbed variants
S2 Obtain K candidate outputs
S3 Decompose each output into D dimensions
S4 Compute divergence d_j and exponent lambda_j = ln(d_j / eps) for each dimension
S5 Creative dimension? -> update temperature, keep variation within band
S6 Precision dimension inside band? -> accept consensus value
S7 Otherwise apply least-cost intervention meeting error tolerance
S8 Check cross-dimension consistency; repair
S9 Compose output; compute stability index S
S10 Estimate growth rate; schedule next checkpoint at alpha * horizon

FIG. 3

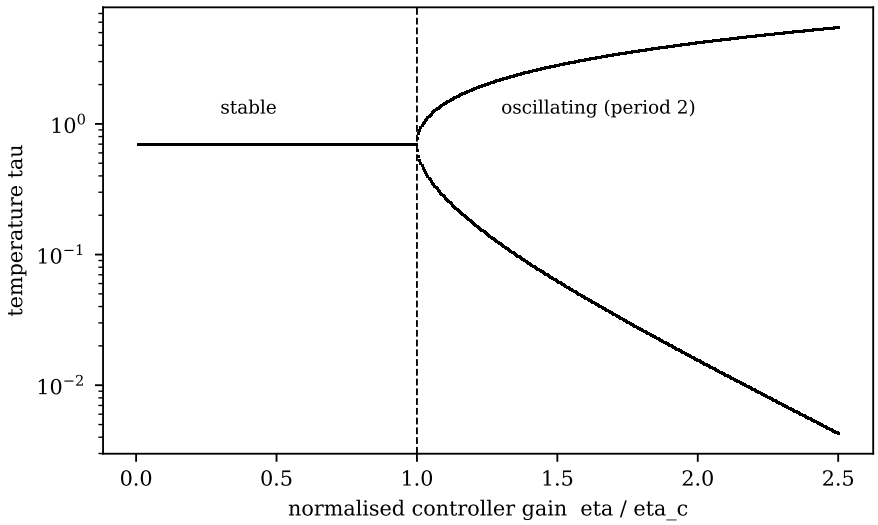

stable
oscillating (period 2)
temperature tau
10^0
10^{-1}
10^{-2}
0.0
0.5
1.0
1.5
2.0
2.5
normalised controller gain eta / eta_c

FIG. 5

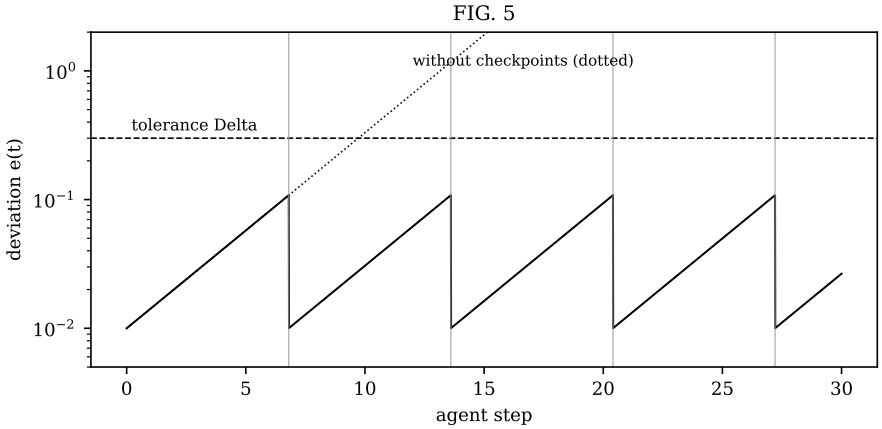
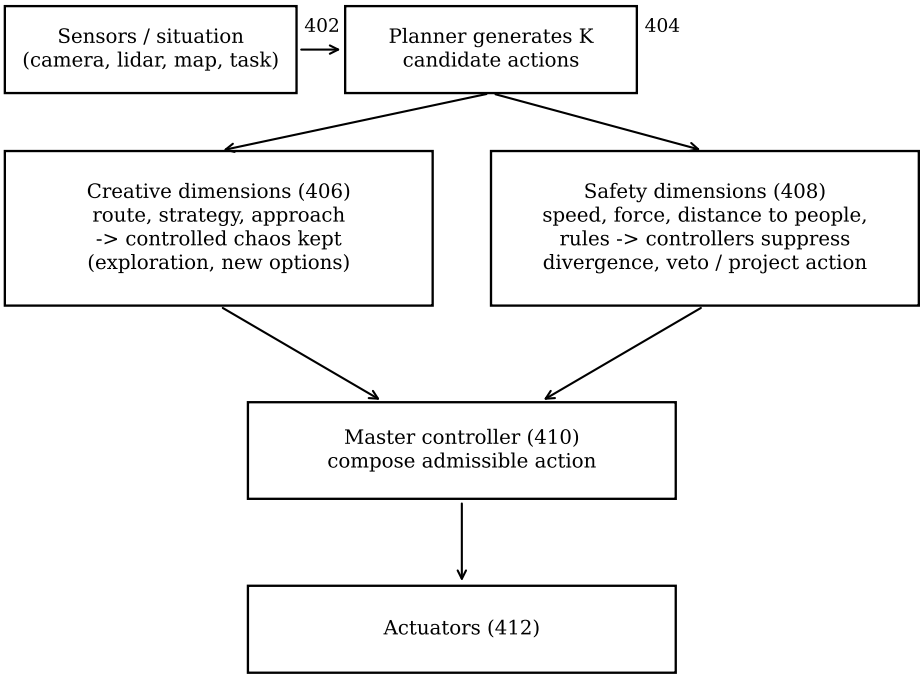

without checkpoints (dotted)
tolerance Delta
deviation e(t)
10^0
10^{-1}
10^{-2}
0
5
10
15
20
25
30
agent step

FIG. 4



Signature: _____

KUHAN K

Applicant