WOODELLO CLEAR VARNISH

WOODELLO™
FACTORIES TO HOMES

Protective Gloss Finish For Wood

PRODUCT OVERVIEW

Woodello Clear Varnish is a high-quality transparent protective coating designed to enhance the natural beauty of wood while providing a durable, glossy finish. It forms a tough protective layer that protects wooden surfaces from moisture, stains, and everyday wear while maintaining the natural wood grain appearance.

Ideal for:

- Wooden Furniture
- Doors & Windows
- Cabinets
- Wooden Panels
- Decorative Wooden Surfaces





PRODUCT CODE - 001

KEY FEATURES

Superior Durability
Long-lasting coating that protects furniture from everyday wear.

Excellent Gloss Retention
Maintains shine and beauty for years.

Easy Application
Can be applied by spray or brush.


Interior & Exterior Compatibility
Suitable for multiple wooden applications.

Smooth Premium Finish
Delivers a professional furniture-grade coating.

AVAILABLE PACKS

WOODELLO CLEAR VARNISH

Gloss - 200 ml, 500ml, 1L & 4L

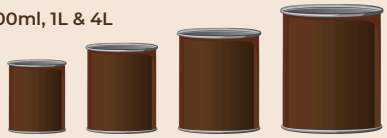




COLOURS AVAILABLE

Clear
Available in a range of 8+ attractive Woodello Wood Stain shades for Interior and Exterior applications to enhance or customise the natural beauty of wood.

COVERAGE

Approximate coverage:
12 – 15 sq. meter / litre / coat
(on smooth sanded wooden surface using spray)



*Coverage may vary depending on surface condition and application method.

AVAILABLE FINISHES

- **Gloss Finish**

(Compatible with Woodello Wood Stains for customized colour effects.)



Gloss


HOW TO APPLY

SURFACE PREPARATION







SANDING & INSULATING:
Sand the wooden surface along the grain using sandpaper no. 180, followed by 320 or 400 grit to achieve a smooth surface. Wipe the surface to remove loose dust particles.





DENT FILLING:
If the surface has dents or cracks, apply Woodello Wood Filler using a putty knife over the affected area and level the surface properly.





STAINING:
For colouring, apply Woodello Wood Stains for Interiors or Exteriors using the ragging method. Allow the stain to dry for 30–120 minutes before applying further coats.

Registered Office: Marudhar Chemicals, G1-42, Boranada Industrial Park, Boranada, Jodhpur, Rajasthan – 342012, India. For feedback or product enquiries, please contact our Customer Care Manager at +91-291-2741060 or email support@marudharchemicals.com. You can also visit our website at www.woodello.in for more information.

Version No. WE01/03/2026. This datasheet supersedes all previous versions. © Marudhar Chemicals. All rights reserved. Terms and conditions apply.
Please refer to the product warranty document for detailed information.

WOODELLO™
FACTORIES TO HOMES

APPLICATION SYSTEM AND MIXING DETAILS

APPLICATION	CODE	WOODELLO THINNER	% DILUTION (BY VOLUME)	APPLICATION VISCOSITY (SEC)	RECOATING PERIOD (HRS.)
STEP 1 Woodello Clear Varnish Gloss - First Coat (Spray/Brush)	001	Woodello Multipurpose Thinner	Spray 20–25 Brush 0–5	Spray 20–25 Brush 30–55	24 hours
STEP 2 Sanding	Sand the surface with sand paper 320 or 400 and wipe clean				
STEP 3 Woodello Clear Varnish Gloss - Second Coat (Spray/Brush)	001	Woodello Multipurpose Thinner	Spray 20–25 Brush 0–5	Spray 20–25 Brush 30–55	24 hours
STEP 4 Sanding	Sand the surface with sand paper 320 or 400 and wipe clean (Apply third coat if required before top coat)				

Note: If required, apply Woodello Wood Stain on the sanded wooden surface using the ragging method and allow approximately 30 minutes drying time before applying Woodello Clear Varnish. For better surface sealing and a smoother finish, Woodello NC Sanding Sealer may be used as an undercoat before varnish application. Do not store Woodello Clear Varnish in a half-filled container to avoid skin formation; transfer the product to a smaller container if necessary and keep the container tightly closed after use. Ensure the coating material is free from contamination such as oil, grease, or wax, and avoid sanding with steel wool between coats. The recoating time mentioned is based on 30°C temperature and 75% relative humidity and may vary under different environmental conditions. Recommended spray air pressure is 2.0–2.5 kg/cm², viscosity is measured using a Ford Cup B4 at 30°C, and Woodello Multi-Purpose Thinner should be used for dilution and cleaning as recommended.

ADDITIONAL INFORMATION

POST APPLICATION CARE

If coating material accidentally spills on tiles or metal surfaces, clean immediately using Woodello Multi-Purpose Thinner and wipe with a clean cloth. If stains become difficult to remove, apply thinner on the affected area and gently wipe or scrape the surface. During spraying or brushing, surrounding areas should be properly masked or protected to avoid unwanted stains on adjacent wood, walls, or coated surfaces.

PRODUCT SPECIFICATIONS

Drying Time:
- Surface Dry: Approx. 30–60 minutes
- Tack Free: Approx. 3–4 hours

Gloss Level:
- Gloss Finish: Minimum 80%
- Silk Matt Finish: 20–35% (Measured at 60° Gloss Meter)

Flash Point:
- Above 30°C

Stability of Thinned Material:
- The prepared mixture should be used within 8–10 hours.

Shelf Life:
- Up to 3 years from the date of manufacture when stored in tightly closed containers away from direct sunlight and excessive heat.

APPLICATION RECOMMENDATIONS

For best results, apply Woodello Clear Varnish at temperatures between 20°C and 40°C and with relative humidity below 75%. Do not over-thin the material and always follow the recommended dilution ratio using Woodello Multi-Purpose Thinner. Stir well and strain before application. Select the appropriate thinner percentage depending on climatic conditions. In high temperatures, using a slow-evaporation thinner helps achieve better leveling and a smoother finish.

SAFETY INFORMATION

Refer to the Material Safety Data Sheet (MSDS) for detailed safety instructions while handling Woodello Clear Varnish. Store the product in a cool, well-ventilated area away from ignition sources and open flames. Use protective equipment such as gloves, safety goggles, and face masks during application. Avoid contact with eyes and skin; in case of contact, wash immediately with soap and plenty of water. If inhaled, move to fresh air and seek medical attention if discomfort persists.
This product contains no added Lead, Mercury, or Chromium compounds and is flammable. Dispose of leftover paint and empty containers responsibly through authorized recycling or waste management agencies.

Registered Office: Marudhar Chemicals, G1-42, Boranada Industrial Park, Boranada, Jodhpur, Rajasthan – 342012, India. For feedback or product enquiries, please contact our Customer Care Manager at +91-291-2741060 or email support@marudharchemicals.com. You can also visit our website at www.woodello.in for more information.

Version No. WE01/03/2026. This datasheet supersedes all previous versions. © Marudhar Chemicals. All rights reserved. Terms and conditions apply.
Please refer to the product warranty document for detailed information.

WOODELLO™ FACTORIES TO HOMES