WOODELLO 1K PU

WOODELLO™
FACTORIES TO HOMES

Premium Protection For Every Wood Surface

PRODUCT OVERVIEW

Woodello 1K PU is a polyurethane-modified clear coating designed to provide a smooth, durable, and protective finish for wooden surfaces. It enhances the natural beauty of wood while providing good gloss retention, hardness, and resistance for everyday use. Suitable for both interior and exterior wooden furniture.

Ideal for:

- Furniture
- Doors & Window Frames
- Cabinets & Wardrobes
- Interior Wooden Panels
- Decorative Wooden Surfaces





PRODUCT CODE 005

KEY FEATURES

Superior Durability
Long-lasting coating that protects furniture from everyday wear.

Excellent Gloss Retention
Maintains shine and beauty for years.


Easy Application
Can be applied by spray or brush.

Interior & Exterior Compatibility
Suitable for multiple wooden applications.

Smooth Premium Finish
Delivers a professional furniture-grade coating.

AVAILABLE PACKS

WOODELLO 1k PU
Matt - 200 ml, 500ml, 1L, 4L & 20L
Gloss - 200 ml, 500ml, 1L, 4L & 20L

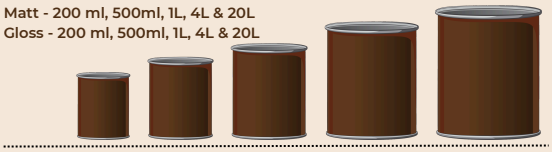




COLOURS AVAILABLE

Clear
Available in a range of 8+ attractive Woodello Wood Stain shades for Interior and Exterior applications to enhance or customise the natural beauty of wood.

COVERAGE

Approximate coverage:
15 – 18 sq. meter / litre / coat
(on smooth sanded wooden surface using spray)



*Coverage may vary depending on surface condition and application method.

AVAILABLE FINISHES

- Gloss Finish
- Matt Finish

(Compatible with Woodello Wood Stains for customized colour effects.)




HOW TO APPLY


SURFACE PREPARATION



SANDING & INSULATING:
Sand the wooden surface along the grain using sandpaper no. 180, followed by 320 or 400 grit to achieve a smooth surface. Wipe the surface to remove loose dust particles.

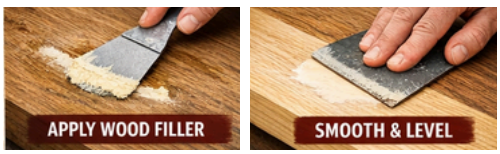

DENT FILLING:
If the surface has dents or cracks, apply Woodello Wood Filler using a putty knife over the affected area and level the surface properly.

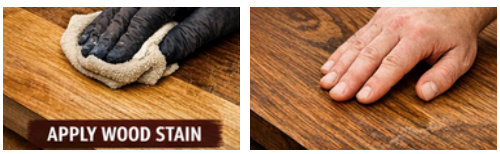

STAINING:
For colouring, apply Woodello Wood Stains for Interiors or Exteriors using the ragging method. Allow the stain to dry for 30–120 minutes before applying further coats.

Registered Office: Marudhar Chemicals, G1-42, Boranada Industrial Park, Boranada, Jodhpur, Rajasthan – 342012, India. For feedback or product enquiries, please contact our Customer Care Manager at +91-291-2741060 or email support@marudharchemicals.com. You can also visit our website at www.woodello.in for more information.

Version No. WE01/03/2026. This datasheet supersedes all previous versions. © Marudhar Chemicals. All rights reserved. Terms and conditions apply.
Please refer to the product warranty document for detailed information.

WOODELLO™
FACTORIES TO HOMES

APPLICATION SYSTEM AND MIXING DETAILS

APPLICATION	CODE	WOODELLO THINNER	% DILUTION (BY VOLUME)	APPLICATION VISCOSITY (SEC)	RECOATING PERIOD (HRS.)
STEP 1 Woodello 1k PU Matt/Gloss - First Coat (Spray/Brush)	005	Woodello PU Thinner	Spray 20–25 Brush 0–5	Spray 20–25 Brush 30–55	24 hours
STEP 2 Sanding	Sand the surface with sand paper 320 or 400 and wipe clean				
STEP 3 Woodello 1k PU Matt/Gloss - Second Coat (Spray/Brush)	005	Woodello PU Thinner	Spray 20–25 Brush 0–5	Spray 20–25 Brush 30–55	24 hours
STEP 4 Sanding	Sand the surface with sand paper 320 or 400 and wipe clean (Apply third coat if required before top coat)				

Note: If required, apply Woodello Wood Stain on the sanded wooden surface using the ragging method and allow about 30 minutes drying time before applying Woodello 1K PU. For better surface sealing, Woodello NC Sanding Sealer may be used as an undercoat. Do not store Woodello 1K PU in a half-filled container to avoid skin formation; transfer the product to a smaller container if necessary and keep the container tightly closed after use. Woodello Wood Stains should not be mixed directly with Woodello 1K PU. Ensure the coating material is free from contamination such as oil, grease, or varnish, and avoid sanding with steel wool between coats. Recoat time mentioned is based on 30°C temperature and 75% relative humidity and may vary under different environmental conditions. Recommended spray air pressure is 2.2–2.8 kg/cm², viscosity is measured using a Ford Cup B4 at 30°C, and Woodello PU Thinner should be used for dilution and cleaning as recommended.

ADDITIONAL INFORMATION

POST APPLICATION CARE

If coating material accidentally spills on tiles or metal surfaces, clean immediately using Woodello Multi-Purpose Thinner and wipe with a clean cloth. If stains become difficult to remove, apply thinner on the affected area and gently wipe or scrape the surface. During spraying or brushing, surrounding areas should be properly masked to avoid unwanted stains on adjacent wood, walls, or coated surfaces.

PRODUCT SPECIFICATIONS

Drying Time:
- Surface Dry: Approx. 30–60 minutes
- Tack Free: Approx. 3–4 hours

Gloss Level:
- Gloss Finish: Minimum 80%
- Silk Matt Finish: 20–35% (Measured at 60° Gloss Meter)

Flash Point:
- Above 30°C

Stability of Thinned Material:
- The prepared mixture should be used within 8–10 hours.

Shelf Life:
- Up to 3 years from the date of manufacture when stored in tightly closed containers away from direct sunlight and excessive heat.

APPLICATION RECOMMENDATIONS

For best performance, Woodello 1K PU should be applied at temperatures between 20°C to 40°C and relative humidity below 75%. Do not over-thin the material and always follow the recommended dilution ratio using Woodello Multi-Purpose Thinner. Stir well and strain before application. Select the appropriate thinner percentage depending on climatic conditions. In high temperatures, use slower evaporation thinner for better leveling and finish.

SAFETY INFORMATION

Refer to the Material Safety Data Sheet (MSDS) for detailed safety instructions while handling Woodello 1K PU. Store the product in a cool, well-ventilated area away from ignition sources and open flames. Use protective equipment such as gloves, safety goggles, and face masks during application. Avoid contact with eyes and skin; in case of contact, wash immediately with soap and plenty of water. If inhaled, move to fresh air and seek medical attention if discomfort persists.
This product contains no added Lead, Mercury, or Chromium compounds and is flammable. Dispose of leftover paint and empty containers responsibly through authorized recycling or waste management agencies.

Registered Office: Marudhar Chemicals, G1-42, Boranada Industrial Park, Boranada, Jodhpur, Rajasthan – 342012, India. For feedback or product enquiries, please contact our Customer Care Manager at +91-291-2741060 or email support@marudharchemicals.com. You can also visit our website at www.woodello.in for more information.

Version No. WE01/03/2026. This datasheet supersedes all previous versions. © Marudhar Chemicals. All rights reserved. Terms and conditions apply.
Please refer to the product warranty document for detailed information.

WOODELLO™ FACTORIES TO HOMES