WOODELLO INDIAN PU


WOODELLO™
FACTORIES TO HOMES

Premium Polyurethane Finish for Interior & Exterior Wood

PRODUCT OVERVIEW

Woodello India PU is a high-performance polyurethane coating system designed to deliver superior durability, excellent gloss retention, and long-lasting protection for wooden surfaces. It enhances the natural beauty of wood while forming a tough protective film that resists scratches, stains, and everyday wear.
Suitable for both interior and exterior furniture applications.
Ideal for:

- Furniture
- Doors & Window Frames
- Cabinets & Wardrobes
- Interior Wooden Panels
- Decorative Wooden Surfaces

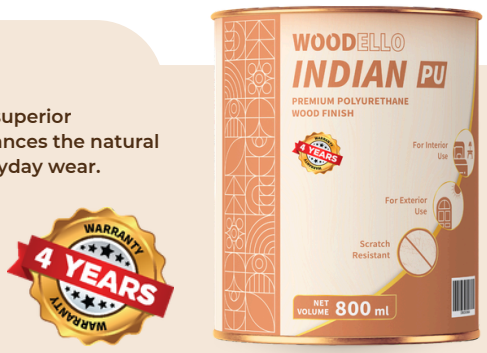

PRODUCT CODE - 008

KEY FEATURES

Superior Durability
Long-lasting coating that protects furniture from everyday wear.

Excellent High Gloss Retention
Maintains shine and beauty for years.

Scratch & Stain Resistance
Protects surfaces from scratches, stains, and heat.


Hard Protective Film
Creates a tough layer that improves furniture life.

Smooth Premium Finish
Delivers a professional furniture-grade coating.

AVAILABLE PACKS

WOODELLO Indian PU + Hardener

Sealer - 1l, 4L & 20L
Matt - 1l, 4L & 20L
Gloss - 1l, 4L & 20L

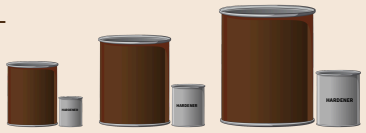


COLOURS AVAILABLE



Clear
Available in a range of 8+ attractive Woodello Wood Stain shades for Interior and Exterior applications to enhance or customise the natural beauty of wood.

COVERAGE

Approximate coverage:
8–9 sq. meter / litre / 1 coat
(on smooth sanded wooden surface using spray)



*Coverage may vary depending on surface condition and application method.

AVAILABLE FINISHES

- High Gloss Finish
- Matt Finish

(Compatible with Woodello Wood Stains for customized colour effects.)




HOW TO APPLY


SURFACE PREPARATION



SANDING & INSULATING:
Sand the wooden surface along the grain using sandpaper no. 180, followed by 320 or 400 grit to achieve a smooth surface. Wipe the surface to remove loose dust particles.

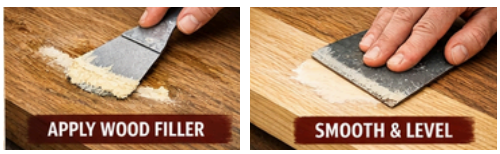

DENT FILLING:
If the surface has dents or cracks, apply Woodello Wood Filler using a putty knife over the affected area and level the surface properly.

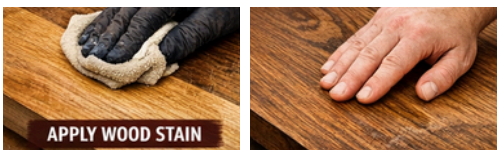

STAINING:
For colouring, apply Woodello Wood Stains for Interiors or Exteriors using the ragging method. Allow the stain to dry for 30–120 minutes before applying further coats.

Registered Office: Marudhar Chemicals, G1-42, Boranada Industrial Park, Boranada, Jodhpur, Rajasthan – 342012, India. For feedback or product enquiries, please contact our Customer Care Manager at +91-291-2741060 or email support@marudharchemicals.com. You can also visit our website at www.woodello.in for more information.

Version No. WE01/03/2026. This datasheet supersedes all previous versions. © Marudhar Chemicals. All rights reserved. Terms and conditions apply.
Please refer to the product warranty document for detailed information.

WOODELLO™
FACTORIES TO HOMES

APPLICATION SYSTEM AND MIXING DETAILS

APPLICATION	CODE	MIXING RATIO BASE : HARDENER	WOODELLO THINNER	% DILUTION (BY VOLUME)	APPLICATION VISCOSITY (SEC)	RECOATING PERIOD (HRS.)
STEP 1 Woodello Indian PU Sealer – First Coat (Spray/Brush)	008	 8 : 2	Woodello PU Thinner	Spray 20–40 Brush 20–40	Spray 20–25 Brush 20–25	Spray 5–6 hrs Brush 8–10 hrs Wet on Wet 15 min
STEP 2 Sanding	Woodello Indian PU Sand the surface with sand paper 320 or 400 and wipe clean					
STEP 3 Woodello Indian PU Sealer – Second Coat (Spray/Brush)	008	 8 : 2	Woodello PU Thinner	Spray 20–40 Brush 20–40	Spray 20–25 Brush 20–25	Spray 5–6 hrs Brush 8–10 hrs Wet on Wet 15 min
STEP 4 Sanding	Sand the surface with sand paper 320 or 400 and wipe clean (Apply third coat if required before top coat)					
STEP 5 Woodello Indian PU Matt / Gloss – First Coat	008	 8 : 2	Woodello PU Thinner	Spray 20–40 Brush 20–40	Spray 20–25 Brush 20–25	Spray 5–6 hrs Brush 8–10 hrs
STEP 6 Sanding	Woodello Indian PU Sand the surface with sand paper 320 or 400 and wipe clean					
STEP 7 Woodello Indian PU Matt / Gloss – Second Coat	008	 8 : 2	Woodello PU Thinner	Spray 20–40 Brush 20–40	Spray 20–25 Brush 20–25	Spray 5–6 hrs Brush 8–10 hrs

Note: Woodello Melamine base should be thoroughly stirred and mixed with the recommended hardener and thinner in the specified ratio before application. Matt and Gloss finishes may be intermixed to achieve the desired sheen level. Ensure the product is free from contamination, such as oil or varnish, and avoid sanding with steel wool between coats. The base and hardener of this 2-pack system should ideally be consumed within one week of opening and containers must be tightly closed after use to prevent moisture contamination. In case of physical damage, such as cuts or dents on the coated surface, repair the affected area by applying fresh coats of Woodello Melamine. Recoat times are based on 30°C temperature and 75% relative humidity and may vary under different conditions. Use only Woodello Melamine Sealer or Top Coat for wet-on-wet application. Recommended spray pressure is 2.2–2.8 kg/cm² and viscosity is measured using a Ford Cup B4 at 30°C.

ADDITIONAL INFORMATION

POST APPLICATION CARE

If coating material spills on tiles or metal surfaces, clean immediately using Woodello PU Thinner or suitable cleaning thinner and wipe with a clean cloth. If stains become difficult to remove, apply thinner on the affected area and gently wipe or scrape the surface. During spraying or brushing, surrounding areas should be properly masked or protected to prevent stains on adjacent wood, walls, or coated surfaces.

PRODUCT SPECIFICATIONS

Drying Time:
- Surface Dry: Approx. 20 minutes
- Tack Free: Approx. 2 hours

Gloss Level:
- Gloss Finish: Minimum 90%
- Matt Finish: 10–15% (measured at 60° gloss meter)

Flash Point:
- Gloss & Matt: Approx. 27°C
- Sealer: Approx. 31°C

Stability of Thinned Material:
- Use the prepared mixture within 8 hours.

Shelf Life:
- Up to 3 years from the date of manufacture when stored in a tightly closed container away from direct sunlight and excessive heat.

APPLICATION RECOMMENDATIONS

For best results, apply Woodello India PU at temperatures between 20°C and 40°C and relative humidity below 75%. Always follow the recommended mixing ratio of Base and Hardener and avoid excessive thinning. Stir well and strain before use. Select the appropriate PU thinner and dilution percentage depending on climatic conditions. For higher temperatures, use slow-drying PU thinner to achieve better leveling and finish.

SAFETY INFORMATION

Refer to the Material Safety Data Sheet (MSDS) for detailed handling and safety instructions. Store the product in a cool, well-ventilated area away from ignition sources. Use protective equipment such as gloves, safety goggles, and masks during application. Avoid direct contact with eyes and skin; if contact occurs, wash immediately with soap and plenty of water. In case of inhalation, move to fresh air and seek medical attention if discomfort continues.

This product contains no added Lead, Mercury, or Chromium compounds and is flammable. Dispose of leftover paint or empty containers responsibly through authorized recycling or waste management agencies.

ays follow the recommended mixing ratio. Stir well and strain before use. Select the appropriate thinner and dilution percentage depending on climatic conditions. For higher temperatures, a slow-drying thinner is recommended for a better finish and leveling.

Registered Office: Marudhar Chemicals, G1-42, Boranada Industrial Park, Boranada, Jodhpur, Rajasthan – 342012, India. For feedback or product enquiries, please contact our Customer Care Manager at +91-291-2741060 or email support@marudharchemicals.com. You can also visit our website at www.woodello.in for more information.

Version No. WE01/03/2026. This datasheet supersedes all previous versions. © Marudhar Chemicals. All rights reserved. Terms and conditions apply.
Please refer to the product warranty document for detailed information.

WOODELLO™ FACTORIES TO HOMES