WOODELLO WATER BASED PU

WOODELLO™
FACTORIES TO HOMES

Premium Protection For Every Wood Surface

PRODUCT OVERVIEW

Woodello Water-Based PU is a premium, eco-friendly coating that enhances and protects wooden surfaces while preserving the natural wood grain. It provides a clear, smooth finish with excellent durability, scratch and stain resistance, low odour, and easy application for both interior and exterior use.

Ideal for:

- Furniture
- Doors & Windows
- Cabinets
- Interior Wood Panels
- Exterior Wooden Surfaces
- Decorative Wooden Items



PRODUCT CODE 010

KEY FEATURES

UV Resistant Protection
Advanced UV protection helps prevent yellowing and protects wood from sunlight damage.

Excellent Gloss Retention
Maintains shine and beauty for years.

Easy Application
Can be applied by spray or brush.


Interior & Exterior Compatibility
Suitable for multiple wooden applications.

Smooth Premium Finish
Delivers a professional furniture-grade coating.


AVAILABLE PACKS

WOODELLO WATER BASED PU

Matt - 1L & 4L
Gloss - 1L & 4L

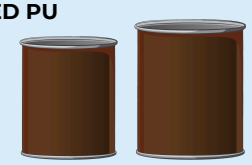

COLOURS AVAILABLE



Clear
Available in a range of 8+ attractive Woodello Wood Stain shades for Interior and Exterior applications to enhance or customise the natural beauty of wood.

COVERAGE

Approximate coverage:
12 – 14 sq. meter / litre / coat
(on smooth sanded wooden surface using spray)



*Coverage may vary depending on surface condition and application method.

AVAILABLE FINISHES

- **Gloss Finish**
- **Matt Finish**

(Compatible with Woodello Wood Stains for customized colour effects.)




HOW TO APPLY


SURFACE PREPARATION



SANDING & INSULATING:
Sand the wooden surface along the grain using sandpaper no. 180, followed by 320 or 400 grit to achieve a smooth surface. Wipe the surface to remove loose dust particles.

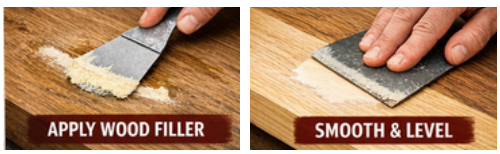

DENT FILLING:
If the surface has dents or cracks, apply Woodello Wood Filler using a putty knife over the affected area and level the surface properly.

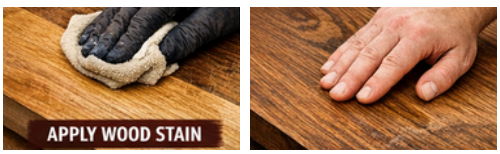

STAINING:
For colouring, apply Woodello Wood Stains for Interiors or Exteriors using the ragging method. Allow the stain to dry for 30–120 minutes before applying further coats.

Registered Office: Marudhar Chemicals, G1-42, Boranada Industrial Park, Boranada, Jodhpur, Rajasthan – 342012, India. For feedback or product enquiries, please contact our Customer Care Manager at +91-291-2741060 or email support@marudharchemicals.com. You can also visit our website at www.woodello.in for more information.

Version No. WE01/03/2026. This datasheet supersedes all previous versions. © Marudhar Chemicals. All rights reserved. Terms and conditions apply.
Please refer to the product warranty document for detailed information.

WOODELLO™
FACTORIES TO HOMES

APPLICATION SYSTEM AND MIXING DETAILS

APPLICATION	CODE	WOODELLO THINNER	% DILUTION (BY VOLUME)	APPLICATION VISCOSITY (SEC)	RECOATING PERIOD (HRS.)
STEP 1 Woodello Water Base PU Sealer - First Coat (Spray/Brush/Roller)	010	Water	Spray 05-15 Brush 05-15	Spray 20–25 Brush 30–55	5 hours
STEP 2 Sanding	Sand the surface with sand paper 320 or 400 and wipe clean				
STEP 3 Woodello Water Base PU Sealer - Second Coat (Spray/Brush)	010	Water	Spray 05-15 Brush 05-15	Spray 20–25 Brush 30–55	5 hours
STEP 4 Sanding	Sand the surface with sand paper 320 or 400 and wipe clean (Apply third coat if required before top coat)				
STEP 5 Woodello Water Base PU Matt/Gloss - First Coat (Spray/Brush)	010	Water	Spray 05-10 Brush 05-10	Spray 20–25 Brush 30–55	5 hours
STEP 6 Sanding	Sand the surface with sand paper 320 or 400 and wipe clean (Apply third coat if required before top coat)				
STEP 7 Woodello Water Base PU Matt/Gloss - Second Coat (Spray/Brush)	010	Water	Spray 05-10 Brush 05-10	Spray 20–25 Brush 30–55	5 hours

Note: If required, apply Woodello Water Based Wood Stain on the sanded wooden surface using a ragging method and allow approximately 30–45 minutes drying time before applying Woodello Water Based PU. For improved sealing and a smoother finish, Woodello Water-Based Sanding Sealer may be used as an undercoat. Ensure the surface is properly sanded, clean, and free from dust, oil, grease, or wax before application. Stir the material thoroughly before use and avoid contamination during application. Recoat time mentioned is based on 30°C temperature and 75% relative humidity and may vary depending on environmental conditions. Apply using spray, brush, or roller for best results and maintain proper ventilation during application.

ADDITIONAL INFORMATION

POST APPLICATION CARE

If coating material accidentally spills on tiles, glass, or metal surfaces, clean immediately with a clean damp cloth or mild cleaning solution before the coating dries. If stains become difficult to remove, gently wipe using a suitable cleaning agent. During spraying or brushing, surrounding areas should be properly masked or protected to prevent unwanted stains on adjacent wood, walls, or coated surfaces.

PRODUCT SPECIFICATIONS

Drying Time:
- Surface Dry: Approx. 30 minutes
- Recoating Time: 2–3 hours

Gloss Level:
- Gloss Finish: Minimum 80%
- Matt Finish: 10–20% (Measured at 60° Gloss Meter)

Flash Point:
- Non-flammable (Water-Based System)

Stability of Thinned Material:
- Use the diluted material within 6–8 hours.

Shelf Life:
- Up to 2 years from the date of manufacture when stored in tightly closed containers away from direct sunlight and freezing temperatures.

APPLICATION RECOMMENDATIONS

For best results, apply Woodello Water Based PU at temperatures between 15°C and 35°C with relative humidity below 80%. Ensure the wooden surface is properly sanded using 320–400 grit sandpaper and cleaned before application. Stir well before use and strain if necessary. Apply thin and uniform coats using spray, brush, or roller. Allow proper drying between coats and lightly sand between coats for smoother finishing. Avoid application under extremely humid or cold conditions to ensure proper curing and film formation.

SAFETY INFORMATION

Refer to the Material Safety Data Sheet (MSDS) for detailed safety instructions while handling the product. Store the material in a cool, dry, and well-ventilated area away from direct sunlight. Use protective equipment such as gloves, safety glasses, and face masks during application. Avoid direct contact with eyes and skin; in case of contact, wash immediately with soap and plenty of water. Do not ingest the product. Keep out of reach of children. Dispose of leftover material or containers responsibly through authorized recycling or waste management agencies.

Registered Office: Marudhar Chemicals, G1-42, Boranada Industrial Park, Boranada, Jodhpur, Rajasthan – 342012, India. For feedback or product enquiries, please contact our Customer Care Manager at +91-291-2741060 or email support@marudharchemicals.com. You can also visit our website at www.woodello.in for more information.

Version No. WE01/03/2026. This datasheet supersedes all previous versions. © Marudhar Chemicals. All rights reserved. Terms and conditions apply.
Please refer to the product warranty document for detailed information.

WOODELLO™ FACTORIES TO HOMES