WOODELLO NC SANDING SEALER & LACQUER

WOODELLO™
FACTORIES TO HOMES

Professional Wood Finishing System

PRODUCT OVERVIEW

Woodello NC Sanding Sealer
A high-quality nitrocellulose-based sealer designed to fill wood pores and create a smooth base before applying the final finish. It improves adhesion, enhances smoothness, and ensures better topcoat performance.

Woodello NC Lacquer
A premium clear lacquer that enhances the natural appearance of wood while providing a smooth, protective finish with excellent clarity and quick drying properties.





PRODUCT CODE 006

KEY FEATURES

Superior Durability
Long-lasting coating that protects furniture from everyday wear.

Excellent Gloss Retention
Maintains shine and beauty for years.


Easy Application
Can be applied by spray or brush.

Interior & Exterior Compatibility
Suitable for multiple wooden applications.

Smooth Premium Finish
Delivers a professional furniture-grade coating.

AVAILABLE PACKS

WOODELLO NC SANDING SEALER & LACQUER
500ml, 1L, 4L & 20L

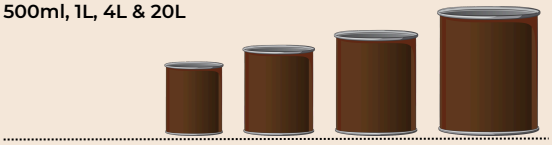


COLOURS AVAILABLE



Clear
Available in a range of 8+ attractive Woodello Wood Stain shades for Interior and Exterior applications to enhance or customise the natural beauty of wood.

COVERAGE

Approximate coverage:
08 – 12 sq. meter / litre / coat
(on smooth sanded wooden surface using spray)



*Coverage may vary depending on surface condition and application method.

AVAILABLE FINISHES

- Natural Finish
- Excellent Gloss

(Compatible with Woodello Wood Stains for customized colour effects.)


Natural Finish


Excellent Gloss


HOW TO APPLY

SURFACE PREPARATION







SANDING & INSULATING:
Sand the wooden surface along the grain using sandpaper no. 180, followed by 320 or 400 grit to achieve a smooth surface. Wipe the surface to remove loose dust particles.





DENT FILLING:
If the surface has dents or cracks, apply Woodello Wood Filler using a putty knife over the affected area and level the surface properly.





STAINING:
For colouring, apply Woodello Wood Stains for Interiors or Exteriors using the ragging method. Allow the stain to dry for 30–120 minutes before applying further coats.

Registered Office: Marudhar Chemicals, G1-42, Boranada Industrial Park, Boranada, Jodhpur, Rajasthan – 342012, India. For feedback or product enquiries, please contact our Customer Care Manager at +91-291-2741060 or email support@marudharchemicals.com. You can also visit our website at www.woodello.in for more information.

Version No. WE01/03/2026. This datasheet supersedes all previous versions. © Marudhar Chemicals. All rights reserved. Terms and conditions apply.
Please refer to the product warranty document for detailed information.

WOODELLO™
FACTORIES TO HOMES

APPLICATION SYSTEM AND MIXING DETAILS

APPLICATION	CODE	WOODELLO THINNER	% DILUTION (BY VOLUME)	APPLICATION VISCOSITY (SEC)	RECOATING PERIOD (HRS.)
STEP 1 Woodello NC Sanding Sealer - First Coat (Spray/Brush/Roller)	006	NC Thinner	Spray 80-100 Brush 40-50	Spray 18-22 Brush 25-30	20–30 minutes between coats
STEP 2 Sanding	Sand the surface with sand paper 320 or 400 and wipe clean				
STEP 3 Woodello NC Sanding Sealer - Second Coat (Spray/Brush)	006	NC Thinner	Spray 80-100 Brush 40-50	Spray 18-22 Brush 25-30	20–30 minutes between coats
STEP 4 Sanding	Sand the surface with sand paper 320 or 400 and wipe clean (Apply third coat if required before top coat)				
STEP 5 Woodello NC Lacquer - First Coat (Spray/Brush)	006	NC Thinner	Spray 80-100 Brush 40-50	Spray 18-22 Brush 25-30	20–30 minutes between coats
STEP 6 Sanding	Sand the surface with sand paper 320 or 400 and wipe clean (Apply third coat if required before top coat)				
STEP 7 Woodello NC Lacquer - Second Coat (Spray/Brush)	006	NC Thinner	Spray 80-100 Brush 40-50	Spray 18-22 Brush 25-30	20–30 minutes between coats

Note: Ensure the wooden surface is properly sanded and free from dust, oil, grease, or other contaminants before application. Woodello NC Sanding Sealer should be applied as the base coat to seal the wood pores and improve adhesion of the top coat. Allow proper drying and light sanding before applying Woodello NC Lacquer. Always stir well before use and dilute only with Woodello NC Thinner as recommended. Avoid excessive thinning and ensure containers are tightly closed after use to prevent solvent evaporation and contamination.

ADDITIONAL INFORMATION

POST APPLICATION CARE

If coating material accidentally spills on tiles, metal, or glass surfaces, clean immediately using Woodello NC Thinner and wipe with a clean cloth. If stains become difficult to remove, apply thinner to the affected area and gently wipe or scrape the surface. During spraying or brushing, surrounding areas should be properly masked to avoid unwanted stains on adjacent wood, walls, or finished surfaces.

PRODUCT SPECIFICATIONS

Drying Time:
- Surface Dry: Approx. 10–15 minutes
- Tack Free: Approx. 30–45 minutes

Gloss Level:
- Gloss Finish: Up to 80% (on coated wooden panel at 60° gloss meter)

Flash Point:
- Approx. 25–30°C

Stability of Thinned Material:
- The prepared mixture should be used within 6–8 hours

Shelf Life:
- Up to 3 years from the date of manufacture when stored in tightly closed containers away from direct sunlight and excessive heat.

APPLICATION RECOMMENDATIONS

For best performance, apply Woodello NC Sanding Sealer and NC Lacquer at temperatures between 20°C to 40°C with relative humidity below 75%. Do not over-thin the material and always use Woodello NC Thinner for dilution. Stir well and strain before application. Proper sanding between coats is recommended for a smooth and uniform finish.

SAFETY INFORMATION

Refer to the Material Safety Data Sheet (MSDS) for detailed handling instructions. Store the product in a cool, well-ventilated area away from sources of ignition or fire. Use protective equipment such as gloves, safety goggles, and masks during application. Avoid direct contact with eyes and skin; in case of contact, wash immediately with soap and plenty of water. Do not inhale vapours. This product is flammable, and leftover paint or empty containers should be disposed of responsibly through authorized recycling or waste management agencies.

Registered Office: Marudhar Chemicals, G1-42, Boranada Industrial Park, Boranada, Jodhpur, Rajasthan – 342012, India. For feedback or product enquiries, please contact our Customer Care Manager at +91-291-2741060 or email support@marudharchemicals.com. You can also visit our website at www.woodello.in for more information.

Version No. WE01/03/2026. This datasheet supersedes all previous versions. © Marudhar Chemicals. All rights reserved. Terms and conditions apply.
Please refer to the product warranty document for detailed information.

WOODELLO™ FACTORIES TO HOMES