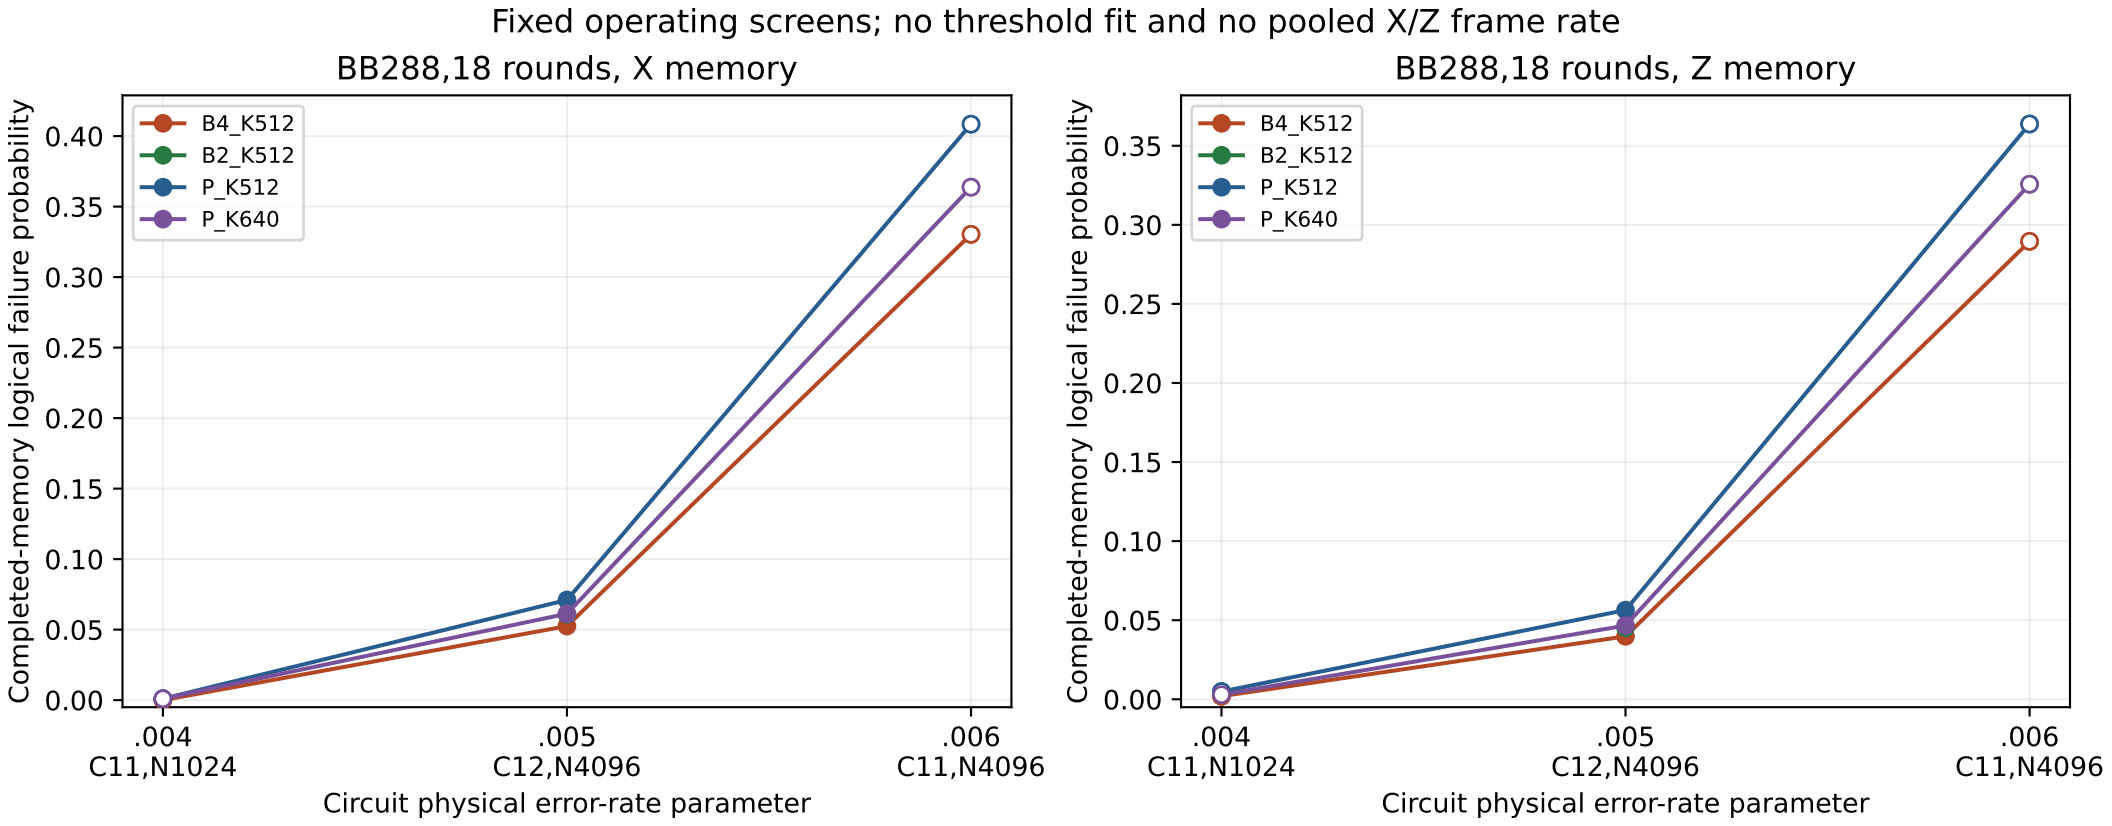
Fixed operating screens; no threshold fit and no pooled X/Z frame rate
BB288,18 rounds, X memory
BB288,18 rounds, Z memory
B4_K512
B2_K512
P_K512
P_K640
Completed-memory logical failure probability
0.00
0.05
0.10
0.15
0.20
0.25
0.30
0.35
0.40
.004
C11,N1024
.005
C12,N4096
.006
C11,N4096
Circuit physical error-rate parameter