



SWIMMING POOL
PRODUCTS



Application:

- a. Swimming pool
- b. Sauna and SPA.
- c. Water park, etc.

Fiberglass side mount sand filter with valve system

Anpow brand sand filter have been using the latest pool filter technology which is suitable for many different weather conditions and have reached many different market standards. The filters are durable, anti-corrosive, UV-resistant and user-friendly. The sand filters are applicable for use in all types of pools such as in-ground pools, in-ground spas, as well as other water features.

Features and advantage - Tank

1. Voluble molding of fiber glass reinforced plastics, corrosion resistant, good abrasion resistance, deforming-proof.
2. Uniquely designed distribution make a stable and even water flow to improve drainage system.
3. Easy to install, maintain free.
4. Outlet turbidity: Less 2FTU
5. Working pre(kpa): 350

Dia (mm)	Inch / Outlet (Inch)	Flow (m ³ /h)	Filtration Area(m ²)	Sand Weight (kg)	Working Pre (kpa)
1200	2.5	42	1.13	560	350
1400	3	56	1.25	730	350
1600	3	100	2.01	1090	350
1800	4	125	2.54	1550	350
2000	6	153	3.14	2125	350



CARTRIDGE FILTER

High quality cartridge element for long life filtration, suitable for spa temperatures. Complete with quality pressure gauge and 63mm water connections.

Code Number	Description
HCCF 25	High quality cartridge Filter & Base with 25 sq.ft 5.5m ³ /hr, 40/50mm solvent connections
HCCF 50	High quality cartridge Filter & Base with 50 sq.ft 11.4m ³ /hr, 40/50mm solvent connections
HCCF 75	High quality cartridge Filter & Base with 75 sq.ft 17.0m ³ /hr, 40/50mm solvent connections
HCCF 100	High quality cartridge Filter & Base with 100 sq.ft 22.9m ³ /hr, 50/63mm solvent connections
HCCF 150	High quality cartridge Filter & Base with 150 sq.ft 33.4m ³ /hr, 50/63mm solvent connections



SIDE MOUNT SAND FILTER WITH MULTIPORT VALVE

Side-Mount Swimming Pool Sand Filters with Multiport Valve Series Anpow is the ideal equipment for swimming pool, sauna and SPA.

Features and advantage - Tank

1. Voluble molding of fiber glass reinforced plastics, corrosion resistant, good abrasion resistance, deforming-proof.
2. Uniquely designed distribution make a stable and even water flow to improve drainage system.
3. Easy to install, maintain free.
4. Outlet turbidity: Less 2FTU

Dia (mm)	Inch / Outlet (Inch)	Flow (m ³ /h)	Filtration Area(m ²)	Sand Weight (kg)	Working Pre (kpa)
525	1.5	12	0.19	90	350
600	1.5	14	0.22	140	350
650	1.5	17	0.32	155	350
700	1.5	19	0.35	165	350
750	1.5	21	0.4	185	350
800	2	24	0.5	200	350
900	2	30	0.64	310	350
1050	2	38	0.88	435	350



Anpow brand top mount sand filter (2 inch)

TOP MOUNT SAND FILTER WITH MULTIPORT VALVE

High strength Swimming Pool top mount Sand Filters Anpow brand top-mount sand filter is the ideal equipment for swimming pool, sauna and SPA.

Features and advantage - Tank

1. Voluble molding of fiber glass reinforced plastics, corrosion resistant, good abrasion resistance, deforming-proof.
2. Uniquely designed distribution make a stable and even water flow to improve drainage system.
3. Easy to install, maintain free.
4. Outlet turbidity: Less 2FTU

Dia (mm)	Inch / Outlet (Inch)	Flow (m ³ /h)	Filtration Area(m ²)	Sand Weight (kg)	Working Pre (kpa)
400	1.5	8	0.13	40	350
450	1.5	10	0.16	75	350
525	1.5	12	0.19	90	350
600	1.5	14	0.22	140	350
650	1.5	17	0.32	155	350
700	2	19	0.35	165	350
750	2	21	0.4	185	350
800	2	24	0.5	200	350
900	2	30	0.64	310	350
1050	2	38	0.88	435	350



AUTOMATIC MULTIPORT VALVE

Filter, backwash, rinse and waste Automatic Backwash – pressure sensitive (factory set @ 1.5 BAR) Pump stops when changing functions Optional Weekly Backwash – programmable 1.5" and 2" valve versions available Can be used on Top or Side Mount valve bodies Automatic Pump switch off during any function change Length of Backwash Time is Adjustable (between 0.5 and 4.0 minutes) Adjustable Rinse Time – 20 or 40 seconds

Code Number	Description
HCMPV150SA	Automatic Multi port valve 1.5" Side Mounted
HCMPV200SA	Automatic Multi port valve 2" Side Mounted
HCMPV300SA	Automatic Multi port valve 3" Side Mounted



Valve Battery

5 valve manual backwash system (unassembled). Each kit includes: 5 x tee pieces, 2 x 90° Elbows, 5 x butterfly valves, 12 x stub flanges, 12 x backing ring, 12 x flat gaskets

Code Number	Description
HCVB90	5 x 90mm Butterfly valve and pipe fittings VB
HCVB110	5 x 110mm Butterfly valve and pipe fittings VB
HCVB125	5 x 125mm Butterfly valve and pipe fittings VB
HCVB160	5 x 160mm Butterfly valve and pipe fittings VB
HCVB200	5 x 200mm Butterfly valve and pipe fittings VB

INTERACTIVE FILTER

The Integrative unit combined with filter, handrail, underwater light, more functions together. Even equipped with 11W constant thermal heater.



MULTI PORT VALVES



Multi port valve to perform different functions in an hydraulic circuit: filtration, emptying, shut off, backwashing, circulation and rinsing of the filter. Its functional design, offers a wide range of possibilities of connection in any installation assuring a perfect sealing and easy operation. When designing and choosing appropriate materials for manufacturing the different Multiport valve components, extreme care has been taken for assuring minimum friction and resistance, maximum security and an attractive finish. Housing, cover and handle are made of ABS

TOP MOUNT MULTI PORT VALVE

Code Number	Description
HCMPV150T	Multi port valve 1.5" Top Mounted
HCMPV200T	Multi port valve 2" Top Mounted



Size: 1/2", 2" and 3"

Material: • High impact ABS (white or black).

Option: • Glass filled NORYL for high pressure applications (75 psi. operating pressure)

Features :

- Choice of socket or threaded (FIP)
- NPT, BSP or JIS threads
- Four piping variations including all open ports
- Two plugs will be supplied with all open port models

SIDE MOUNT MULTI PORT VALVE

Code Number	Description
HCMPV150S	Multi port valve 1.5" Side Mounted
HCMPV200S	Multi port valve 2" Side Mounted
HCMPV250S	Multi port valve 2.5" Side Mounted
HCMPV250SW	Multi port valve 2.5" Side Mounted (Waterco)

FILTER MEDIA

Filter media are the portion of a filtering system that separates unwanted particles from the substance being filtered. This media is more efficient. It can remove up to 30% more material and pollutants than, so saving on backwashing and the resultant water, energy and chemical treatment costs.



Grade - 1

Size: 4/8, Approx. 5.6mm
Packaging: 25kg Bag



Grade - 2

Size: 8/16
Packaging: 25kg Bag



Grade - 3

Size: 16/30/32
Packaging: 25kg Bag

The single media filtration by use of filter sand is widely spread as a general filtering method. However in these days the treated water quality standards are tightened in addition to the deterioration problem of raw water quality arisen from the growth of algae and cryptosporidium, the part of filtration, which is a key point of water purification become more important and performance is required.



Grade - 1

Size: 4/8



Grade - 2

Size: 8/16



Grade - 3

Size: 16/323



DENVER PUMP

Self Priming Built-in pre-filter Polypropylene body Noryl impellor Motor IP55 protection rated 316 stainless steel shaft 2" connections



BIG DENVER PUMP

Big Denver pump range is ideal for smaller commercial applications. Pump body manufactured in fibre-glass and mineral reinforced polypropylene and transparent polycarbonate cover 316 stainless steel shaft Plastic impellor Pre-filter capacity 8 litres IP55 protection rated Suction connection Ø90 and return connection Ø70 (supplied with couplings and metric unions) Self priming at 2m



COMMERCIAL BP RANGE PUMP

Designed with efficiency in mind, these unique centrifugal pumps offer quality, performance and reliability. All models in this range have been designed and developed primarily for the swimming pool industry Designed to circulate large quantities of low pressure water High quality corrosion resistant components Cast iron body Bronze impeller IP55 protection rated Integral strainer box Self priming Stainless steel strainer basket and shaft Mechanically sealed shaft Quality 1500 rpm/3000 rpm motor



COMMERCIAL AIR BLOWER

Air blower housing and the impeller are made of a light Aluminium alloy, whereas the shaft is made of S.S. on which the impeller is mounted and dynamically balanced. Power consumption 100-120/200-240 V single phase and the 200-240/280-440 V three phase . motors at 50/60 Hz for non-stop operation, are manufactured according to the IEC Standards and come with an IP 54 outer protection and an F Class insulation.



COUNTER-CURRENT UNIT

The system is equipped with a 3HP pump to create a counterstream of water which allows you to swim on the spot. The adjustable current means that swimmers of all levels can swim at their own pace for as long as they like. The directional inlet allows a 15-degree inclination in any direction and also features an adjustable air/water mixer for a relaxing bubble massage effect.



COUNTER-CURRENT UNIT

Advance N.D Countercurrent kit made up of:

- Return inlet (air-water) made of polished AISI-316 stainless steel.
- Illuminated ON-OFF and +/- piezoelectric push button made of AISI-316 stainless steel.
- Suction grille with a capacity of 60 m³/h made of polished AISI-316 stainless steel. 5.5 HP pump.
- Flow rate adjustable from 23 m³/h to 50 m³/h thanks to a variable-speed drive.
- Power control cabinet

ABS POOL FITTINGS



HCWIT

Angle / Flow Adjustable ABS Wall Inlet in ABS 2" Outer threaded & 1.5" Inside threaded connections 5-9 m3/hr. WHITE color available and suitable for 6Kg & 10Kg Pipes



HCMD 225 / 300

Square Main Drain-Frame & Grille in ABS 225 x 225mm 20 m3/hr & ABS 300 x 300mm 33 m3/hr.



HCVPT

Vacuum Point in ABS 2" threaded connections, WHITE color available and suitable for 6Kg & 10Kg Pipes



HCMD 450 / 600 SF

Square Main Drain-Frame in SS & grille in ABS 450x450mm 80m3/hr. ABS 600x600mm 132m3/hr.



HCFIT

Adjustable floor inlet in ABS Standard design 2" threaded connections 9m3/hr - 12 m3/hr



HCOFF

Gutter Drain in ABS 50mm Solvent connections 7m3/hr.



HCFIDS

Adjustable floor inlet in ABS Diffuser design 2" Solvent connections 9m3/hr - 12 m3/hr suitable for 6Kg 10Kg Pipes




HCSK15

Skimmer - Square in ABS 15 LTR capacity 5 m3/hr.



HCCMD200

Main drain with anti entrapment grille complete for Concrete Pools 200mm dia, 1 1/2" connections 18m3/hr.



HCOFF250 / 300

Overflow gratings 250 / 300 mm PPG



HCCMD150G

Circular Main Drain-Frame & Grille in ABS 150mm dia 18 m3/hr.

STAINLESS STEEL POOL FITTINGS



HCWISC

Adjustable Wall Inlet in SS
50mm threaded
connections 5m3/hr.



HCVPT

Vacuum point made of
SS 50mm threaded connections



HCFISC

Flow adjustable Floor Inlet
Circle in SS 50mm
threaded connections
9m3/hr.



HCCMD150SS

Circular Main Drain- Frame in
ABS & Grille in SS



HCMD225SS Square Main Drain Frame in ABS & Grille in SS 225x225mm 20m3/hr.

HCMD300SS Square Main Drain Frame & Grille in SS 300x300mm 30m3/hr

HCMD500SS Square Main Drain Frame & Grille in SS 500x500mm 100m3/hr.

POOL BASINE EQUIPMENTS



HCOFF

Gutter Drain in ABS 50mm
Solvent connections 7m3/hr.
HSN CODE 39269099



HCWC

Wall conduit for Fitting 2"
threaded



HCOFFSS

SS Gutter Drain 50mm
threaded connections
7m3/hr.
HSN CODE 73242900

MAINTENANCE ACCESSORIES

**HCWBHR**

18" (460mm) Wall brush- with Polypropylene bristles, Polished Aluminum reinforced back & handle, clip in fastening

**HCABH10**

10"(250mm) Algae brush- SS bristle, clip in fastening- Dark Blue

**HCABHR**

10" (250mm) Algae brush - with SS bristles, Polished Aluminum reinforced back & handle, clip in fastening

**HCABH5**


5"(125mm) Algae brush- SS bristle, clip in fastening- Dark Blue

**HCFNH**

Heavy duty Flat net with 5 Micron mesh, clip in fastening- Dark Blue

**HCFNHR**

Heavy duty Flat Net model with Polypropylene, puncture resistant net, Aluminum frame & handle

**HCDNH**

Heavy duty 15" deep net with 5 Micron mesh, clip in fastening- Dark Blue

**HCDNHR**

Heavy duty Deep Net model with Polypropylene, puncture resistant net, Aluminum frame & handle

**HCFVH350P**

350mm Flexible VAC head with swivel hose connections, clip in fastening, Dark Blue

**HCALVH350**

350mm Anodised Aluminium VAC head-clip in fastening-Silver

HCFVH350R

Heavy duty 350mm Vacuum Head with Multidirectional handle with bottom rolling balls and bristles

HCALVH450

450mm Anodised Aluminium VAC head-clip in fastening-Silver

**HC-TKS**

Test Kit Spare

HC-TK

3Way test kit, PH/CL/BR



HCCHS06 - 6mtr hose

HCCHS09 - 9mtr hose

HCCHS15 - 15mtr hose

HCCHS18 - 18mtr hose

HCCHS25 - 25mtr hose

HCCHS30 - 30mtr hose

**Hc816**

8-16' Telescopic pole with handgrip & clip-in fastening- Corrugated- Silver color

Hc1030

9-27' , 3 part Telescopic pole with handgrip & clip- in fastening- Ribbed- Silver color

Hc412

4'-12' Telescopic pole with handgrip & clip-in fastening- Corrugated- Silver color

HC816R

8-16' Telescopic pole made of Anodised Aluminum tube, with TWIST lock cam, New handle grip, handgrip & clip in fastening

SPA FITTINGS



HCJN5032

Spa nozzles with a flow rate of 4.5 cu.mtr. Water connections: 50mm & air connections: 32mm (BS & ASTM connections available)



HCJN3232

Spa nozzles with a flow rate of 4.5 cu.mtr. Water connections: 32mm & air connections: 32mm



HCCPSPD

Spa suction ABS / Chrome Plated with 1.5" / 2" Elbow connections



HCSPD

Spa suction ABS / Chrome Plated with 1.5" / 2" Straight connections



HCBLN

Air bubbler nozzle-20mm connections



HCAVC

Air volume controller to regulate the air flow in the nozzle



HCPB

Pushbutton ABS with 1" threaded connections



HCPNS

Pneumatic switch for pump control panel to connect the push button.



HCAT

Air Tube Per mtr. (Only Sold in Multiples of 25mtr)

MAINTENANCE ACCESSORIES



HCWBH

18" (450mm) Heavy duty wall brush with poly bristle - Dark blue color



HCWBER

18" (460mm) ECO Wall brush-with Polypropylene bristles, with heavy duty plastic handle, clip in fastening

SS LADDERS & HANDRAILS

Stainless steel pool Ladder with non slip threads , Pinch anchor & Ladder Bumper



Club Ladder


Club ladder with handrails including non slip step.
42mm dia Rails and steps made from 304 stainless steel

HCCL2 - 2 Steps

HCCL3 - 3 steps

HCCL4 - 4 steps

HCCL5 - 5 steps

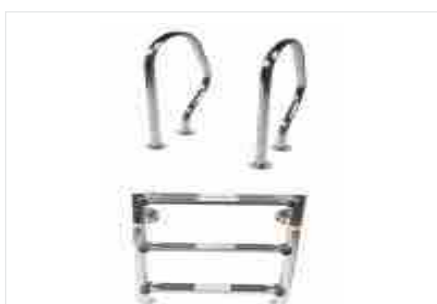

Under cover Ladder

Club ladder with handrails including non slip step.
42mm dia Rails and steps made from 304 stainless steel

HCUCL2 - 2 Steps

HCUCL3 - 3 steps



Hand rail

Hand Rail With Closed Bracket SS 304, 38 mm

HCHR1 - 1 mtr Long

HCHR2 - 2 mtr Long

HCHR3 - 3 mtr Long

HCHR4 - 4 mtr Long



Standard Ladder

Standard ladder with handrails including non slip step.
42mm dia Rails and steps made from 304 stainless steel

HCSTD2 - 2 STEPS

HCSTD3 - 3 STEPS

HCSTD4 - 4 STEPS

HCSTD5 - 5 STEPS

SS LADDERS & HANDRAILS

Stainless steel pool Ladder with non slip threads , Pinch anchor & Ladder Bumper



Overflow Ladder

Overflow ladder with handrails including non slip step. 42mm dia Rails and steps made from 304 stainless steel

HCOFF2 - 2 STEPS

HCOFF3 - 3 STEPS

HCOFF4 - 4 STEPS

HCOFF5 - 5 STEPS

UNDERWATER LIGHTS

Stainless steel - SS316

Wall Mounted Lights for Swimming Pool / Water Feature applications



HCWM6SS Warm White LED light 3W/ 6W-12V

HCWM18SS Warm White LED light 10W/ 18W-12V

HCWM25SS Warm White LED light 25W -12V



HCWM35SS Warm White LED light 35W -12V

HCWM60SS Warm White LED light 60W -12V

Stand / Niche Mounted Lights for Swimming Pool / Water Feature applications



HCNSM6SS Warm White LED light 3W/ 6W-12V

HCNSM9SS Warm White LED light 9W -12V



HCNSM12SS Warm White LED light 12W -12V

HCNSM18SS Warm White LED light 18W -12V

UNDERWATER LIGHTS Stainless steel - SS316**Nozzle Ring Lights for Swimming Pool / Above water applications**

HCRL9SS1 Warm White LED Ring light 9w - 12v suitable for 1" fountain nozzle

HCRL15SS1 Warm White LED Ring light 12w/15w - 12v suitable for 1" fountain nozzle

HCRL9SS2 Warm White LED Ring light 9w - 12v suitable for 1.5" fountain nozzle



HCRL12SS2 Warm White LED Ring light 12w/15w - 12v suitable for 1.5" fountain nozzle

HCRL18SS2 Warm White LED Ring light 18w - 12v suitable for 1.5" fountain nozzle

Underwater Wall Mounted Lights with SS ABS Face plate, SS body

HCWML12WWSS Warm White LED light 12w - 12v with SS Face plate

HCWML12CWSS Cool White LED light 12w - 12v with SS Face plate

HCWML12RSS Underwater LED light 12W-12V with SS Face plate



HCWML25WWSS Warm White LED light 25W-12V with SS Face plate

HCWML35WWSS Underwater LED light 35W-12V with SS Face plate

Underwater Wall Mounted Lights with ABS Face plate & body

HCWML18WW Warm White LED light 18W-12V with ABS Face plate & body

HCWML18CW Cool White LED light 18W-12V with ABS Face plate & body

HCWML18R RGB LED light 18W-12V with ABS Face plate & body

Swimming Pool Underwater Lights

HCUWL300N Light for concrete pool. 300W/12V Light & Niche with 3m cable

HCWMN100H Wall Mounted Halogen Flat Light in ABS 100W/12V

HCUWL50C Light for concrete pool. 50W/12V Light with ABS face plate

HCWML16-24W LED light with driver. 16-24W/24V Light & Niche with 3m cable

HCDB Ip65 rated Deck Box for underwater lights

UV CLARIFIERS CUVs ensure that the swimming pool water will have amazing clarity by killing the single cell algae that causes green water.

UV Clarifier System with Timer and SS body for Residential Pool



HC UVC TIMER 40W	Blue Lagoon UVC Timer 40000L/40Watt, 11m ³ /
HC UVC TIMER 75W	Blue Lagoon UVC Timer 75000L/75Watt, 16m ³ /
HC UVC TIMER 130W	Blue Lagoon UVC Timer 150000L/130Watt, 22m ³ /

UV Clarifier System for semi commercial Pool



HC UVC PRO 75W	UVC Pro 75000L/75Watt, 18m ³ /hr
HC UVC PRO 130W	UVC Pro 150000L/130Watt 22m ³ /hr
HC UVC PRO BUSTER	UVC Pro BUSTER 450000L/3 X 130Watt, 35m ³ /hr

UV Clarifiers in ABS without Timer System



HCUV015	15 Watt UV Clarifier, 450mm (L) x 167mm (H) x 88mm (D) Suitable for 7.5-15K ltrs
----------------	--



HCUV016	25 Watt UV Clarifier, 450mm (L) x 167mm (H) x 88mm (D) Suitable for 10-20K ltrs
----------------	---



HCUV017	30 Watt UV Clarifier, 1000mm (L) x 167mm (H) x 88mm (D) Suitable for 15-30K ltrs
----------------	--



HCUV018	55 Watt UV Clarifier, 1000mm (L) x 167mm (H) x 88mm (D) Suitable for 20-55K ltrs
----------------	--



HCUV019	75 Watt UV Clarifier, 1000mm (L) x 167mm (H) x 88mm (D) Suitable for 25-75K ltrs
HCUV020	110 Watt UV Clarifier, 1000mm (L) x 167mm (H) x 88mm (D) Suitable for 25-110K ltrs

OZONATOR Ozone generators to keep swimming pool water clean and odour free.

Prozone UV Systems



PZ7-1 PZVII-1 Ozonator Venturi driven rated up to 68m³ C/W adjustable saddle clamps

PZ7-1 PZVII-2 Ozonator Venturi driven rated up to 150m³ C/W adjustable saddle clamps



PZ7-1 PZII-1 Ozonator Compressor driven rated comes C/W adjustable saddle clamps

PZ7-2 PZII-2 Ozonator Compressor driven rated comes C/W adjustable saddle clamps

PZ7-4 PZII-4 Ozonator Compressor driven

PZ7-8 PZII-8 Ozonator Compressor driven

E Series Salt Chlorinator



ESSC25 Certikin E25 Salt Chlorinator, 25gms/hr, pools up to 96m³

ESSC35 Certikin E25 Salt Chlorinator, 25gms/hr, pools up to 96m³

Commercial UV



BL420 - 168 BLUE LAGOON Commercial UV suitable upto 78 m³/hr, with 90mm connections

BL400-204 BLUE LAGOON Commercial UV suitable upto 22 m³/hr, with 100mm connections



BL600-219 BLUE LAGOON Commercial UV suitable upto 140 m³/hr, with 125mm connections

BL975-306 BLUE LAGOON Commercial UV suitable upto 306 m³/hr, with 250mm connections

CHEMICAL DOSING SYSTEM

Swimming Pool Dosing Pump System is designed to inject chemicals into piping systems. All models are equipped with a side mounted mechanical flow rate adjustment knob Easy access, side mounted mechanical feed rate adjustment.



HCCDP505 Chemical dosing pump, 5LPH@5Bar



HCCDT100 Chemical Dosing tank 100LTR

HCCDT60 Chemical Dosing tank 60 LTR



HCSTR600 Stirrer 600mm Long

HCCDT900 Stirrer 900mm Long



HCCF9 9LBS / 4 Kg, Chemical Feeder (HS code 39269099)



HCRPC121 Use of alum gel in the pool creates a gel-like substance in the water that causes microscopic suspended particles to clump together and sink to the bottom of the pool



HCTCCA90 Trichloroisocyanuric Acid & chemical is used as a disinfecting agent in swimming pools and fountain water bodies and helps in achieving sparkling clean and clear water.

STAINLESS STEEL WATER FALL FITTING

Graceful waterfalls of robust and non-rusting stainless steel Individual design and easy install possibilities thanks to 3 different widths Elegant, uniform water pattern up to 1 m in height



WPWF300SS 300mm wide Recommended flow 5m³/hr, Max recommended heights in 300mm

WPWF600SS 600mm wide Recommended flow 7m³/hr, Max recommended heights in 750mm

WPWF900SS 900mm wide Recommended flow 11m³/hr, Max recommended heights in 1000mm

WPWF1200SS 1200mm wide Recommended flow 14m³/hr, Max recommended heights in 1200mm

WATER CURTAIN

This ornamental effect creates a large screen of water that serves as a perfect surface



WPCANMINI300 Water cannon mini300 - H-300xW-300mm, Flow - 7m³/hr, inlet PVC connections 50mm (1-1/2")



WPCANMINI500 Water cannon mini500 - H-500xW-500mm, Flow - 16m³/hr, inlet PVC connections 63mm (2")



WPCANMINI50 Water cannon mini500 - H-500xW-500mm, Flow - 16m³/hr, inlet PVC connections 63mm (2")



HCCOBMINI500 Cobra Water fall mini500- H-500xW-500mm, Flow - 16m³/hr, inlet PVC connections 63mm (2")



HCCOBMAXI500 Cobra Water fall maxi500- H-500xW-500mm, Flow - 16m³/hr, inlet PVC connections 63mm (2")



HCCOBUL400 Cobra Water fall ultra400- H-1000xW-400mm, Flow - 11m³/hr, inlet PVC connections 63mm (2")

HEAT PUMP

Heat pumps are specifically designed for swimming pool heating. Comes with Titanium heat exchanger, Exterior UV protected ABS body, with reversible defrosting and R410A Gas. Single fans upto 21KW & Twin fans for 26 & 31KW



Code Number	Description
HCHPD5.5	Swimming pool Heat Pump, Output 5.5KW
HCHPD12.5	Swimming pool Heat Pump, Output 12.5KW
HCHPD15	Swimming pool Heat Pump, Output 15KW
HCHPD17	Swimming pool Heat Pump, Output 17KW
HCHPD21	Swimming pool Heat Pump, Output 21KW
HCHPD26	Swimming pool Heat Pump, Output 26KW
HCHPD31	Swimming pool Heat Pump, Output 31KW

Heat pumps are specifically designed for swimming pool heating. Comes with Titanium heat exchanger, Exterior UV protected ABS body, with reversible defrosting and R410A Gas. Top mounted Twin fans for 35,45,55,70KW, Three fans for all larger models



Code Number	Description
HCHPC35	Commercial Swimming pool Heat Pump, Output 35KW
HCHPC45	Commercial Swimming pool Heat Pump, Output 45KW
HCHPC55	Commercial Swimming pool Heat Pump, Output 55KW
HCHPC70	Commercial Swimming pool Heat Pump, Output 70KW
HCHPC90	Commercial Swimming pool Heat Pump, Output 90 KW
HCHPC105	Commercial Swimming pool Heat Pump, Output 105KW
HCHPC135	Commercial Swimming pool Heat Pump, Output 135KW

POOL / SPA WATER HEATER

Electrical water heaters of swimming pool / spa will keep heated at a consistent temperature between eighty and ninety degrees. If you are set in a daily, year-round swimming routine then this heater is the choice for you. Make: Certikin



Code Number	Description
EVOMAX9	Swimming Pool Water Heater, cap; 9kW
EVOMAX12	Swimming Pool Water Heater, cap; 12kW
EVOMAX15	Swimming Pool Water Heater, cap; 15kW
EVOMAX18	Swimming Pool Water Heater, cap; 18kW
CLSMAX24	Swimming Pool Water Heater, cap; 24kW

INVERTER HEAT PUMP

Heat pump with DC-TWIN inverter compressor, Twisted Titanium heat exchanger for higher efficiency, EEV technology for increased COP, R32 gas (eco friendly than R410A), silent model in the industry



Code Number	Description
HC90I	Inverter Heat Pump Domestic, 9KW Output (0.19-1.38KW INPUT)
HC130I	Inverter Heat Pump Domestic, 13KW Output (0.26 -1.80KW INPUT)
HC170I	Inverter Heat Pump Domestic, 17KW Output (0.33 -2.50KW INPUT)
HC210I	Inverter Heat Pump Domestic, 21KW Output (0.38 -2.90KW INPUT)
HC280I	Inverter Heat Pump Domestic, 28KW Output (0.49 -3.80KW INPUT)
HC350SI	Inverter Heat Pump Domestic, 35KW Output (0.65 -4.84KW INPUT)

SWIMMING POOL COVER



HCSPC01

Swimming pool cover necessary with stainless steel hooks with rope.



HCSPC02

Pool cover with 83mm PVC slats of White, Blue, Sable, Light Grey



HCSPCR02

Manual pool roller, Rockey Roller senior

VALVES PVC-U [STD] Ball valve - DIN Standard. Make: Cepex



36500	16mm PVC-U [STD] BALL VALVE (PE-EPDM) solvent socket
36501	20mm PVC-U [STD] BALL VALVE (PE-EPDM) solvent socket
36502	25mm PVC-U [STD] BALL VALVE (PE-EPDM) solvent socket
36503	32mm PVC-U [STD] BALL VALVE (PE-EPDM) solvent socket
36504	40mm PVC-U [STD] BALL VALVE (PE-EPDM) solvent socket
36505	50mm PVC-U [STD] BALL VALVE (PE-EPDM) solvent socket
36506	63mm PVC-U [STD] BALL VALVE (PE-EPDM) solvent socket
36507	75mm PVC-U [STD] BALL VALVE (PE-EPDM) solvent socket
36508	90mm PVC-U [STD] BALL VALVE (PE-EPDM) solvent socket

VALVES PVC-U [STD] Ball valve - DIN Standard. Make: Cepex

36509	110mm PVC-U [STD] BALL VALVE (PE-EPDM) solvent socket
36511	1/2" PVC-U [STD] BALL VALVE BSP female thread
36512	3/4" PVC-U [STD] BALL VALVE BSP female thread
36513	1" PVC-U [STD] BALL VALVE BSP female thread
36514	1 1/4" PVC-U [STD] BALL VALVE BSP female thread
36515	1 1/2" PVC-U [STD] BALL VALVE BSP female thread
36516	2" PVC-U [STD] BALL VALVE BSP female thread
36517	2 1/2" PVC-U [STD] BALL VALVE BSP female thread
36518	3" PVC-U [STD] BALL VALVE BSP female thread
36519	4" PVC-U [STD] BALL VALVE BSP female thread

VALVES PVC-U [UNIBLOCK] Ball valve- DIN Standard. Make: Cepex

22773	20mm PVC-U "UNIBLOCK" BALL VALVE solvent socket
22774	25mm PVC-U "UNIBLOCK" BALL VALVE solvent socket
22775	32mm PVC-U "UNIBLOCK" BALL VALVE solvent socket
22776	40mm PVC-U "UNIBLOCK" BALL VALVE solvent socket
11375	50mm PVC-U "UNIBLOCK" BALL VALVE solvent socket
15826	63mm PVC-U "UNIBLOCK" BALL VALVE solvent socket
22777	75mm PVC-U "UNIBLOCK" BALL VALVE solvent socket
22778	90mm PVC-U "UNIBLOCK" BALL VALVE solvent socket
36728	110mm PVC-U "UNIBLOCK" BALL VALVE solvent socket
22791	1/2" PVC-U "UNIBLOCK" BALL VALVE BSP female thread
22792	3/4" PVC-U "UNIBLOCK" BALL VALVE BSP female thread
22793	1" PVC-U "UNIBLOCK" BALL VALVE BSP female thread

VALVES PVC-U [UNIBLOCK] Ball valve- DIN Standard. Make: Cepex



22794	1 1/4" PVC-U "UNIBLOCK" BALL VALVE BSP female thread
11377	1 1/2" PVC-U "UNIBLOCK" BALL VALVE BSP female thread
15829	2" PVC-U "UNIBLOCK" BALL VALVE BSP female thread
22795	2 1/2" PVC-U "UNIBLOCK" BALL VALVE BSP female thread
22796	3" PVC-U "UNIBLOCK" BALL VALVE BSP female thread
36729	4" PVC-U "UNIBLOCK" BALL VALVE BSP female thread

VALVES PVC-U Spring Check valve - DIN Standard. Make: Cepex



09010	16mm PVC-U CHECK VALVE (EPDM) solvent socket
09011	20mm PVC-U CHECK VALVE (EPDM) solvent socket
09012	25mm PVC-U CHECK VALVE (EPDM) solvent socket
09013	32mm PVC-U CHECK VALVE (EPDM) solvent socket
09014	40mm PVC-U CHECK VALVE (EPDM) solvent socket
09015	50mm PVC-U CHECK VALVE (EPDM) solvent socket
09016	63mm PVC-U CHECK VALVE (EPDM) solvent socket
09017	75mm PVC-U CHECK VALVE (EPDM) solvent socket
09018	90mm PVC-U CHECK VALVE (EPDM) solvent socket
09019	110 (DN 80)mm PVC-U CHECK VALVE solvent socket
37076	110 (DN 110)mm PVC-U CHECK VALVE (EPDM) solvent socket

VALVES PVC-U Ball Check valve - DIN Standard. Make: Cepex



22078	20mm PVC-U BALL CHECK VALVE (EPDM) solvent socket
22079	25mm PVC-U BALL CHECK VALVE (EPDM) solvent socket
22080	32mm PVC-U BALL CHECK VALVE (EPDM) solvent socket
22174	40mm PVC-U BALL CHECK VALVE (EPDM) solvent socket
25697	50mm PVC-U BALL CHECK VALVE (EPDM) solvent socket

VALVES PVC-U Ball Check valve - DIN Standard. Make: Cepex

- | | |
|--------------|---|
| 25698 | 63mm PVC-U BALL CHECK VALVE (EPDM) solvent socket |
| 25175 | 75mm PVC-U BALL CHECK VALVE (EPDM) solvent socket |
| 25176 | 90mm PVC-U BALL CHECK VALVE (EPDM) solvent socket |

VALVES PVC-U FLANGE ADAPTER - DIN STANDARD Make: Cepex


- | | |
|--------------|--|
| 22580 | 63mm PVC FLANGE ADAPTOR (STUB & BACKING RING) |
| 02226 | 75mm PVC FLANGE ADAPTOR (STUB & BACKING RING) |
| 02227 | 90mm PVC FLANGE ADAPTOR (STUB & BACKING RING) |
| 02228 | 110mm PVC FLANGE ADAPTOR (STUB & BACKING RING) |
| 02229 | 125mm PVC FLANGE ADAPTOR (STUB & BACKING RING) |
| 02230 | 140mm PVC FLANGE ADAPTOR (STUB & BACKING RING) |
| 02231 | 160mmPVC FLANGE ADAPTOR (STUB & BACKING RING) |
| 02232 | 200mm PVC FLANGE ADAPTOR (STUB & BACKING RING) |

VALVES PVC-U Wafer Check valve - DIN Standard. Make: Cepex

- | | |
|--------------|-------------------------------|
| 37055 | 63mm PVC-U WAFER CHECK VALVE |
| 08984 | 75mm PVC-U WAFER CHECK VALVE |
| 08985 | 90mm PVC-U WAFER CHECK VALVE |
| 08986 | 110mm PVC-U WAFER CHECK VALVE |
| 09040 | 125mm PVC-U WAFER CHECK VALVE |
| 08987 | 140mm PVC-U WAFER CHECK VALVE |
| 08988 | 160mm PVC-U WAFER CHECK VALVE |
| 09041 | 200mm PVC-U WAFER CHECK VALVE |

VALVES PVC-U SPRING FOOT VALVE - DIN STANDARD

08992	25mm PVC-U FOOT VALVE (EPDM) solvent socket
08993	32mm PVC-U FOOT VALVE (EPDM) solvent socket
08994	40mm PVC-U FOOT VALVE (EPDM) solvent socket
08995	50mm PVC-U FOOT VALVE (EPDM) solvent socket
08996	63mm PVC-U FOOT VALVE (EPDM) solvent socket
08997	75mm PVC-U FOOT VALVE (EPDM) solvent socket
08998	90mm PVC-U FOOT VALVE (EPDM) solvent socket
08999	110 (DN 80)mm PVC-U FOOT VALVE (EPDM) solvent socket

VALVES PVC-U Wafer Check valve - DIN Standard. Make: Cepex

27537	20mm PVC-U BALL FOOT VALVE (EPDM) solvent socket
27538	25mm PVC-U BALL FOOT VALVE (EPDM) solvent socket
27539	32mm PVC-U BALL FOOT VALVE (EPDM) solvent socket
27540	40mm PVC-U BALL FOOT VALVE (EPDM) solvent socket
25705	50mm PVC-U BALL FOOT VALVE (EPDM) solvent socket
25706	63mm PVC-U BALL FOOT VALVE (EPDM) solvent socket
27543	75mm PVC-U BALL FOOT VALVE (EPDM) solvent socket
27544	90mm PVC-U BALL FOOT VALVE (EPDM) solvent socket
27545	110mm PVC-U BALL FOOT VALVE (EPDM) solvent socket

VALVES PVC-U BUTTERFLY VALVE - STANDARD

32614	63-75mm PVC-U STANDARD SERIES BUTTERFLY VALVE
32615	90mm PVC-U STANDARD SERIES BUTTERFLY VALVE
32616	110mm PVC-U STANDARD SERIES BUTTERFLY VALVE
32617	125-140mm PVC-U STANDARD SERIES BUTTERFLY VALVE
32618	160mm PVC-U STANDARD SERIES BUTTERFLY VALVE
32619	200-225mm PVC-U STANDARD SERIES BUTTERFLY VALVE
46647	250mm PVC-U STANDARD SERIES BUTTERFLY VALVE