


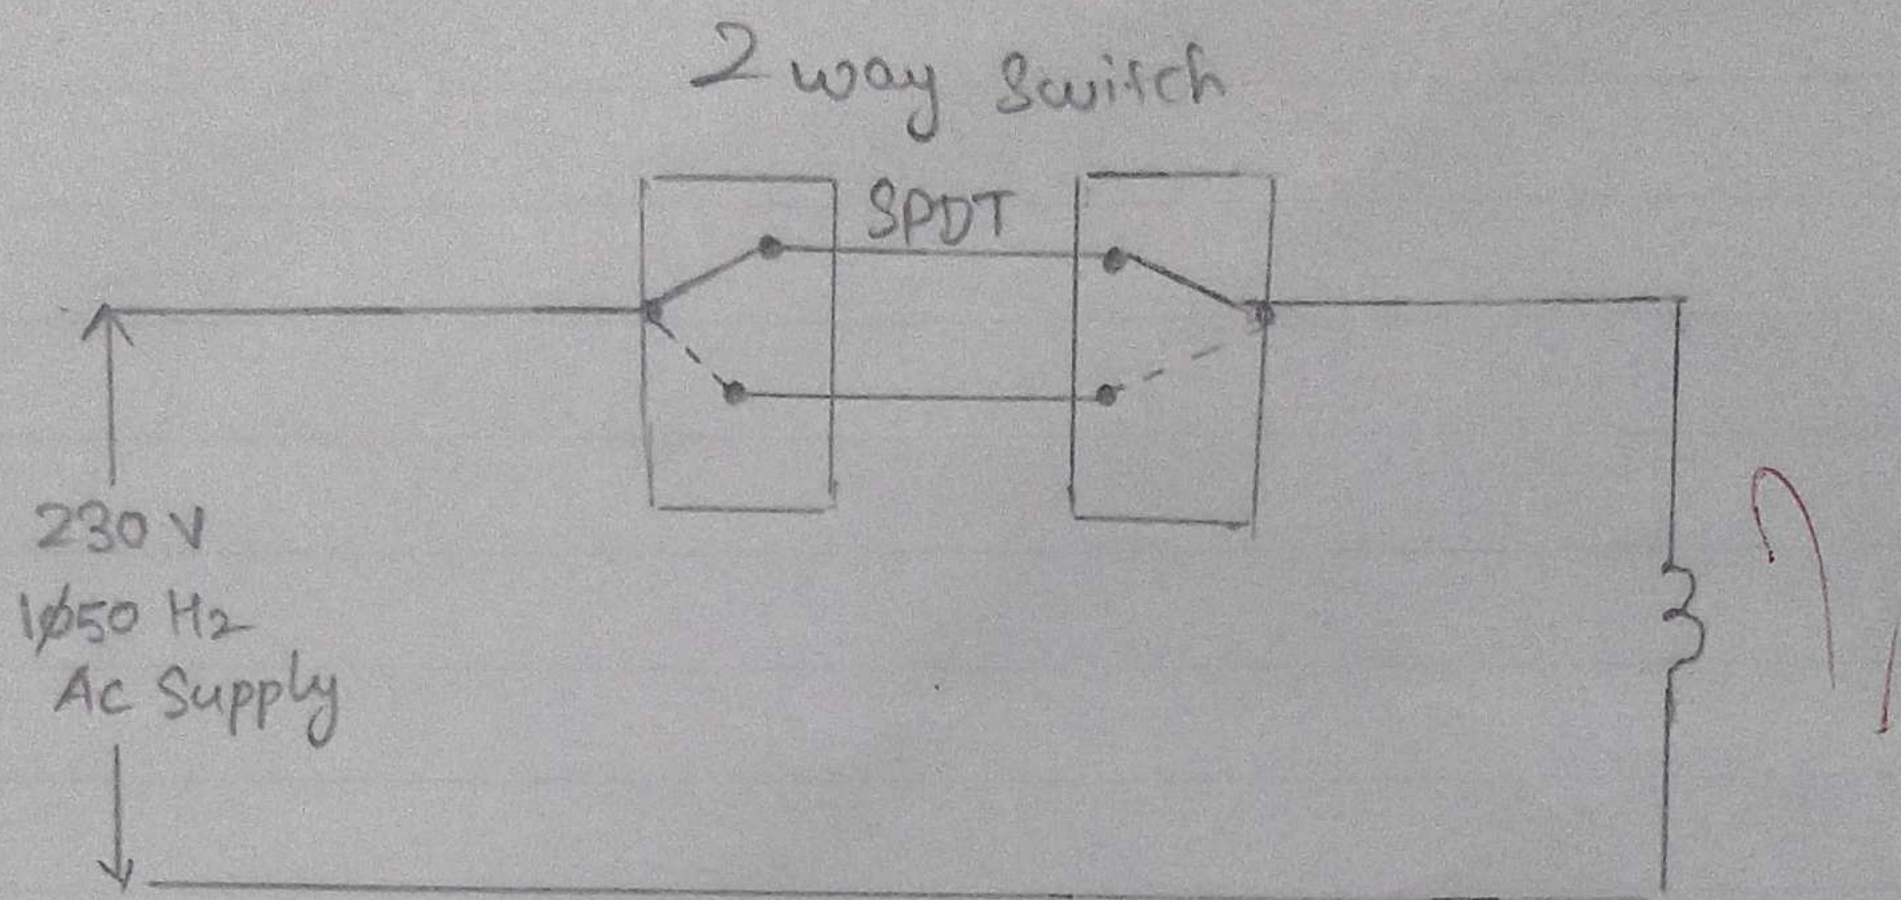

SPDT - Single pole double throw Switch

NODE	S ₁	S ₂	LAMP
1	ON	ON	ON
2	ON	OFF	OFF
3	OFF	ON	ON
4	OFF	OFF	ON

Components	Proteus	Specification .
Ac Supply	Vsine	Amplitude = 23V
Two-way Switch	SPDT	Frequency = 50Hz
Lamp	Animated	230V

23/2/26

STAIRCASE WIRINGAIM:

To develop and test the Staircase wiring using proteus:

APPARATUS REQUIRED:

Laptop with proteus Software



THEORY:

Staircase wiring is a common multiple way Switching or two way Switching. It involves wiring for one light with two switches. In this Setup is controlled by two switches located at different position. It allows the user to operate the load from separate position above or below the Staircase. from inside or outside of room or two way led Switch.


PROCEDURE:

* Drag the required components from the proteus library.


* Connect the components as per the Circuit diagram.

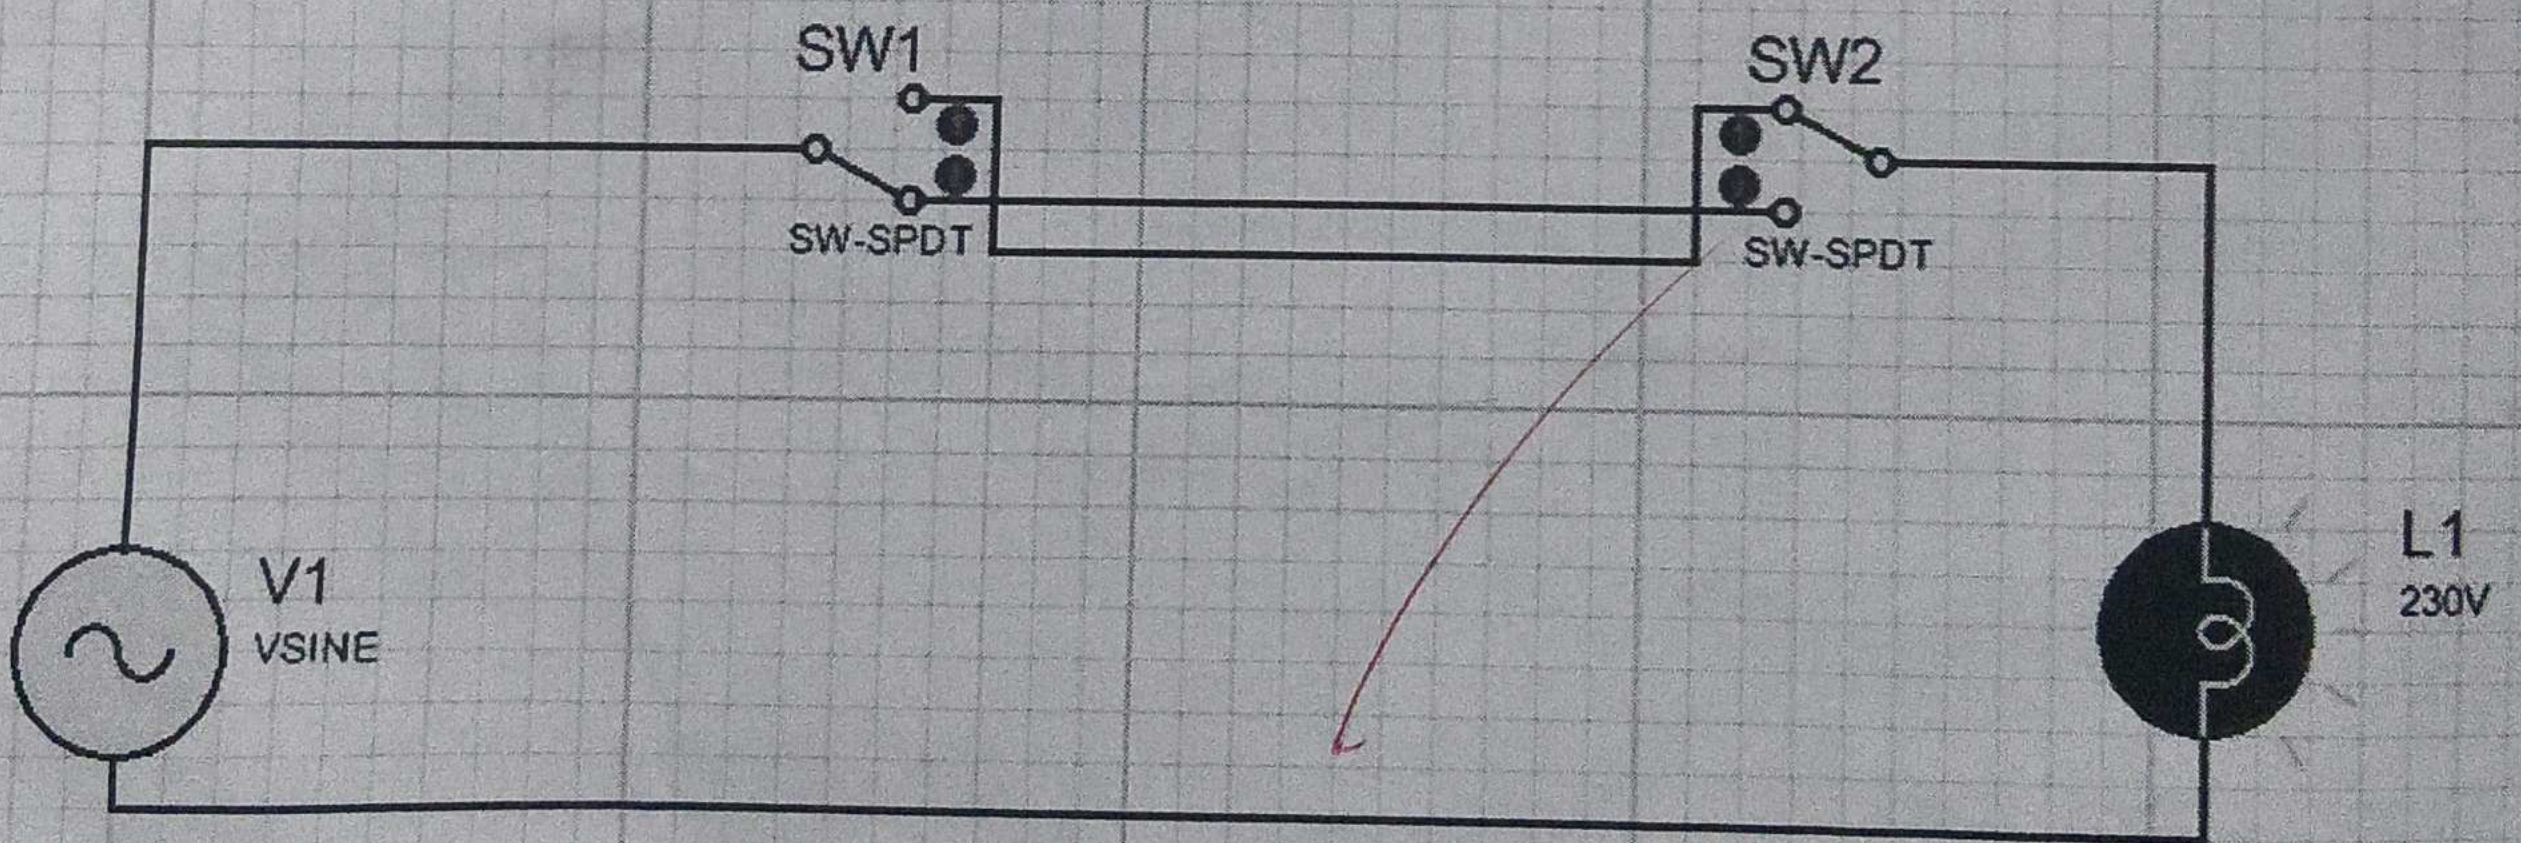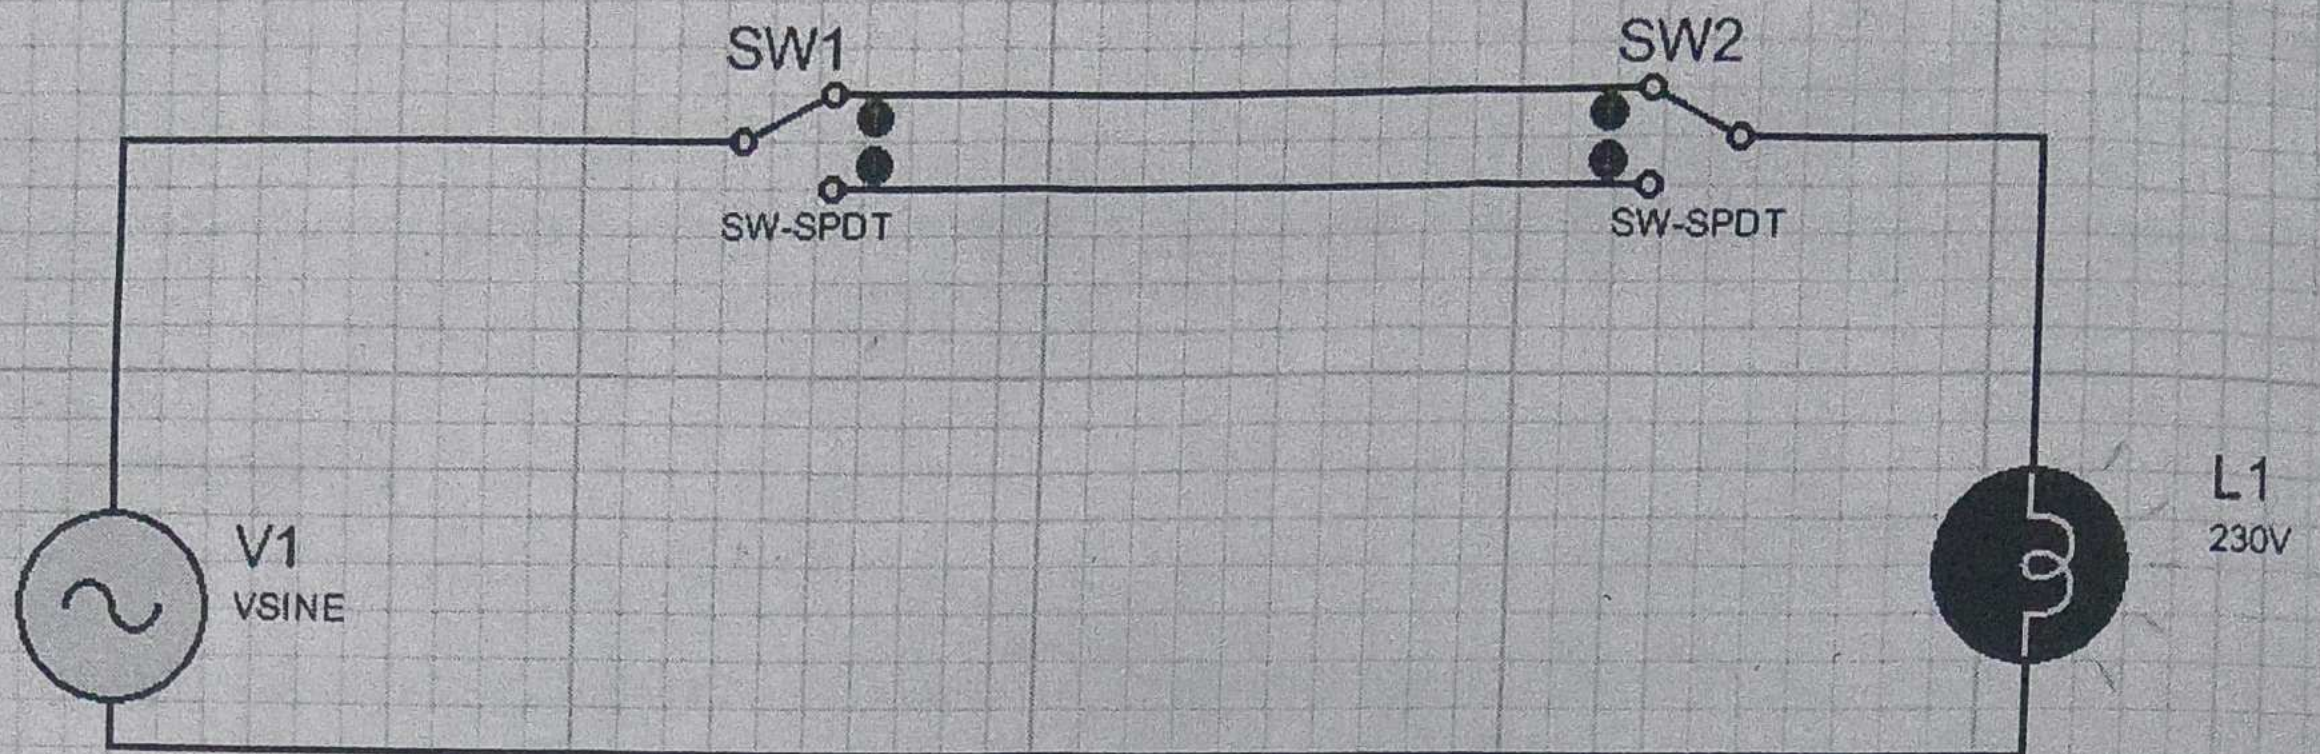

*Run the simulation and check the lamp for different switching conditions.

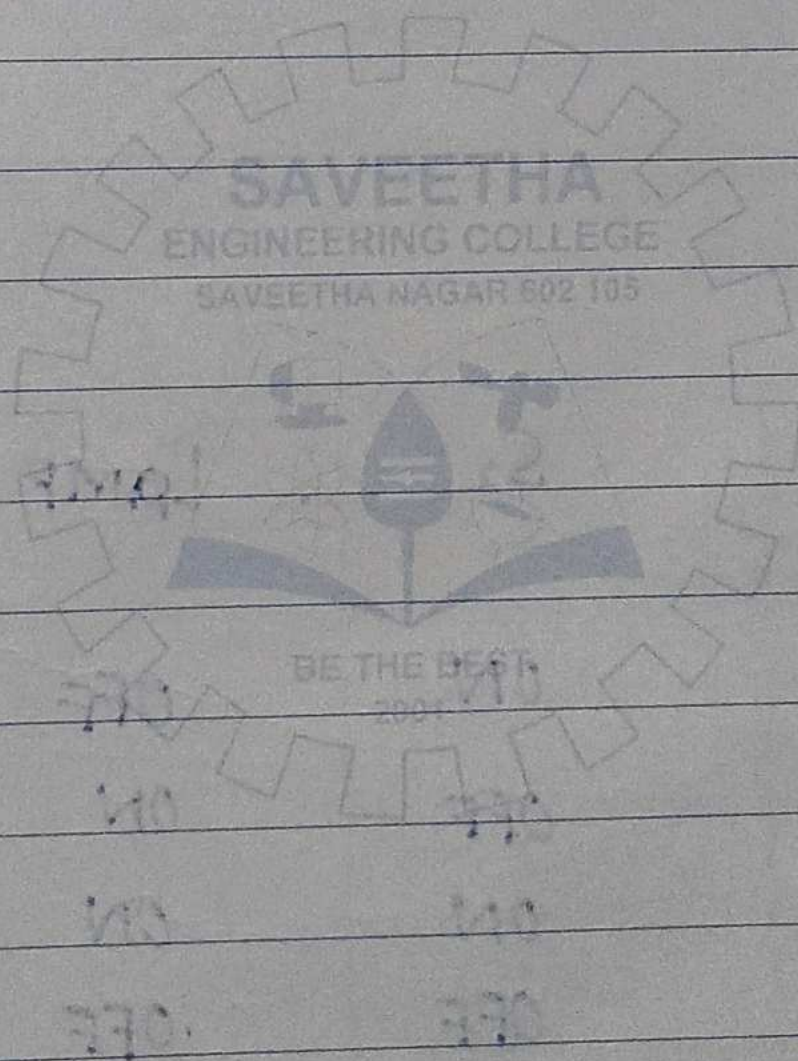

CROSS CONNECTION :

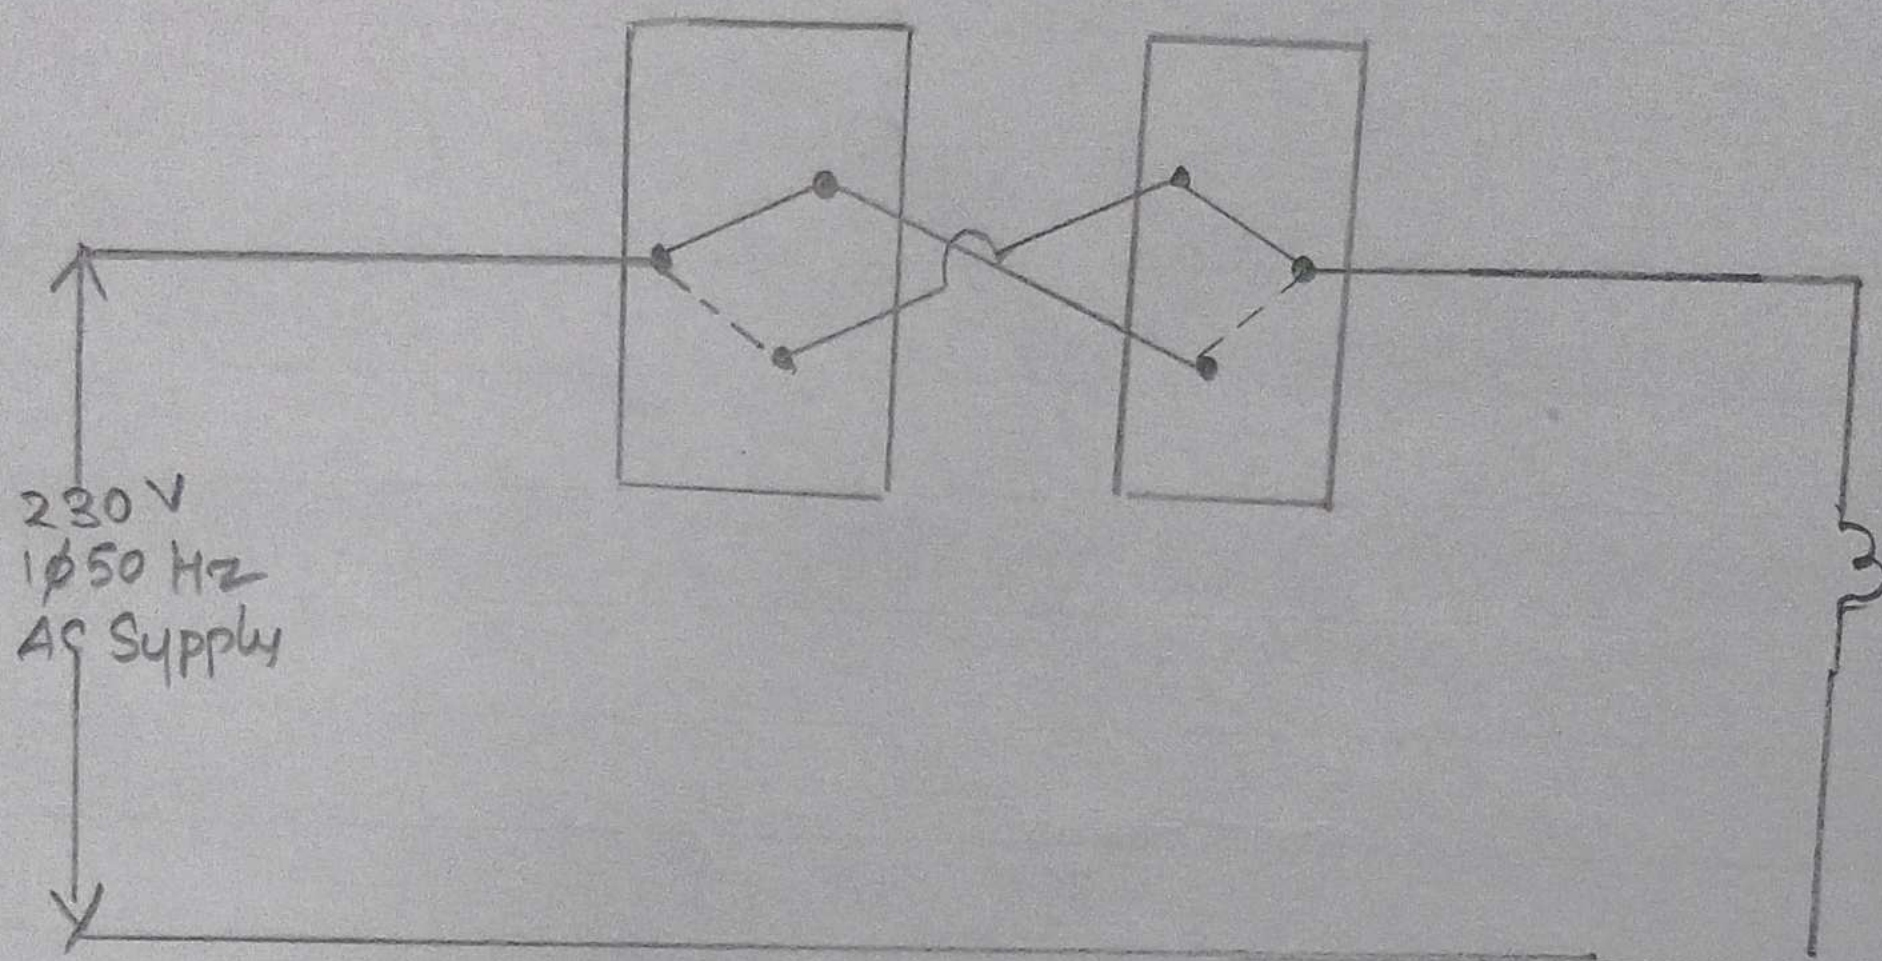

NODE	S ₁	S ₂	LAMP
1	ON	ON	OFF
2	ON	OFF	ON
3	OFF	ON	ON
4	OFF	OFF	OFF

99

18/03/16

Result:

Thus the Staircase wiring connections were developed and tested Successfully.