AC6963A Datasheet

Zhuhai Jieli Technology Co.,LTD

Version：V1.0

Date：2020.03.14

AC6963A Features

CPU
- 32-bit DSP supports hardware Float Point Unit (FPU)
- Up to 160MHz programmable processor
- 64Vectored interrupts
- 4 Levels interrupt priority

DSP Audio Processing
- SBC, AAC Audio decodes supported for BT audio
- mSBC voice codecs supported for BT phone
- Supports MP2, MP3, WMA, APE, FLAC, AAC, MP4, M4A, WAV, AIF, AIFC audio decoding
- Packet Loss Concealment (PLC) for voice processing
- Acoustic echo cancellation/suppression (AEC,AES)
- Single/Dual MIC Environmental Noise Cancellation (ENC)
- Multi-band DRC limiter
- 10-band EQ configuration for voice Effects

Audio Codec
- Two channels 16-bit DAC, SNR >= 95dB
- One channels 16-bit ADC , SNR >= 90dB
- Sampling rates of 8KHz/11.025KHz/16KHz/22.05KHz/24KHz/32KHz/44.1KHz/48KHz are supported
- One analog MIC amplifier, build-in MIC bias

PMU
- Low voltage LDO for internal digital and analog circuit supply
- 3uA current consumption in the soft-off mode
- Built-in LDO for the core, I/O, Bluetooth and flash
- VBAT is 2.2V to 5.5V
- VDDIO is 2.2V to 3.6V

Packages
- QFN20(3mm*3mm)

generator
- Supports two PDM digital MIC inputs
- Two channels Mono analog MUX
- Supports cap-less, single-ended, and differential mode at the DAC path
- Supports 16ohm and 32ohm Speaker loading

Bluetooth
- Compliant with Bluetooth V5.1+BR+EDR+BLE specification
- Meet class1 class2 and class3 transmitting power requirement
- Support GFSK and $\pi/4$ DQPSK all paket types
- Provides +6dbm transmitting power receiver with -90dBm sensitivity
- Fast AGC for enhanced dynamic range
- Supports a2dp\avctp\avdtp\avrcp\hfp\spp\smp\att\gap\gatt\rfcomm\sdp\l2cap profile

Peripherals
- One full speed USB 2.0 OTG controller
- Six multi-function 32-bit timers, support capture and PWM mode
- Three full-duplex basic UART, UART0 and UART1 supports DMA mode
- One hardware IIC interface supports host and device mode
- 10-bit ADC for analog sampling
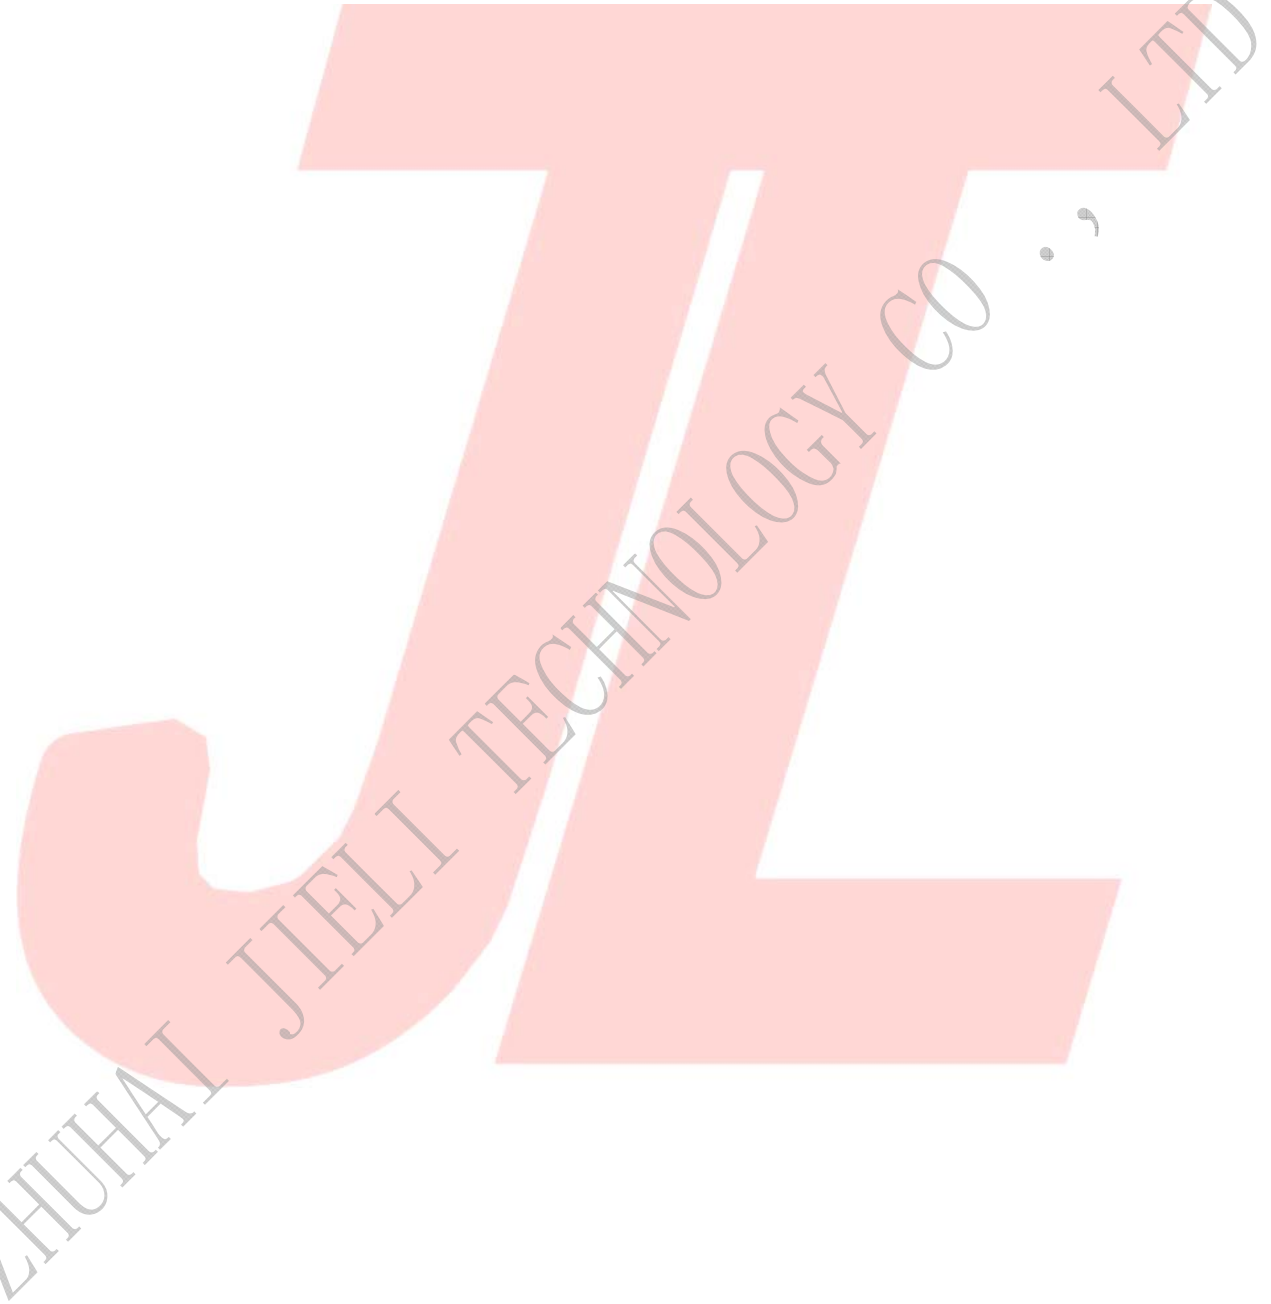- External wake up/interrupt on all GPIOs

Temperature
- Operating temperature: -20℃ to +70℃
- Storage temperature: -65℃ to +150℃

Applications
- Bluetooth TWS Earphone
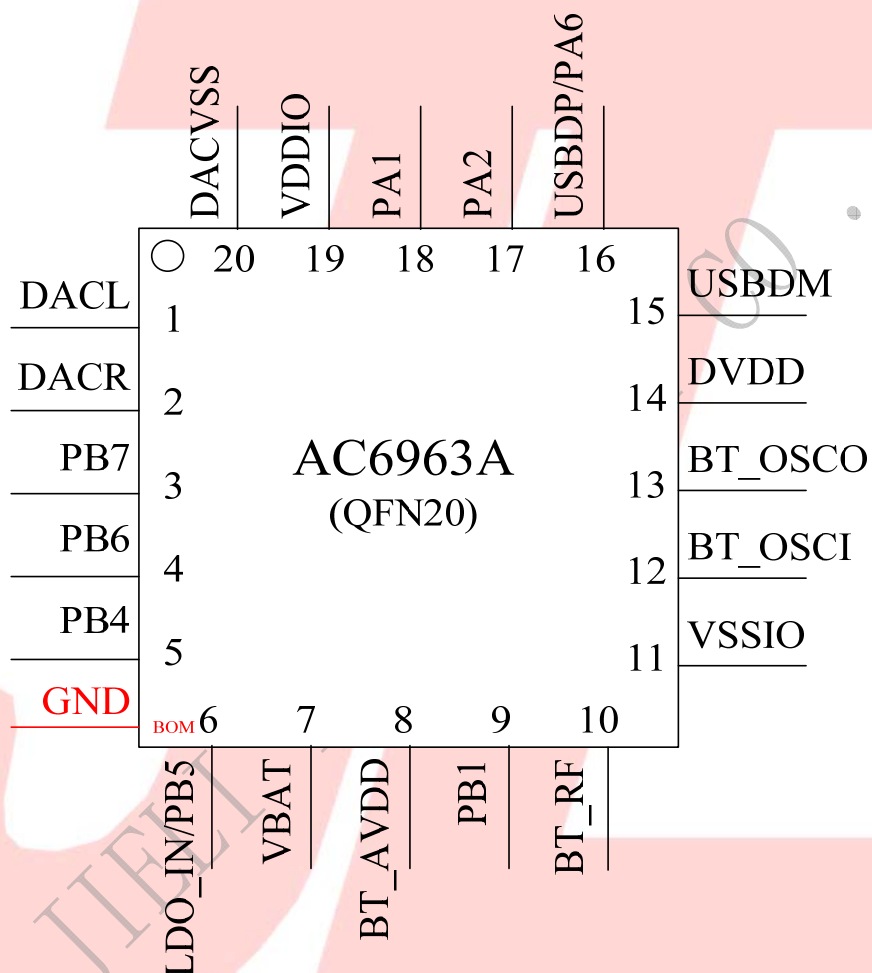
1、Pin Definition

1.1 Pin Assignment

Figure 1-1   AC6963A_QFN20 Package Diagram

1.2 Pin Description

Table 1-1 AC6963A_QFN20 Pin Description

PIN NO.	Name	I/O Type	Drive (mA)	Function	Other Function
1	DACL	O	/		DAC Left Channel
2	DACR	O	/		DAC Right Channel
3	PB7	I/O	24/8	GPIO	AMUX1R：Analog Channel1Right; SPI2DOA：SPI2 Data Out(A); IIC_SDA_C：IIC DAT(C); ADC9：ADC Input Channel 9; PWM5：Timer5 PWM Output； UART1RXA：Uart1 Data In(A);
4	PB6	I/O	24/8	GPIO	AMUX1L：Analog Channel1 Left; SPI2CLKA：SPI2 Data Out(A); IIC_SCL_C：IIC SCL(C); ADC8：ADC Input Channel 8; TMR3：Timer3 Clock Input; UART1TXA：Uart1 Data Out(A);
5	PB4	I/O	24/8	GPIO	SPI0_DAT2A(2)：SPI0 Data2 Out_A(2); ADC7：ADC Input Channel 7; CLKOUT1 UART2TXC：Uart2 Data Out(C); UART2RXC：Uart2 Data In(C);
6	LDO_IN	P	/		Battery Charger In
6	PB5	I/O	8	GPIO (High Voltage Resistance)	SPI2DIA：SPI2 Data Input(A); PWM3：Timer3 PWM Output； CAP1：Timer1 Capture; UART0TXC：Uart0 Data Out(C)； UART0RXC：Uart0 Data In(C);
7	VBAT	P	/		Battery Power Supply
8	BT_AVDD	P	/		BT Power
9	PB1	I/O	24/8	GPIO (pull up)	Long Press Reset； SPI1DOA：SPI1 Data Out(A); ADC5：ADC Input Channel 5; TMR2：Timer2 Clock Input; UART0RXB：Uart0 Data In(B);
10	BT_RF	/	/		BT Antenna
11	VSSIO	P	/		Ground

12	BT_SOCI	I	/		BT OSC In
13	BT_SOCO	O	/		BT OSC Out
14	DVDD	P	/		Core Power
15	USBDM	I/O	4	USB Negative Data (pull down)	SPI2DOB：SPI2 Data Out(B); IIC_SDA_A：IIC SDA(A); ADC14：ADC Input Channel 14; UART1RXD：Uart1 Data In(D);
16	USBDP	I/O	4	USB Positive Data (pull down)	SPI2CLKB：SPI2 Clock(B); IIC_SCL_A：IIC SCL(A); ADC13：ADC Input Channel 13; UART1TXD：Uart1 Data Output(D);
	PA6	I/O	24/8		IIC_SDA_D：IIC SDA(D); ADC4：ADC Input Channel 4; CAP4：Timer4 Capture; UART0RXA：Uart0 Data In(A);
17	PA2	I/O	24/8	GPIO	MIC_BIAS：Microphone Bias Output CAP3：Timer3 Capture;
18	PA1	I/O	24/8	GPIO	MIC：MIC Input Channel ; ADC1：ADC Input Channel 1; PWM4：Timer4 PWM Output; UART1RXC：Uart0 Data In(C);
19	VDDIO	P	/		IO Power 3.3v
20	DACVSS	P	/		DAC Ground

2、 Electrical Characteristics

2.1 Absolute Maximum Ratings

Table 2-1

Symbol	Parameter	Min	Max	Unit
Tamb	Ambient Temperature	-20	+70	°C
Tstg	Storage temperature	-65	+150	°C
VBAT	Supply Voltage	2.2	5.5	V
$V_{3.3IO}$	3.3V IO Input Voltage	-0.3	VDDIO+0.3	V
LDO_IN	Charge Input Voltage	-0.3	5.5	V

2.2 PMU Characteristics

Table 2-2

Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
LDO_IN	Loading current	_	_	300	mA	VBAT = 4.2V
VBAT	Voltage Input	2.2	3.7	5.5	V	
V_{DVDD}	Voltage output	0.9	1.2	1.25	V	VBAT = 4.2V, 30mA loading
V_{VDDIO}	Voltage output	_	3.3	_	V	VBAT = 4.2V, 100mA loading
V_{BT_AVDD}	Voltage output		1.3		V	VBAT=4.2V, 100mA loading

2.3 IO Input/Output Electrical Logical Characteristics

Table 2-3

IO input characteristics						
Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
V_{IL}	Low-Level Input Voltage	-0.3	_	0.3* VDDIO	V	VDDIO = 3.3V
V_{IH}	High-Level Input Voltage	0.7* VDDIO	_	VDDIO+0.3	V	VDDIO = 3.3V
IO output characteristics						
V_{OL}	Low-Level Output Voltage	_	_	0.33	V	VDDIO = 3.3V
V_{OH}	High-Level Output Voltage	2.7	_	_	V	VDDIO = 3.3V

2.4 Internal Resistor Characteristics

Table 2-4

Port	General Output	High Drive	Internal Pull-Up Resistor	Internal Pull-Down Resistor	Comment
PA1,A2 PA6 PB1,PB4 PB6,PB	8mA	24mA	10K	10K	1、PB1 default pull up 2、USBDM & USBDP default pull down 3、internal pull-up/pull-down resistance | accuracy ±20%
PB5	8mA	_	10K	10K	
USBDP	4mA	_	1.5K	15K	
USBDM	4mA	_	180K	15K	

2.5 DAC Characteristics

Table 2-5

Parameter	Min	Typ	Max	Unit	Test Conditions
Frequency Response	20	_	20K	Hz	
THD+N	_	-75	_	dB	1KHz/0dB
S/N	_	95	_	dB	10Kohm loading
Crosstalk	_	-90	_	dB	With A-Weighted Filter
Output Swing		1		Vrms	
Dynamic Range		90		dB	1KHz/-60dB 10Kohm loading With A-Weighted Filter
DAC Output Power	11		_	mW	32ohm loading

2.6 ADC Characteristics

Table 2-6

Parameter	Min	Typ	Max	Unit	Test Conditions
Dynamic Range		80		dB	1KHz/-60dB
S/N	_	90	91	dB	
THD+N	_	-70	_	dB	1KHz/-60dB
Crosstalk	_	-90	_	dB	

2.7 BT Characteristics

2.7.1 Transmitter

Basic Data Rate   Table 2-7

Parameter		Min	Typ	Max	Unit	Test Conditions
RF Transmit Power			4	6	dBm	25℃,
RF Power Control Range			20		dB	
20dB Bandwidth			950		KHz	Power Supply
Adjacent Channel Transmit Power	+2MHz		-40		dBm	VBAT=5V
	-2MHz		-38		dBm	2441MHz
	+3MHz		-44		dBm	
	-3MHz		-35		dBm	

Enhanced Data Rate   Table 2-8

Parameter		Min	Typ	Max	Unit	Test Conditions
Relative Power			-1		dB	
π/4 DQPSK Modulation Accuracy	DEVM RMS		6		%	25℃,
	DEVM 99%		10		%	
	DEVM Peak		15		%	Power Supply
Adjacent Channel Transmit Power	+2MHz		-40		dBm	VBAT=5V
	-2MHz		-38		dBm	2441MHz
	+3MHz		-44		dBm	
	-3MHz		-35		dBm	

2.7.2 Receiver

Basic Data Rate   Table 2-9

Parameter		Min	Typ	Max	Unit	Test Conditions
Sensitivity			-90		dBm	
Co-channel Interference Rejection			-13		dB	
Adjacent Channel Interference Rejection	+1MHz		+5		dB	25℃,
	-1MHz		+2		dB	Power Supply
	+2MHz		+37		dB	VBAT=5V
	-2MHz		+36		dB	2441MHz
	+3MHz		+40		dB	
	-3MHz		+35		dB	

Enhanced Data Rate   Table 2-10

Parameter		Min	Typ	Max	Unit	Test Conditions
Sensitivity			-90		dBm	25℃, Power Supply VBAT=5V 2441MHz
Co-channel Interference Rejection			-13		dB	
Adjacent Channel Interference Rejection	+1MHz		+5		dB	
	-1MHz		+2		dB	
	+2MHz		+37		dB	
	-2MHz		+36		dB	
	+3MHz		+40		dB	
	-3MHz		+35		dB	

3、 Package Information

3.1 QFN20(3mm*3mm)

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.50	0.55	0.60
A1	0	0.02	0.05
b	0.15	0.20	0.25
b1	0.14REF		
c	0.10	0.15	0.20
D	2.90	3.00	3.10
D2	1.55	1.65	1.75
e	0.40BSC		
Ne	1.60BSC		
Nd	1.60BSC		
E	2.90	3.00	3.10
E2	1.55	1.65	1.75
L	0.35	0.40	0.45
h	0.20	0.25	0.30
上字体块尺寸	1.95x1.95		
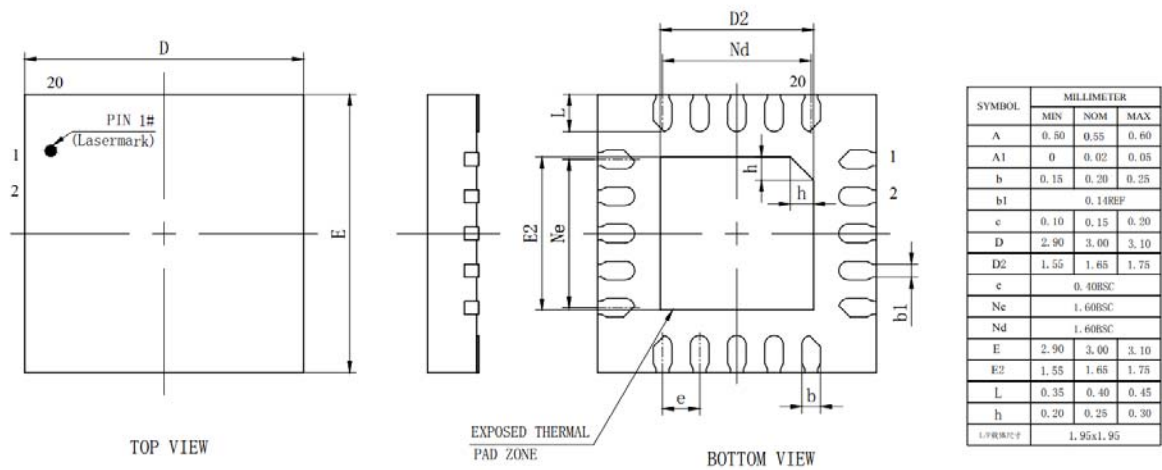
Figure 3-1. AC6963A_QFN20 Package

3、Revision History

Date	Revision	Description
2020.03.14	V1.0	Initial Release