


PROJECT OF ROBOTICS

OBSTACLE AVOIDING ROBOT

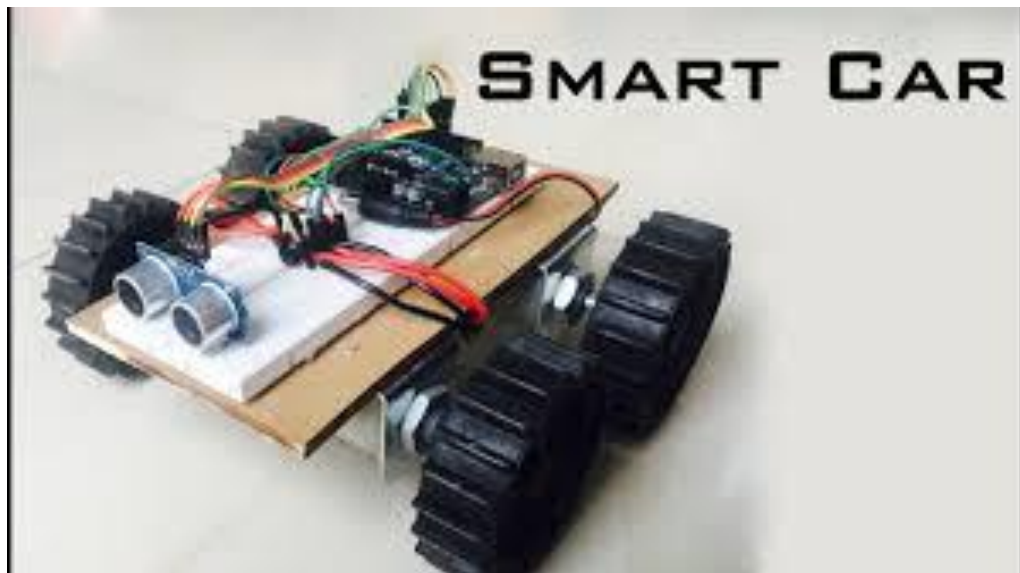

Submitted By:

Kunal Yadav

6205

Bsc.(hons)Electronics(2nd year)

Submitted To:

Mr. Manohar Singh

OBSTACLE AVOIDING ROBOT


INTRODUCTION

The project is designed to build an obstacle avoidance robotic vehicle using ultrasonic sensors for its movement. An Arduino uno is used to achieve the desired operation. A robot is a machine that can perform task automatically. Robotics is generally a combination of computational intelligence and physical machines (motors). Computational intelligence involves the programmed instructions. The project proposes robotic vehicle that has an intelligence built in it such that it guides itself whenever an obstacle comes ahead of it. This robotic vehicle is built, using an Arduino uno. An ultrasonic sensor is used to detect any obstacle ahead of it and sends a command to the Arduino.

In today's world robotics is a fast growing and interesting field. robot has sufficient intelligence to cover the maximum area of provided space. Autonomous Intelligent Robots are robots that can perform desired tasks in unstructured environments without continuous human guidance. The obstacle detection is primary requirement of this autonomous robot. The robot gets the information from surrounding area through mounted sensors on the robot.


SPECIALITIES OF ULTRASOUND TECHNOLOGY

The ultrasonic sensor is one of the best technique which is used for sense for obstacle. The Ultrasonic sensor module "HC-SR04" works on "Echo" concept which is something you get when sound reflects back after reaches the surface. The travelling time of ultrasonic waves is 343m/s. This much of speed is meticulous for MCU's in microcontroller to measure accurately. Practically the waves reflect back from the surface located 4 meters away in 15 ns. The ultrasonic wave does not affect the humans. The ultrasonic sensor is mostly used for distance measurement application. These sensors are able to detect the barriers present in front of them. Ultrasonic sensors generate sound waves with higher frequencies that humans cannot perceive, making them ideal for quiet environments. They do not consume much electricity, are simple in design, and are relatively inexpensive. The basic block diagram

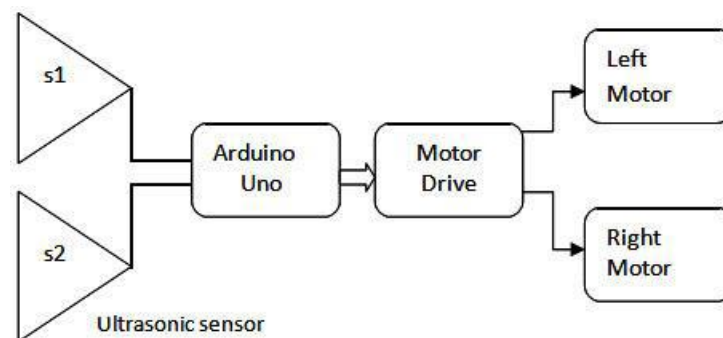


SYSTEM DESIGN

In our project the output from the ultrasonic sensor is given to the Arduino uno controller as an input to process them according to codes which are actually embedded into the controller to provide the desired output. The block diagram for the process

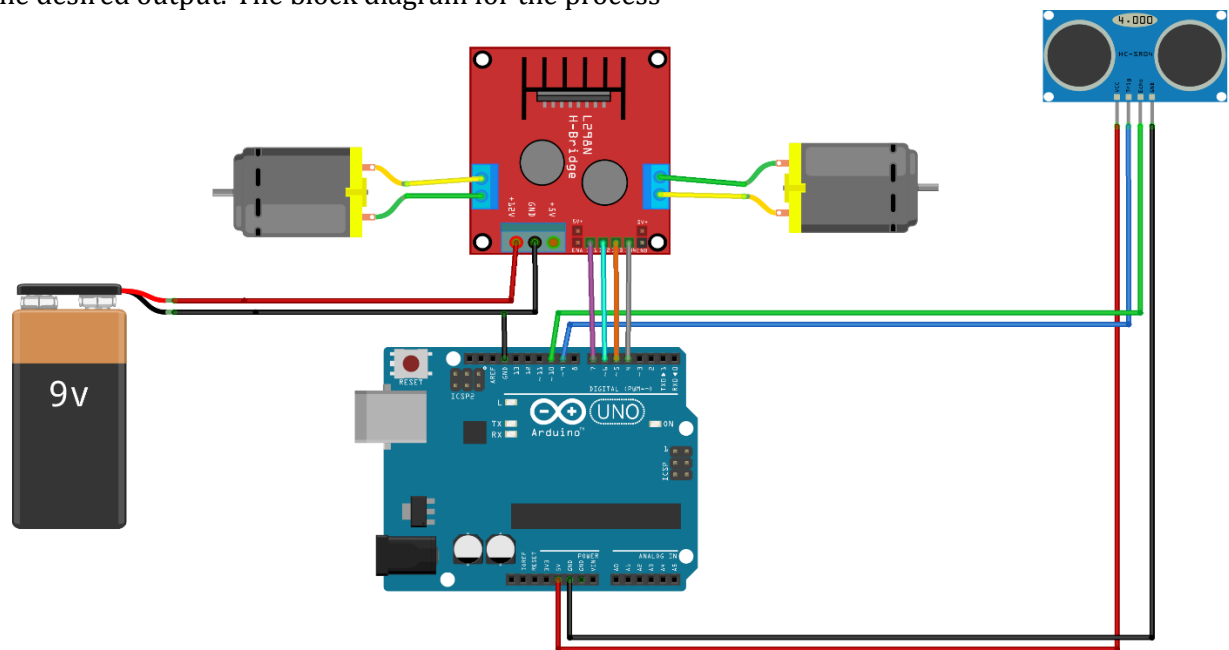


Ultrasonic sensor HC-SR04

The ultrasonic sensor is used for obstacle detection. Ultrasonic sensor transmits the ultrasonic waves from its sensor head and again receives the ultrasonic waves reflected from an object. There are many application use ultrasonic sensors like instruction alarm system, automatic door openers etc. The ultrasonic sensor is very compact and has a very high performance. It has both the transmitter and receiver. It consists of four pins Vcc pin to offer a 5V supply to the sensor, trigger pin give a TTL pulses (15us), echo pin to get the output from the sensor and ground pin. Ultrasonic sensor HC-SR04 :-

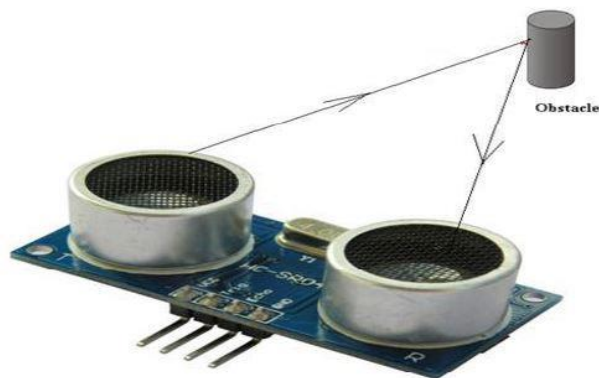


Timing Diagram

The ultrasonic sensor emits the short and high frequency signal. These propagate in the air at the velocity of sound. If they hit any object, then they reflect back echo signal to the sensor. The ultrasonic sensor consists of a multi vibrator, fixed to the base. The multi vibrator is combination of a resonator and vibrator. The resonator delivers ultrasonic wave generated by the vibration. The ultrasonic sensor actually consists of two parts; the emitter which produces a 40kHz sound wave and detector detects 40kHz sound wave and sends electrical signal back to the microcontroller :-

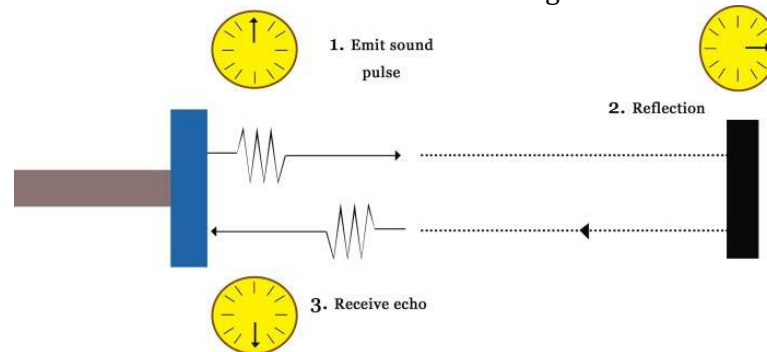


CIRCUIT DESCRIPTION

The circuit is excited by 9V power supply, the HC-SR04 module is connected to the port A of the 8051series, and the motor is also connected to the port A via relay switch. The circuit diagram :-

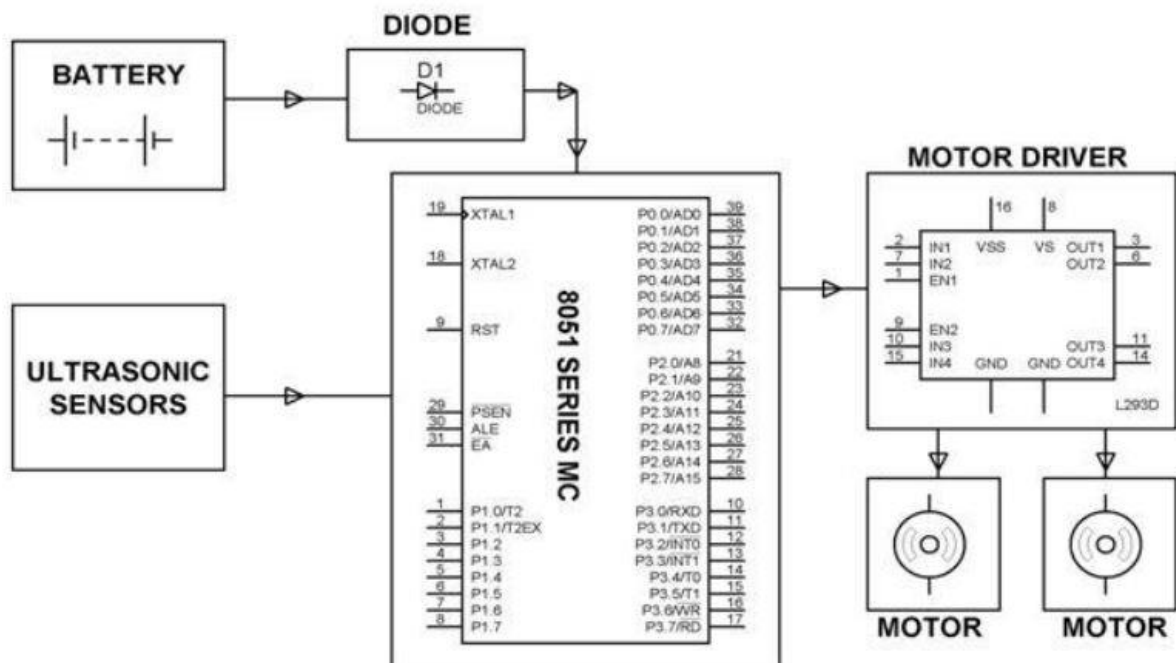

MOTOR DRIVE MODULE (L298N)

The L298N H-bridge module can be used with motors that have a voltage of between 5 and 35v dc. With the module used in this tutorial, there is also an onboard 5V regulator, so if your supply voltage is up to 12V you can also source 5V from the board. The Motor drive module diagram :-

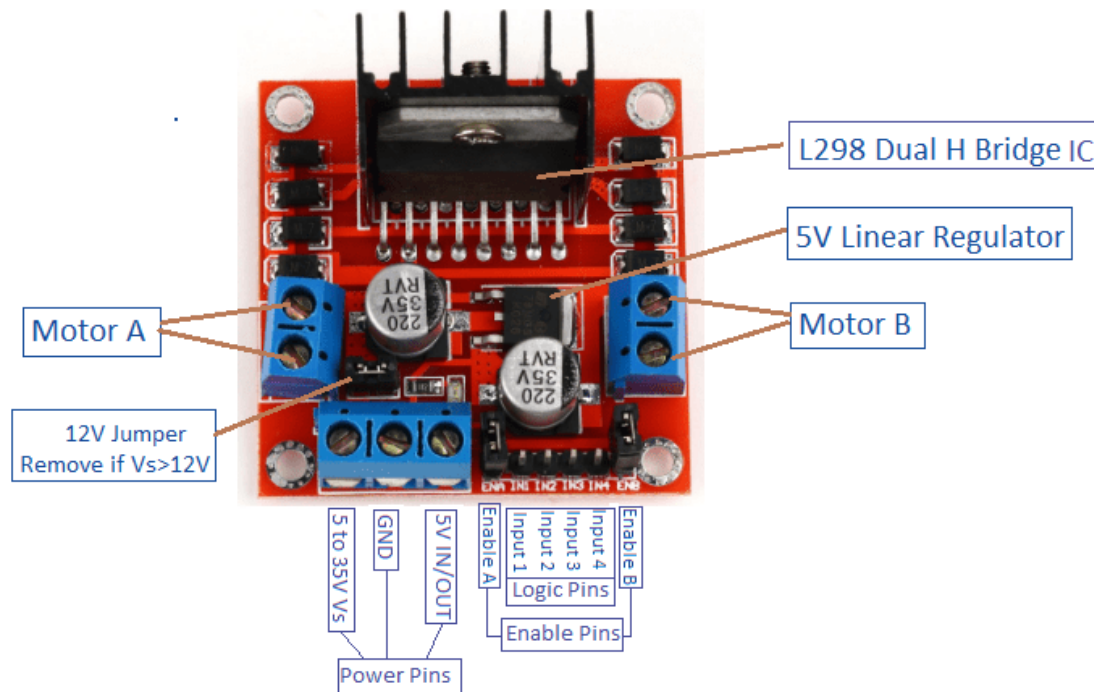

CONTROLLING DC MOTORS

H-Bridge L298N module is used to control one or two DC motors is quite easy. First connect each motor to the motor A and B connections on the L298N. If you're using two motors for a robot (etc) ensure that the polarity of the motors is the same on both inputs. Next connect your power supply – the positive to pin 4 on the module and negative/GND to pin 5. If you supply is up to 12V you can leave in the 12V jumper and 5V will be available from pin 6 on the module. This can be fed to your Arduino's 5V pin to power it from the motors power supply. Don't forget to connect Arduino GND to pin 5 on the module as well to complete the circuit. Now you will need six digital output pins on your Arduino, two of which need to be PWM (pulse – width Modulation) pins. PWM pins are denoted by the tilde ("~") next to the pin number, for example finally, connect the Arduino digital output pins to the driver module. In our example we have two DC motors, so digital pins D9, D8, D7 and D6 will be connect to the pins IN1, IN2, IN# and IN4 respectively. Then connect D10 to module pin 7 and D5 to module pin 12. The motor direction is controlled by sending a HIGH or LOW signal to the drive for each motor or channel.


However the motors will not turn until a HIGH is set to the enable pin and they can be turned off with a low to the same pin. However if you need to control the speed of the motors, the PWM signal from the digital pin connected to the enable pin can take care of it.

ARDUINO UNO

Arduino uno is a microcontroller board based on the ATmega328P(datasheet). It has 14 digital input/output pins of which 6 can be used as PWM outputs, 6 analog inputs, a 16 MHz quartz crystal, a USB connection, a power jack an ICSP header and a reset button

ATMEGA 328P-PU

Atmega328 is a single chip microcontroller created by ATMEL in the mega AUR family A common alternative to the ATmega328 is the “pico power” ATmega328P. The most common implementation of this is on the popular Arduino development platform, namely the Arduino UNO or Arduino Nano models.

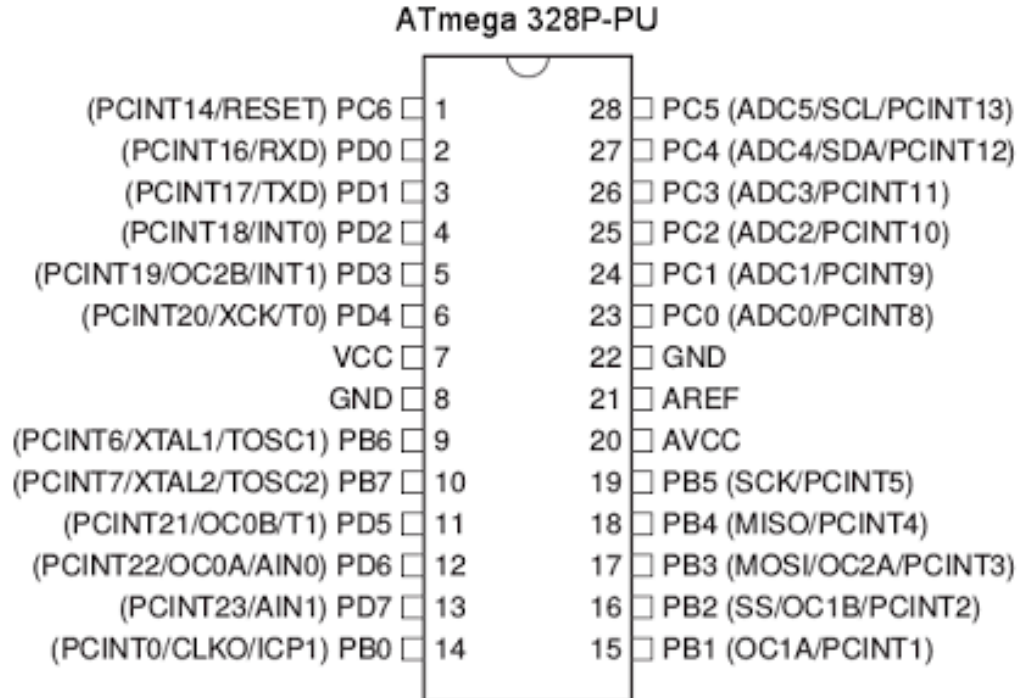

Key Parameter

Atmega 328P-PU Key parameters as shown in table. 1

| PARAMETER | VALUE |
|------------------------------|-----------------------------------|
| CPU type | 8-bit AVR |
| Performance | 20 MIPS at 20 MHz |
| Flash memory | 32 kB |
| SRAM | 2 kB |
| EEPROM | 1 kB |
| Pin count | 28-pin PDIP, MLF,32-pin TQFP, MLF |
| Maximum operating frequency | 20 MHz |
| Number of touch channel | 16 |
| Hardware Q Touch Acquisition | No |
| Maximum I/O pins | 23 |
| External interrupts | 2 |
| USB Interface | No |
| USB Speed | - |

Table -1: Key parameter

APPLICATION

- Obstacle avoiding robots can be used in almost all mobile robot navigation systems.
- They can be used for household work like automatic vacuum cleaning.
- They can also be used in dangerous environments, where human penetration could be fatal.

CONCLUSION

The above Arduino controller and ultrasonic sensor were studied and the HcSR-04 ultrasonic sensor was selected, as the controlling result are satisfying for its use in the automobile prototype system bring developed. It was used to sense the obstacle and avoidance them. On successful implementation of obstacle avoidance algorithm was successfully carried out too with minimal errors, by coding the algorithm in python. Obstacle avoidance is a very good application to be used in vehicle preventing many accidents and loss of life.