



Network

Positioning

TNU-4051T

VGA Thermal Positioning Camera



Key Features

- Max. 640 x 480 resolution support
- Built-in 35mm fixed lens
- H.265, H.264, MJPEG codec, WiseStreamII support
- Max. 30fps@all resolutions (H.265, H.264)
- microSD/SDHC/SDXC memory slot (Max. 256GB)
- 24V AC, NEMA 4X

※ Bridge firmware is required to upgrade from 1.00~1.2X versions to the latest version.
For more details, please refer to the [UPGRADE NOTIFICATION] or [Release Note]
included with your firmware (ZIP file).


Compatible Devices



SBU-500WM

TNU-4051T

VGA Thermal Positioning Camera

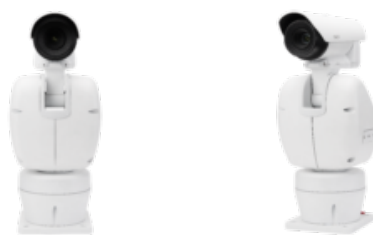

Specifications

Video	
Imaging Device	Uncooled micro bolometer
Resolution	640x480, 640x360, 320x240
Max. Framerate	H.265/H.264: Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max. 30fps/25fps(60Hz/50Hz)
NETD	<50mK
Pixel size	17μm
Video Out	CVBS: 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P) for installation
Lens	
Focal Length (Zoom Ratio)	35mm fixed focal
Max. Aperture Ratio	F1.0
Angular Field of View	H: 17.2° / V: 13° / D: 22°
Min. Object Distance	36m(118.11ft)
Focus Control	Fixed
Pan / Tilt / Rotate	
Pan Range	360° Endless
Pan Speed	0.025°~120°/sec
Tilt Range	-90° ~40°
Tilt Speed	0.025°~40°/sec
Sequence	Preset(300ea), Group(6ea)
Preset Accuracy	±0.3°
Operational	
Camera Title	Displayed up to 85 characters
Direction Indicator	Support
Digital Image Stabilization	Support(built-in gyro sensor)
Motion Detection	8ea, 8point polygonal zones
Analytics	Directional detection, Motion detection, Appear/Disappear, Enter/Exit, Loitering, Tampering, Virtual line, Audio detection, Temperature change detection, Sound classification, Shock detection
Alarm I/O	Input 1ea / Output 1ea
Alarm Triggers	Analytics, Network disconnect, Alarm input
Alarm Events	File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC or NAS recording at event triggers Alarm output PTZ Preset
Audio In	Selectable(mic in/line in) Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm
Audio Out	Line out, Max.output level: 1Vrms

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com.

Hanwha Vision is formerly known as Hanwha Techwin.

Color Palettes	Whitehot, Blackhot, Rainbow, Rainbow2, Sepia, Red, Iron, Custom
----------------	---

Network	
Ethernet	RJ-45(10/100BASE-T)
Video Compression	H.265/H.264: Main/Baseline/High, MJPEG
Audio Compression	G.711 u-law / G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz
Smart Codec	WiseStream II
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(20 users) / Multicast Multiple streaming(Up to 10 profiles)
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour, LLDP, SRTCP
Security	HTTPS(SSL) login authentication Digest login authentication IP address filtering User access log 802.1X authentication(EAP-TLS, EAP-LEAP)
Application Programming Interface	ONVIF Profile S/G/T SUNAPI(HTTP API) Wisenet open platform


General	
Webpage Language	English, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Edge Storage	Micro SD/SDHC/SDXC 1slot 256GB
Memory	1024MB RAM, 256MB Flash

Environmental & Electrical	
Operating Temperature / Humidity	-40°C ~ +55°C (-40°F ~ +131°F) / Less than 90% RH
Storage Temperature / Humidity	-50°C ~ +60°C (-58°F ~ +140°F) / Less than 90% RH
Certification	IP66, NEMA4X
Input Voltage	24VAC
Power Consumption	24VAC: Max 84W(Heater on), Max 62W(Heater off)

Mechanical	
Color / Material	White / Aluminum
RAL Code	RAL9003
Product Dimensions / Weight	(W)219×(H)528×(D)335mm(8.62x20.79x13.19"), 11.7Kg(25.79lb)




TNU-4051T

VGA Thermal Positioning Camera

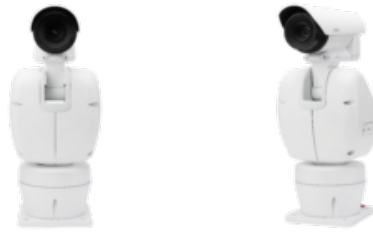

CAD

Unit:mm [inch]

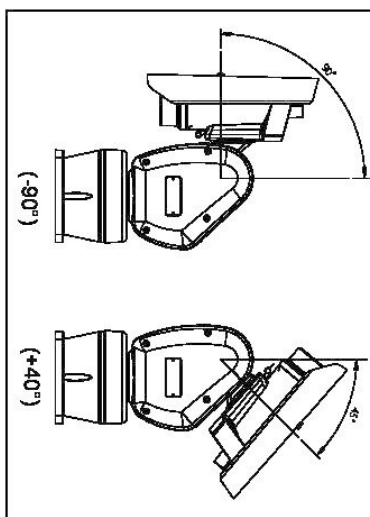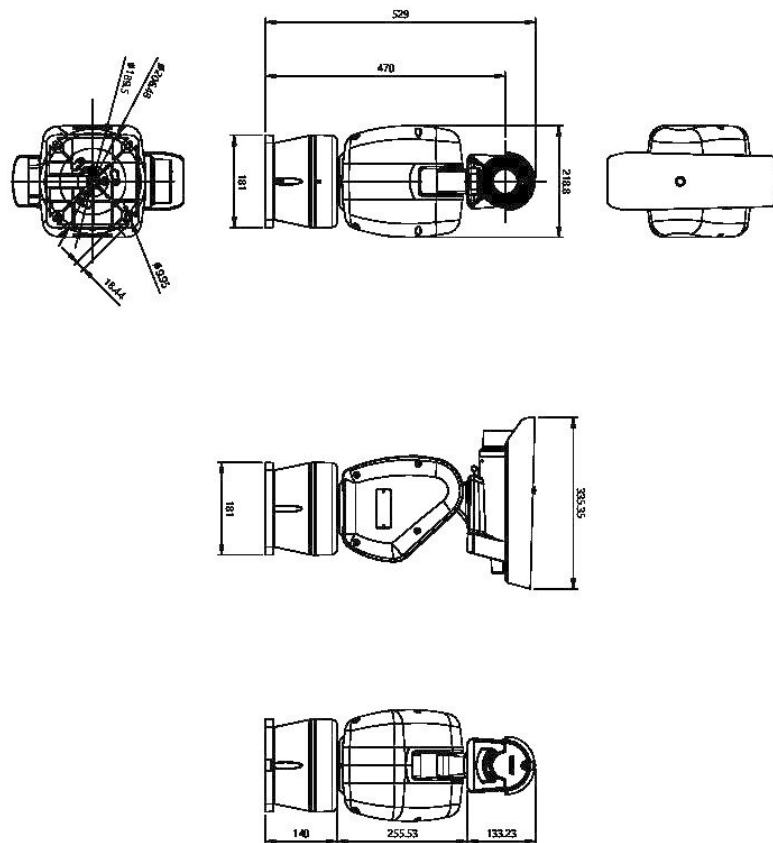

GENERAL TOLERANCES:			
CLASS	A	B	C
1-4	±0.05	±0.10	±0.25
4-18	±0.07	±0.13	±0.28
18-30	±0.10	±0.20	±0.51
30-50	±0.18	±0.35	±0.91
50-80	±0.30	±0.50	±1.50
80-100	±0.50	±1.00	±2.50

	FILE NAME	MATERIAL/材質	FINISH 表面仕上り	DRAW NO/図面 号	
	SCALE	TOLERANCE 公差	DESIGN	CHECK	APPROV 承認
1,000	UNIT mm				E
DATE				/	/
Hanshuo Technuin					
	SHEET				NO./部号
					A0
					SHEET 1 OF 1

ITEM	PART NO.	DESCRIPTION	QTY	REM

om.