



Network

Bullet

TNO-4050T

VGA H.265 Thermal Camera



Key Features

- Max. 640 x 480 resolution support
- Built-in 35mm fixed lens
- H.265, H.264, MJPEG codec
- Max. 30fps@all resolutions (H.265, H.264, MJPEG)
- Motion detection, Handover, Tampering, Loitering
- Directional detection, Audio detection, Sound classification
- Shock detection, Temperature change detection
- SD / SDHC / SDXC memory slot (Max. 256GB)
- Hallway View, WiseStreamII support
- PoE, 24V AC, 12V DC
- IP66, NEMA4X

※ Bridge firmware is required to upgrade from 1.00~1.2X versions to the latest version.
For more details, please refer to the [UPGRADE NOTIFICATION] or [Release Note]
included with your firmware (ZIP file).

Compatible Devices



SBP-303PM

TNO-4050T

VGA H.265 Thermal Camera



Specifications

| | |
|-----------------------------|--|
| Video | |
| Imaging Device | Uncooled micro bolometer |
| Resolution | 640x480, 640x360, 320x240 |
| Max. Framerate | H.265/H.264: Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max. 30fps/25fps(60Hz/50Hz) |
| NETD | <50mK |
| Pixel size | 17μm |
| Video Out | CVBS: 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P) for installation USB: Micro USB Type B, 1280x720 for installation |
| Lens | |
| Focal Length (Zoom Ratio) | 35mm fixed focal |
| Max. Aperture Ratio | F1.0 |
| Angular Field of View | H: 17.2° / V: 13° / D: 22° |
| Min. Object Distance | 36m(118.11ft) |
| Focus Control | Fixed |
| Operational | |
| Camera Title | Displayed up to 85 characters |
| Digital Image Stabilization | Support(built-in gyro sensor) |
| Motion Detection | 8ea, 8point polygonal zones |
| Privacy Masking | 32ea, polygonal zones - Color: Grey/Green/Red/Blue/Black/White - Mosaic |
| Video Rotation | Flip, Mirror, Hallway view(90°/270°) |
| Analytics | Directional detection, Motion detection, Appear/Disappear, Enter/Exit, Loitering, Tampering, Virtual line, Audio detection, Temperature ditionction, Sound classification, Shock detection |
| Alarm I/O | Input 1ea / Output 2ea |
| Alarm Triggers | Analytics, Network disconnect, Alarm input |
| Alarm Events | File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC or NAS recording at event triggers Alarm output Handover |
| Audio In | Selectable(mic in/line in) Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm |
| Audio Out | Line out, Max.output level: 1Vrms |
| Color Palettes | Whitehot, Blackhot, Rainbow, Sepia, Red, Iron, Wisenet |
| Network | |
| Ethernet | RJ-45(10/100BASE-T) |
| Video Compression | H.265/H.264: Main/Baseline/High, MJPEG |

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com.

Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

| | |
|-----------------------------------|---|
| Audio Compression | G.711 u-law /G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz |
| Smart Codec | Manual(5ea area), WiseStream II |
| Bitrate Control | H.264/H.265: CBR or VBR MJPEG: VBR |
| Streaming | Unicast(20 users) / Multicast Multiple streaming(Up to 10 profiles) |
| Protocol | IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour, LLDP, SRTP |
| Security | HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP) |
| Application Programming Interface | ONVIF Profile S/G/T SUNAPI(HTTP API) Wisenet open platform |

General

| | |
|--------------|---|
| Web Viewer | Supported OS: Windows 7, 8.1, 10, Mac OS X 10.10, 10.11, 10.12 Recommended Browser: Google Chrome Supported Browser: MS Explore11, MS Edge, Mozilla Firefox(Window 64bit only), Apple Safari(Mac OS X only) |
| Edge Storage | Micro SD/SDHC/SDXC 1slot 256GB |
| Memory | 1024MB RAM, 256MB Flash |

Environmental & Electrical

| | |
|----------------------------------|--|
| Operating Temperature / Humidity | -40°C ~ +60°C (-40°F ~ +140°F) / 90% RH 이하 |
| Storage Temperature / Humidity | -50°C ~ +60°C (-58°F ~ +140°F) / 90% RH 이하 |
| Certification | IP66, NEMA4X |
| Input Voltage | PoE(IEEE802.3af, Class3), 24VAC, 12VDC |
| Power Consumption | PoE: Max. 10W, typical 8.6W 12VDC: Max. 9W, typical 7.5W 24VAC: Max. 10.5W, typical 8.9W |

Mechanical

| | |
|-----------------------------|---|
| Color / Material | White / Aluminum |
| RAL Code | RAL9003 |
| Product Dimensions / Weight | Φ101.97x401.8mm(4.01x15.82") / 3175g(7.01 lb) |


TNO-4050T

VGA H.265 Thermal Camera



CAD

Unit:mm [inch]

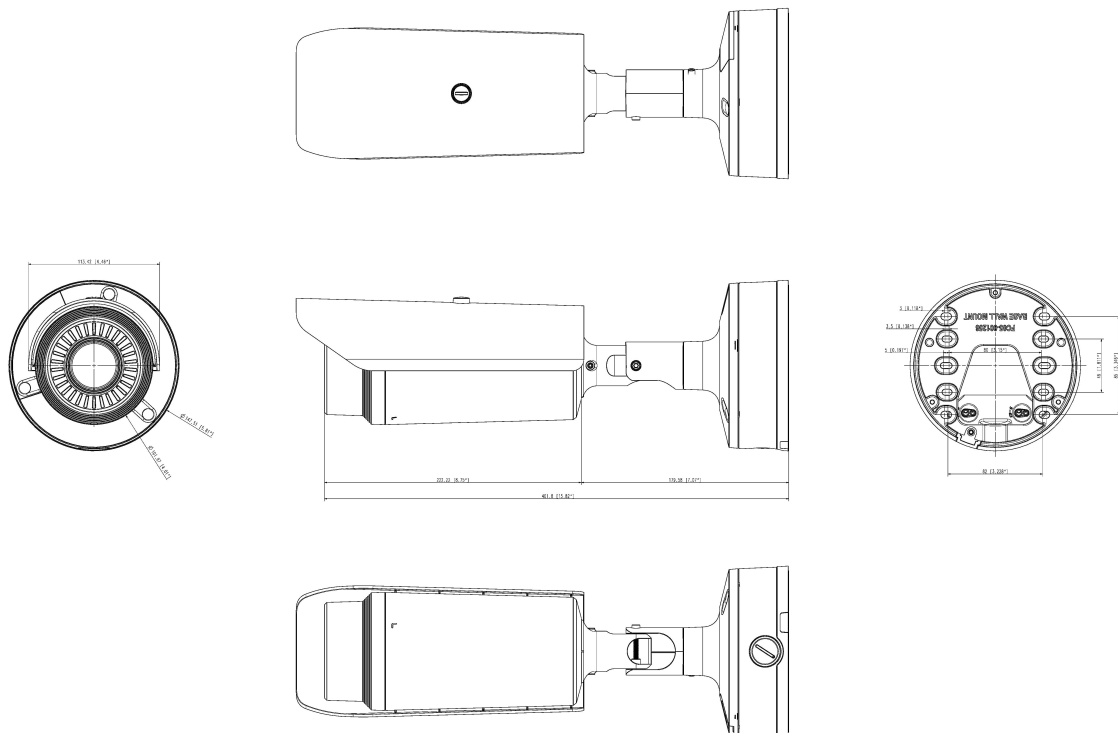

Apperance TNO-4050T
Unit : mm [inch]