



Analog

Bullet

SCO-6085R

2MP Analog IR Bullet Camera



Key Features

- Full HD(1920 x 1080) resolution
- 0.11Lux@F1.6, 0Lux(B/W IR LED on)
- 3.2~10mm(3.1x) varifocal lens
- Day & Night (ICR), DWDR< Motion detection
- IR viewable length 30m, IP66, IK10
- Transmission distance max. 500m
- Easy installation (Plug & play)

Compatible Devices



SBP-302PM



SBO-100B1

SCO-6085R

2MP Analog IR Bullet Camera



Specifications

| | |
|----------------------------------|--|
| Video | |
| Imaging Device | 1/2.8" 2M CMOS |
| Min. Illumination | Color: 0.11Lux (F1.6, 1/30sec) BW: 0Lux(IR LED on) |
| Video Out | BNC(AHD / CVBS Selectable) |
| Video Transmission Distance | 500m(5C2V Coaxial Cable) |
| Lens | |
| Focal Length (Zoom Ratio) | 3.2~10mm(3.1x) manual varifocal |
| Max. Aperture Ratio | F1.6 |
| Angular Field of View | H: 110.2°(Wide)~32.0°(Tele) / V: 55.4°(Wide)~18.0°(Tele) / D: 128.4°(Wide)~36.6°(Tele) |
| Min. Object Distance | 0.5m(1.64ft) |
| Focus Control | Manual |
| Lens Type | DC auto iris |
| Operational | |
| Camera Title | Displayed 15 characters |
| Day & Night | Auto(ICR) |
| Backlight Compensation | BLC, HLC, DWDR |
| Digital Noise Reduction | SSNRIV |
| Defog | Support |
| Motion Detection | 4ea |
| Privacy Masking | 8ea |
| Gain Control | Low / Middle / High / Very high |
| White Balance | ATW / AWC / Manual / Indoor / Outdoor |
| Electronic Shutter Speed | 1~1/12,000sec |
| Video Rotation | H-Rev/V-Rev |
| Analytics | Motion detection |
| Alarm I/O | Output 1ea |
| Alarm Triggers | Analytics |
| Alarm Events | Alarm output |
| IR Viewable Length | 30m(98.42ft) |
| Coaxial Protocol | ACP(AHD Coax Protocol), CVBS: Pelco-C(Coaxitron) |
| Environmental & Electrical | |
| Operating Temperature / Humidity | -30°C ~ +55°C (-22°F ~ +131°F) / Less than 90% RH |
| Certification | IP66, IK10 |
| Input Voltage | 24VAC, 12VDC |

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com.

Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

| | |
|-------------------|--|
| Power Consumption | 24VAC: Max 5.4W, typical 3.4W 12VDC: Max 5.4W, typical 3.4W |
|-------------------|--|

Mechanical

| | |
|-----------------------------|---|
| Color / Material | Dark grey / Aluminum |
| Product Dimensions / Weight | Ø78x259.8mm(3.07x10.23"), 887g(1.95 lb) |


SCO-6085R

2MP Analog IR Bullet Camera



CAD

Unit:mm [inch]

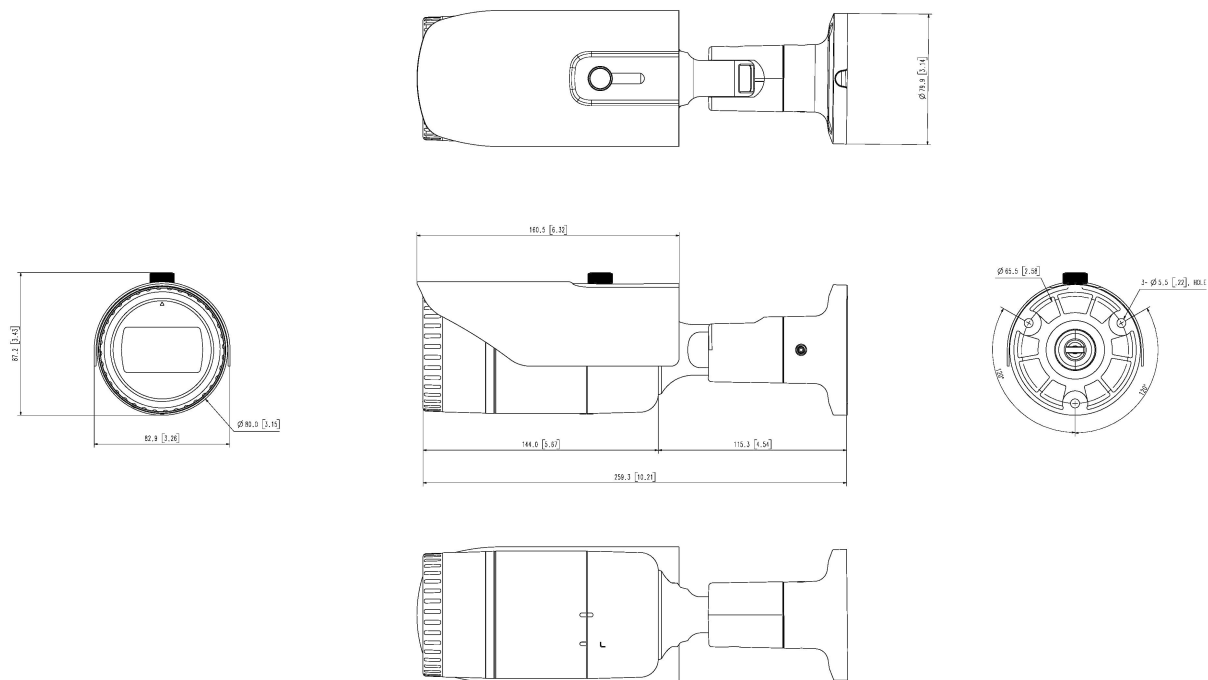

Apperance SCO-6085R, SCO-6085RVP, SUO-6085R
UNIT : mm[inch]