



U_TIA
TIA.SchDoc






U_TIA
TIA.SchDoc



U_ADC
ADC.SchDoc

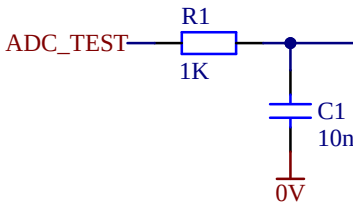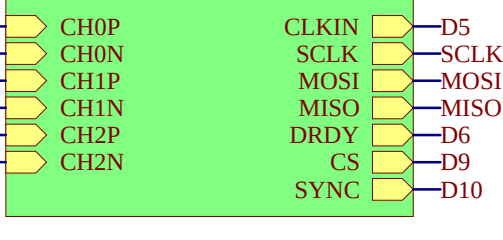

Adafruit ESP32-S2 and -S3
Feather pin headers

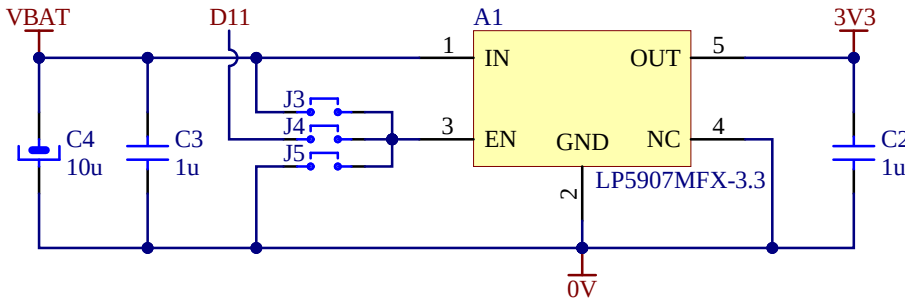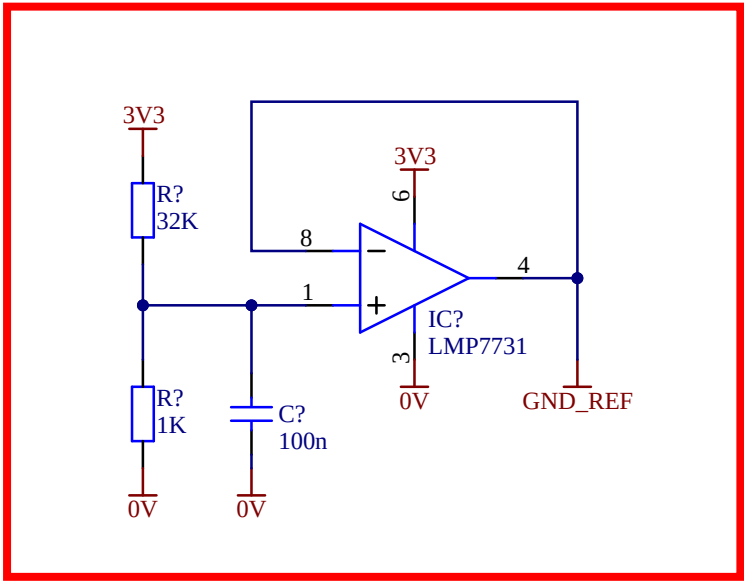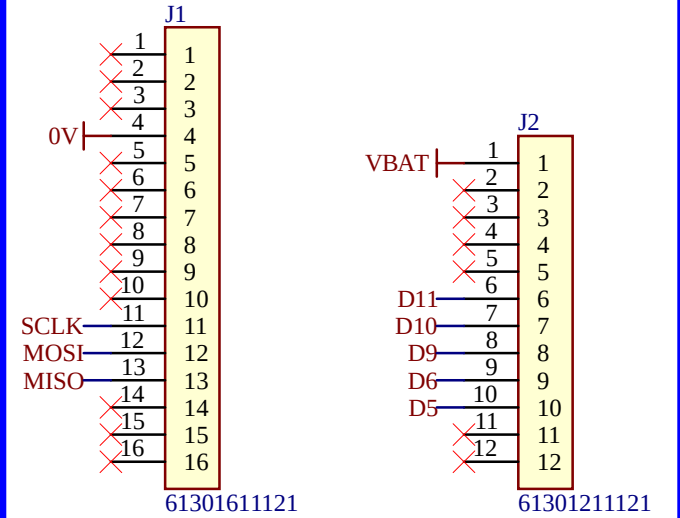

J3 - turn ON
J4 - control with GPIO11
J5 - turn OFF



Title UV Sensor		Author: K.Stepančić	
		Checked By: M.Babić	
		Approved By: D.Babić	
Size A4	Number		Revision R01
Date: 6/25/2026	Sheet of		
File: C:\Users\...\UVSensor.SchDoc	Drawn By:		

Cascaded Transimpedance Amplifier

1.14V output for 10nA input current

△ SG01S-18 : 114M current-to-voltage ratio
SG01L-18 : 7.15M current-to-voltage ratio



SG01S-18 : 114M current-to-voltage ratio
SG01L-18 : 7.15M current-to-voltage ratio

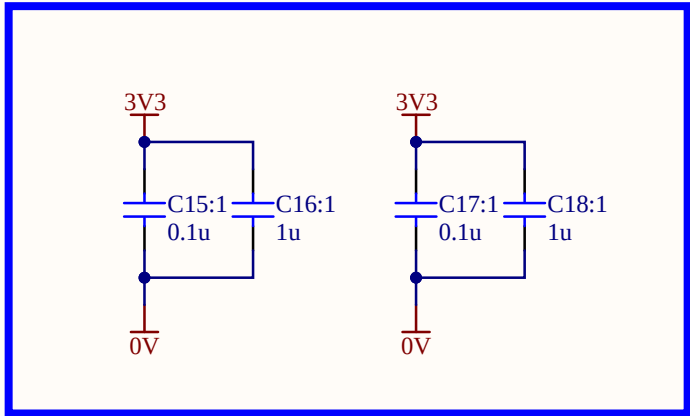


Title TIA LMP7721 Author: K.Stepančić Checked By: M.Babić Approved By: D.Babić		
Size A4	Number	Revision R00
Date:	6/25/2026	Sheet of
File:	C:\Users\...\TIA.SchDoc	Drawn By:

Cascaded Transimpedance Amplifier
1.14V output for 10nA input current

SG01S-18 : 114M current-to-voltage ratio
SG01L-18 : 7.15M current-to-voltage ratio

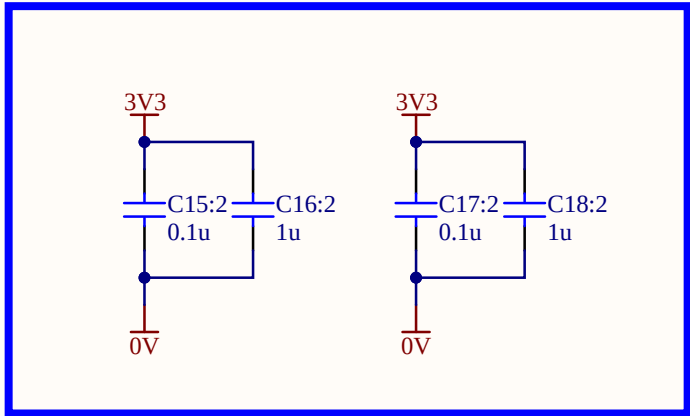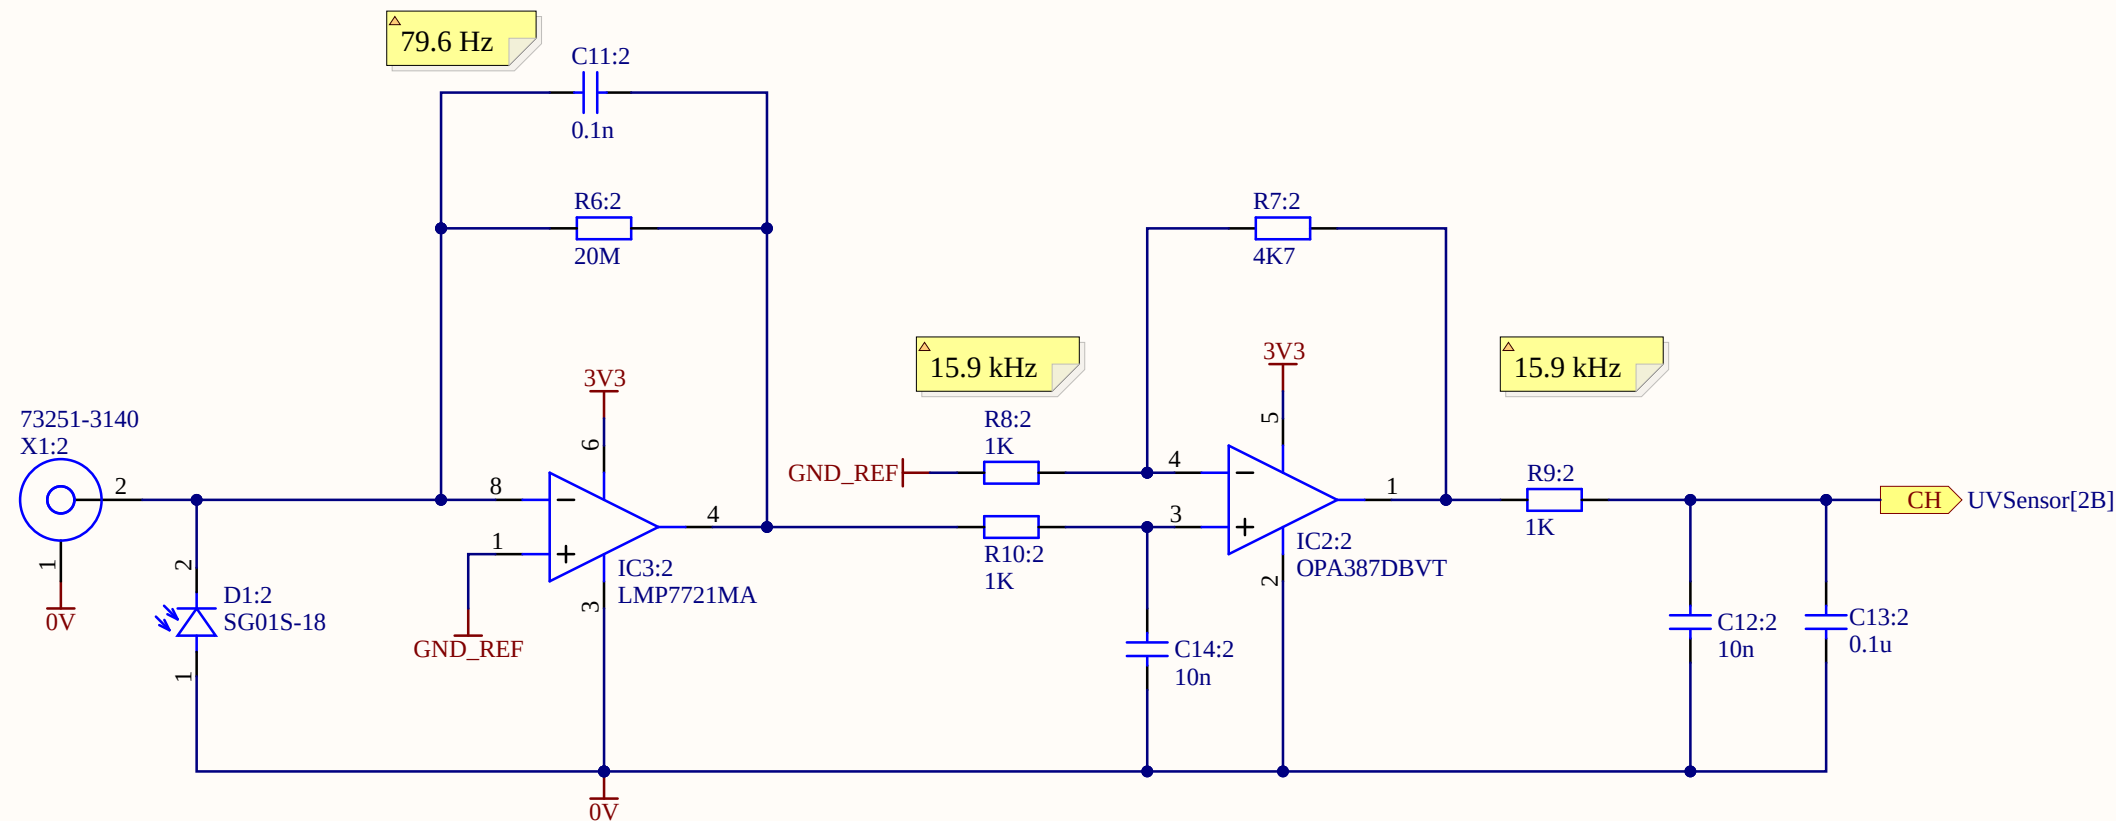

Title TIA LMP7721		Author: K.Stepančić	
		Checked By: M.Babić	
		Approved By: D.Babić	
Size A4	Number		Revision R00
Date: 6/25/2026	Sheet of		
File: C:\Users\...\TIA.SchDoc	Drawn By:		

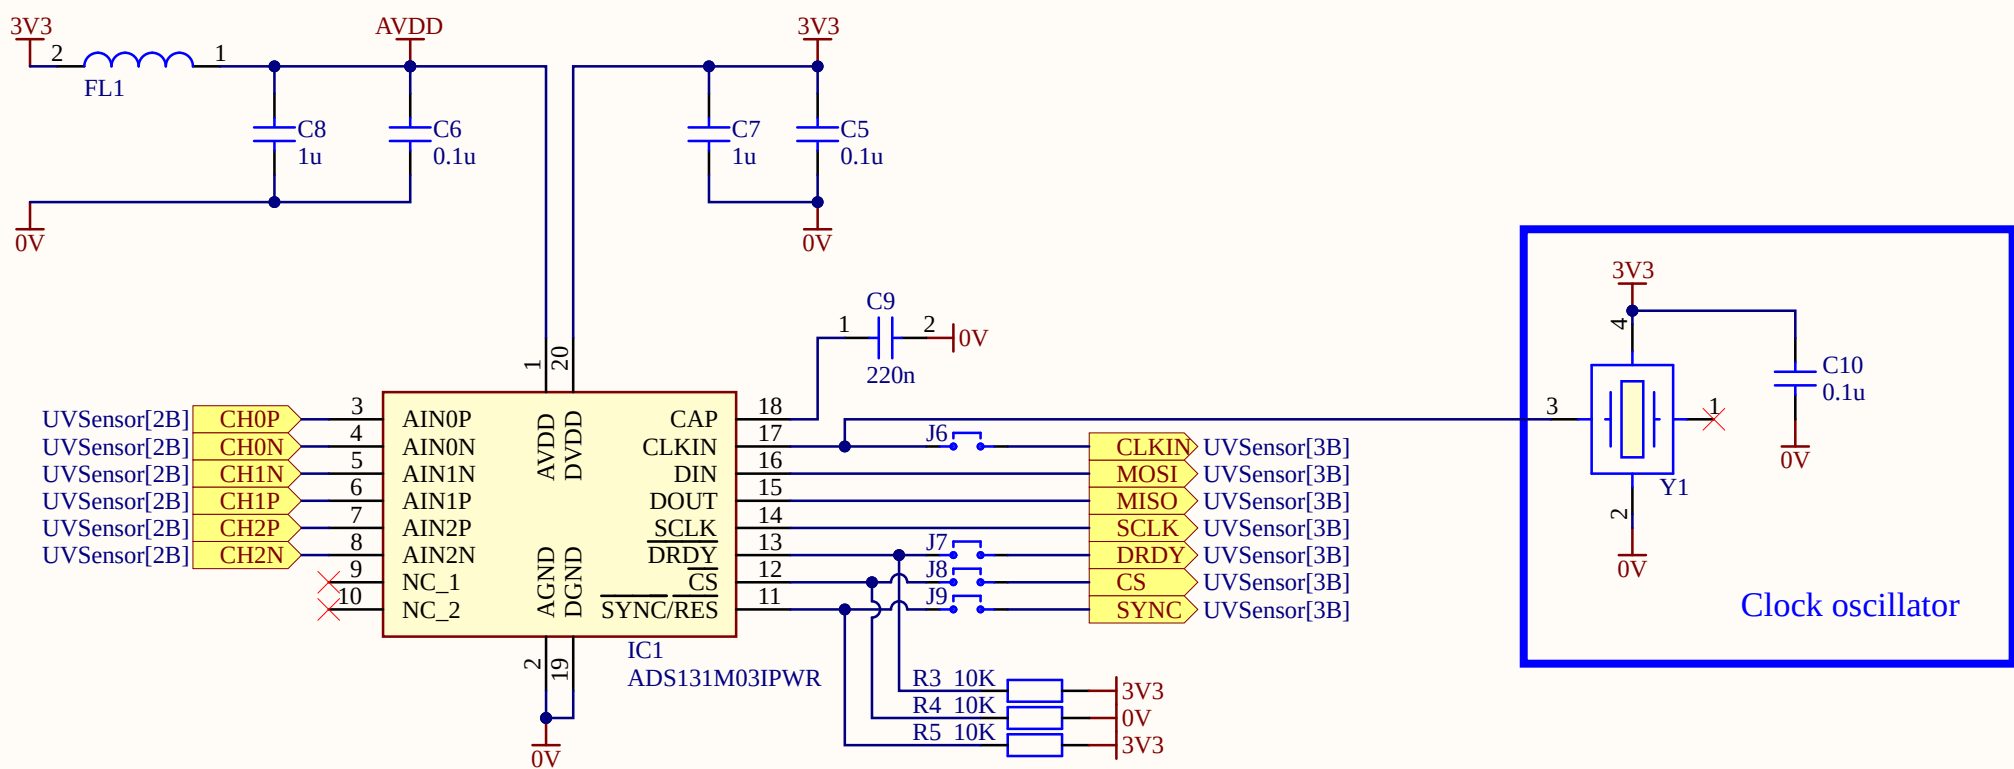

△ J6 to connect CLKIN from MCU
J7 or J9 to select DRDY or SYNC
J8 to enable CS

Title ADC		Author:	K.Stepančić
		Checked By:	M.Babić
		Approved By:	D.Babić
Size A4	Number	Revision R00	
Date:	6/25/2026	Sheet of	
File:	C:\Users\...\ADC.SchDoc	Drawn By:	