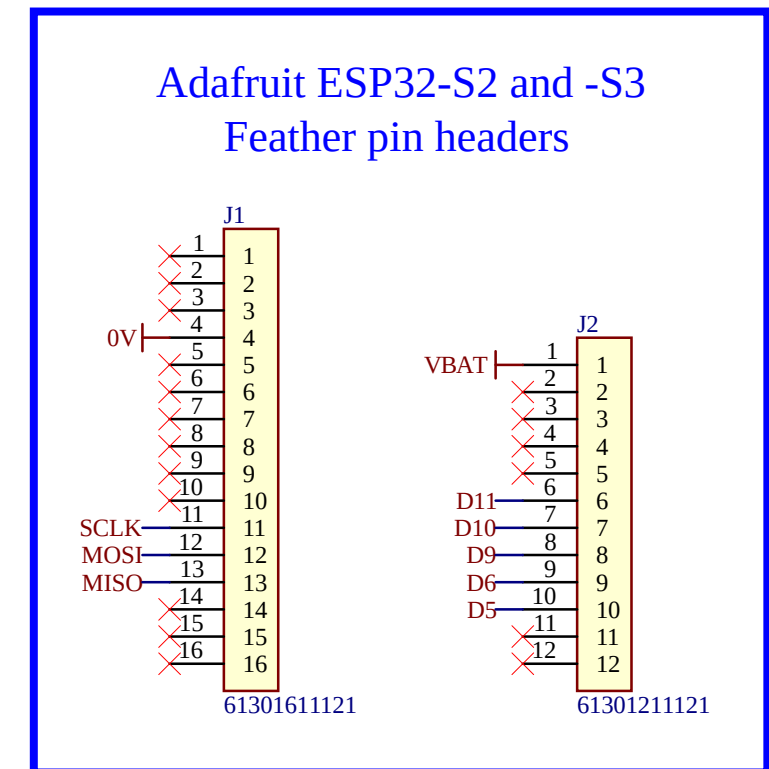
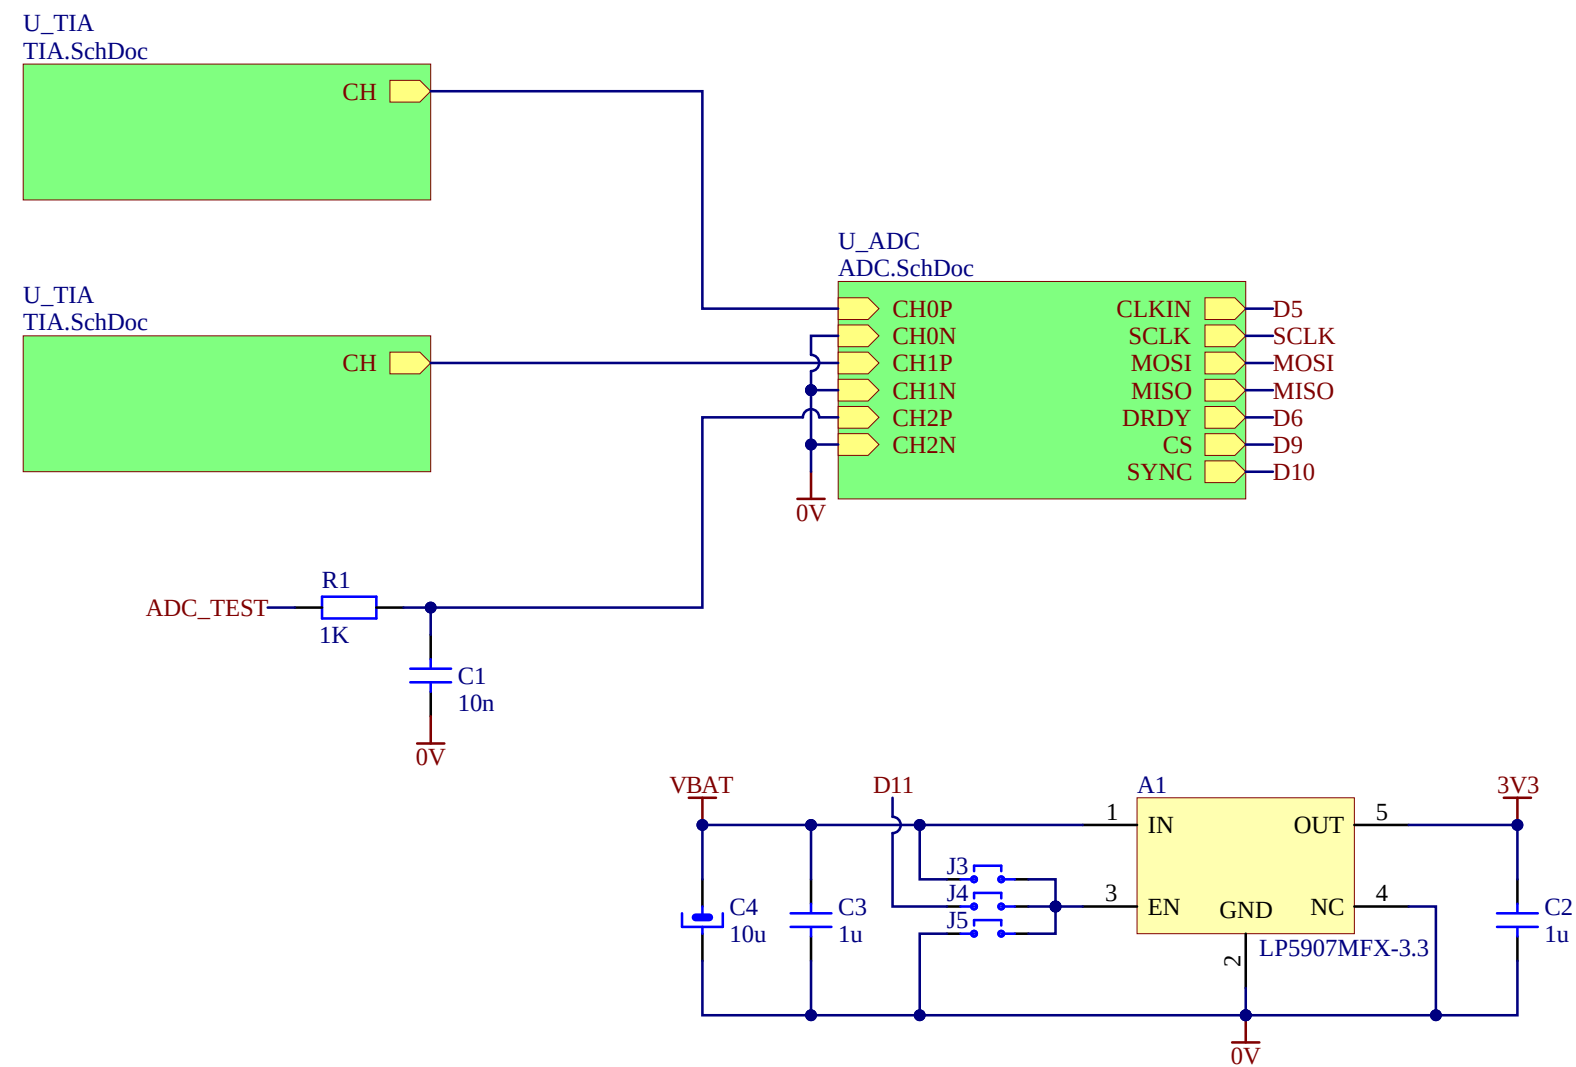



Title UV Sensor		Author:	K.Stepančić
		Checked By:	M.Babić
		Approved By:	D.Babić
Size	Number	Revision	
A4		R00	
Date:	12.22.2025	Sheet of	
File:	C:\Users\...\UVSensor.SchDoc	Drawn By:	

Cascaded Transimpedance Amplifier

1.14V output for 10nA input current

△ SG01S-18 : 114M current-to-voltage ratio
SG01L-18 : 7.15M current-to-voltage ratio

SG01S-18 : 114M current-to-voltage ratio
SG01L-18 : 7.15M current-to-voltage ratio

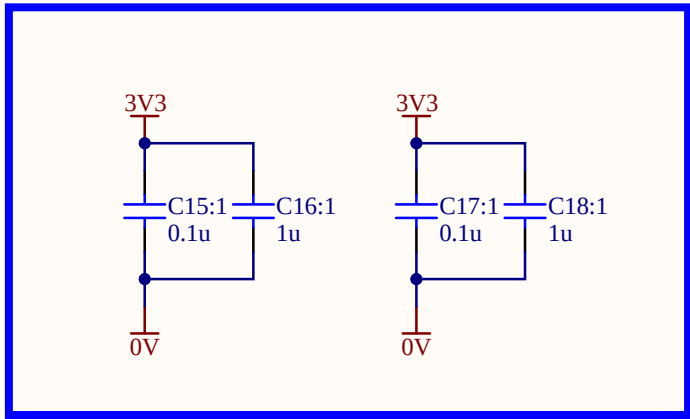

TIA LMP7721		Author: K.Stepančić	
		Checked By: M.Babić	
		Approved By: D.Babić	
Size A4	Number	Revision R00	
Date:	12.22.2025	Sheet of	
File:	C:\Users\...\TIA.SchDoc	Drawn By:	

A

B

C

D

A

B

C

D

1

2

3

4

1



2

3


4

Cascaded Transimpedance Amplifier
1.14V output for 10nA input current

SG01S-18 : 114M current-to-voltage ratio
SG01L-18 : 7.15M current-to-voltage ratio

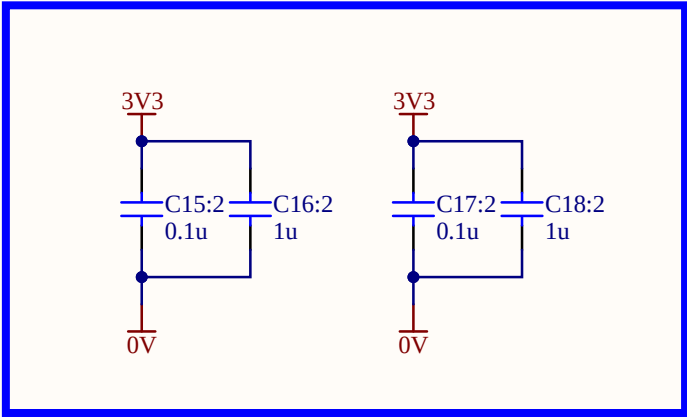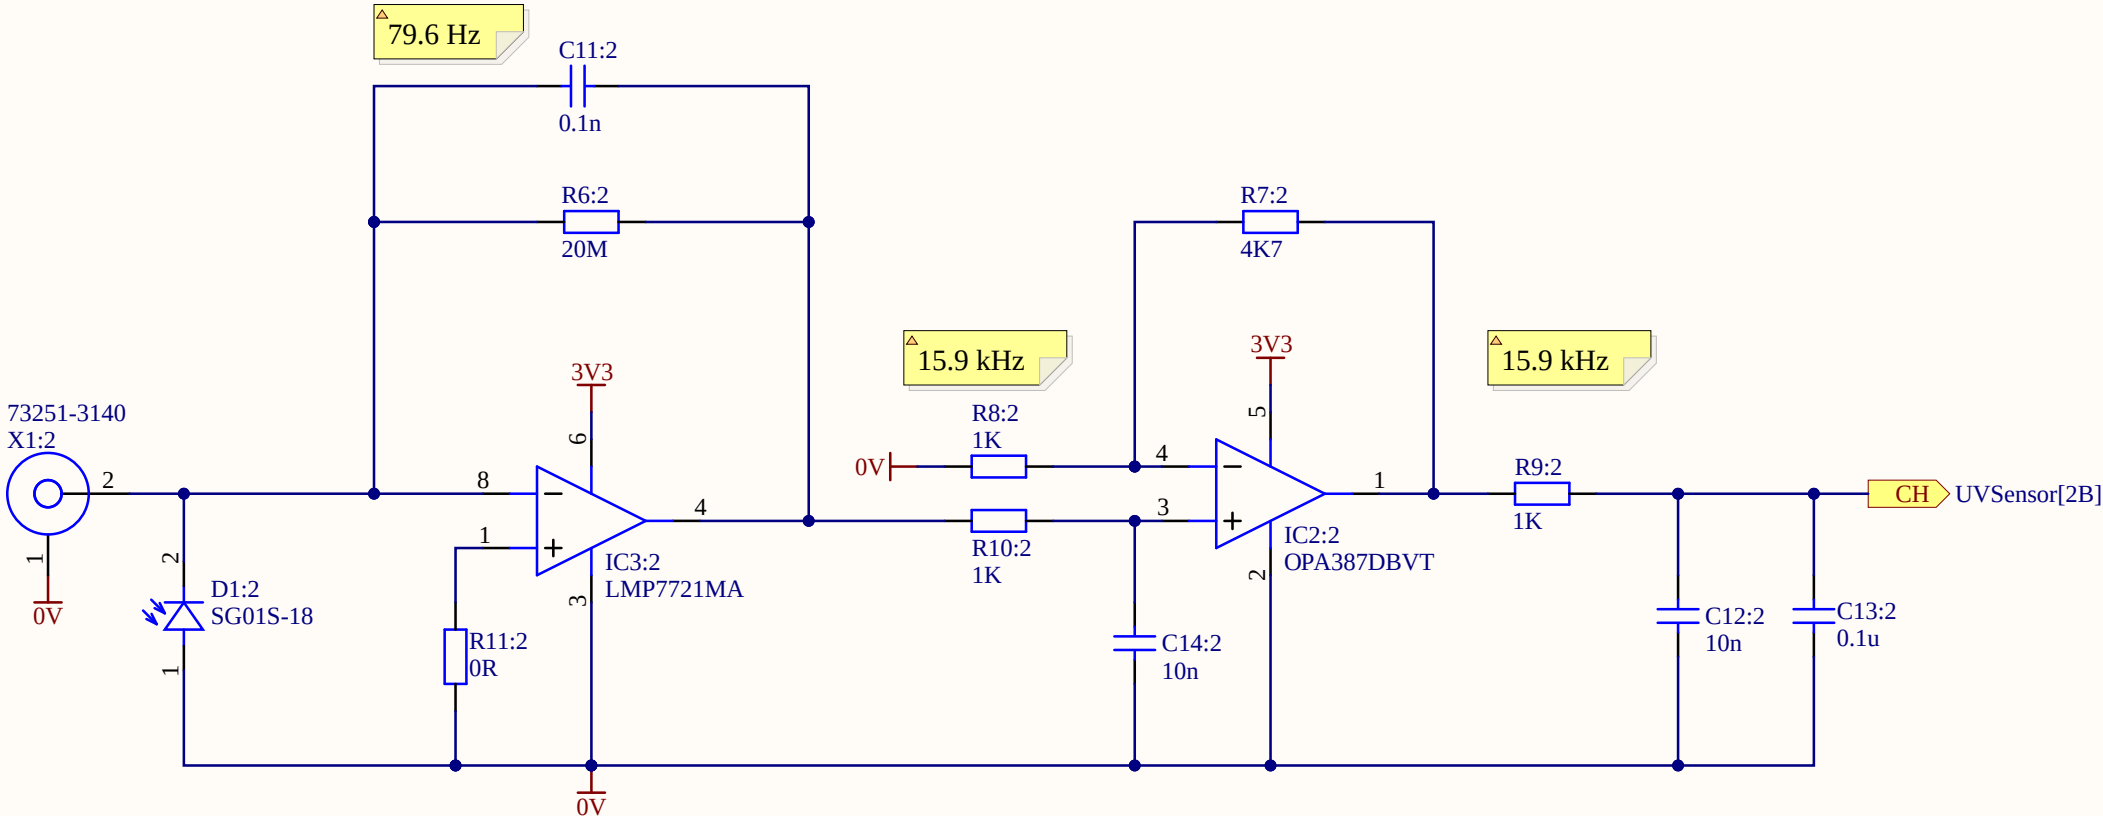

Title TIA LMP7721		Author:	K.Stepančić
		Checked By:	M.Babić
		Approved By:	D.Babić
Size A4	Number		Revision R00
Date:	12.22.2025		Sheet of
File:	C:\Users\...\TIA.SchDoc		Drawn By:

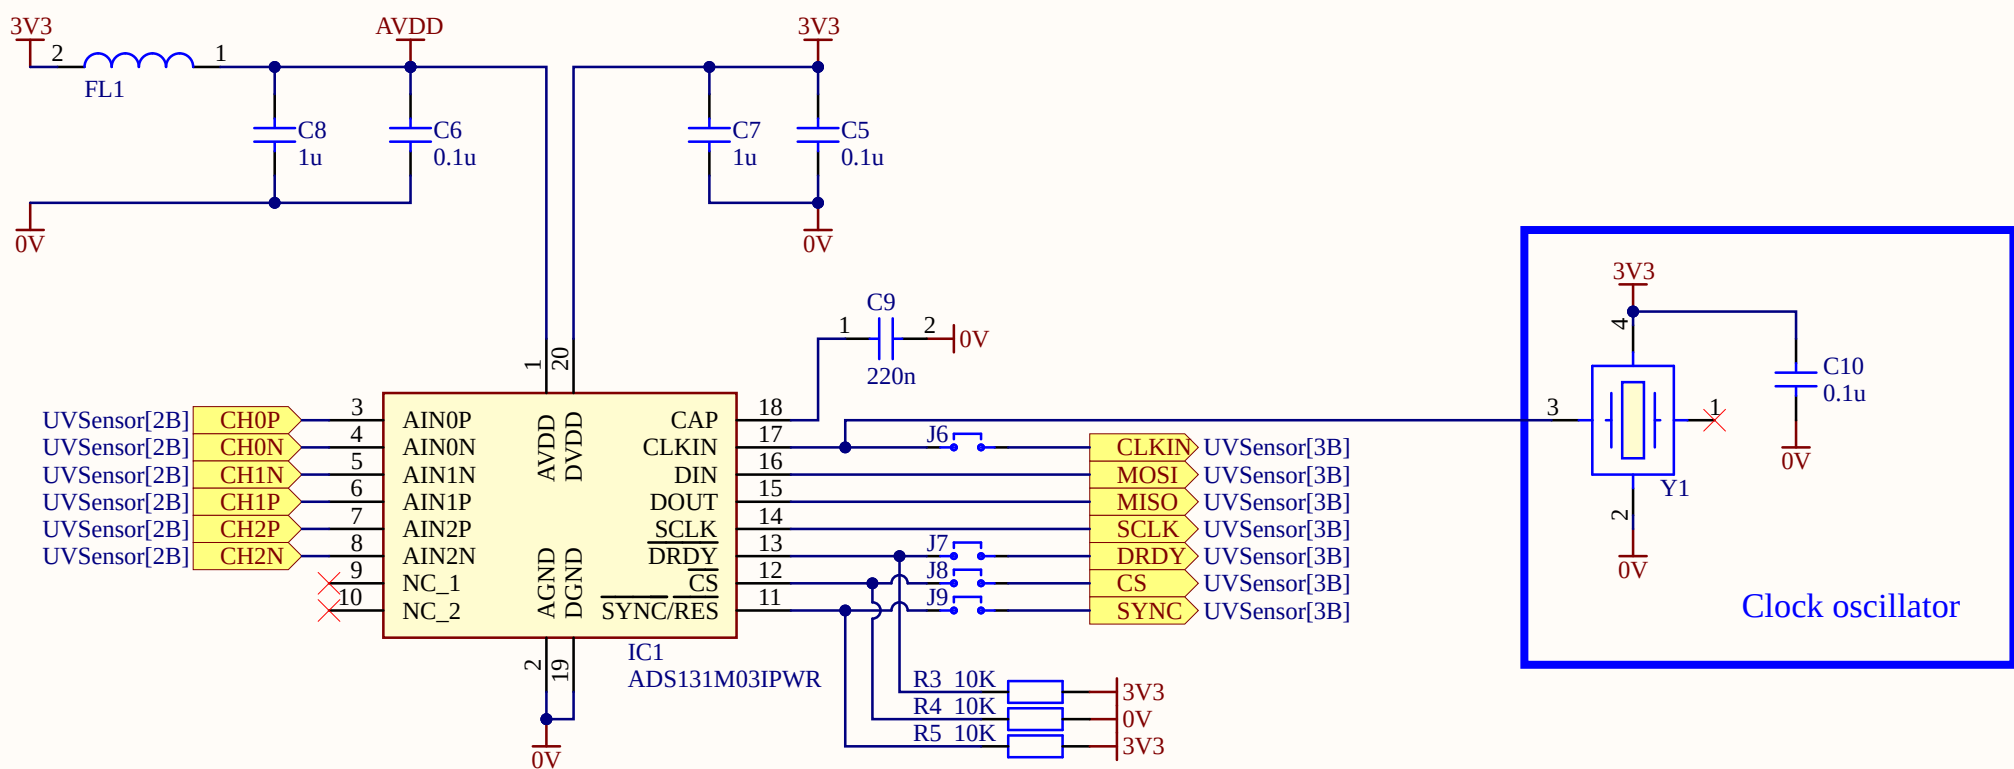

J6 to connect CLKIN from MCU
J7 or J9 to select DRDY or SYNC
J8 to enable CS

Title ADC		Author:	K.Stepančić
		Checked By:	M.Babić
		Approved By:	D.Babić
Size A4	Number		Revision R00
Date:	12.22.2025	Sheet of	
File:	C:\Users\...\ADC.SchDoc	Drawn By:	