


Gate A: $\hat{\rho}$ saturates far below ρ_0
(design noise never dominates the transport signal)



Gate B: reliability floor needs $K \geq 94$
(the feasible region is empty at survey scale)

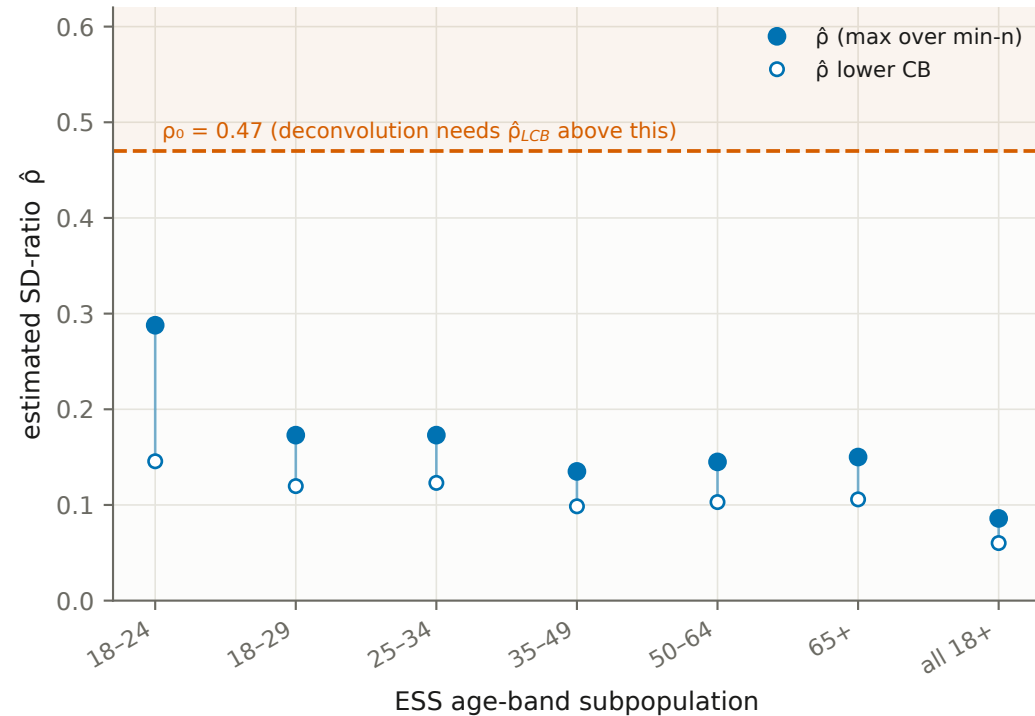