

● BOB AI HACKATHON SUBMISSION • TRACK: AI

D1 Mission Readiness & Predictive Maintenance Copilot

Condition-Based Maintenance (CBM+) powered by GPU-Accelerated Prognostics, watsonx.ai Granite 3.0, and the IBM Bob FastMCP Autonomous Protocol.

TEAM

Galcogens

TEAM LEAD

Kunj (d24aiml082@charusat.edu.in)

MEMBERS

Vedant, Path, Venisha

The Problem: High Cost of Unpredictable Readiness

Military organizations struggle to guarantee platform airworthiness before critical mission commitment.

\$90B

ANNUAL DOD MAINTENANCE

Over \$90 billion spent annually on military fleet maintenance with massive logistics recovery overhead.

>50%

UNSCHEDULED FAILURES

More than half of platform breakdowns occur unexpectedly during operations, aborting planned sorties.

0%

REAL-TIME HUMS ANALYSIS

High-frequency telemetry (vibration, thermal creep, pressure) sits unanalyzed in siloed flight recorders.

Weeks

RECOVERY LATENCY

Unplanned grounding forces emergency supply rushes, grounding wings and draining operational tempo.

Conventional Maintenance Doctrine

- **Static Calendar Schedules:** 100-hour phase inspections regardless of actual subsystem wear.
- **Binary Grounding:** Platforms are either full go or completely grounded with no mission nuance.
- **Paper Logbooks & Disconnect:** Maintenance records disconnected from onboard sensor health.

Operational Mission Impact

- **Air Tasking Order Failures:** Degradation discovered on the tarmac minutes before takeoff.
- **Premature Component Scrapping:** Healthy parts removed simply because calendar intervals expired.
- **Combat Readiness Dip:** Squadron availability often hovers below minimum operational requirements.

The D1 Solution: Autonomous CBM+ Operational Loop

A closed-loop system connecting raw sensor telemetry to autonomous AI decision support.



Predictive Intelligence: NASA C-MAPSS Benchmark

Trained on real aerospace turbofan degradation benchmarks — verified in serialized model weights.

Rigorous Feature Engineering (108 Features)

14 sensor channels with physical aerodynamic degradation signatures, transformed using exponential moving statistics over 5, 10, and 20 cycle windows.

- s_4: LPT Exit Temp (26.7%)
- s_11: HPC Outlet Pressure (11.4%)
- s_15: Bypass Ratio (6.1%)
- s_9: Core Speed (3.0%)

GPU-Accelerated Model Pipeline

- Algorithm: XGBoost Regressor (tree_method='hist')
- Training Duration: 3.37s on NVIDIA RTX 3050 (CUDA)
- Dataset: NASA C-MAPSS FD001 (20,631 run-to-failure cycles)
- Unsupervised Anomaly Detector: Isolation Forest (100 estimators)

VERIFIED BENCHMARK PERFORMANCE (src/backend/app/ml/weights/model_metrics.json)

18.21

HOLDOUT TEST RMSE (CYCLES)

12.75

HOLDOUT TEST MAE (CYCLES)

0.7935

TEST SET R² SCORE

1089.2

NASA PHM08 PENALTY SCORE

*PHM08 competition metric exponentially penalizes late predictions where failure occurs before forecast, ensuring flight safety.

Mission-Aware Readiness: Beyond Component Health

Correlating real-time subsystem wear against military operational deployment horizons.

FMC

Score $\geq$ 85%

Fully Mission Capable

All primary and secondary combat avionics, hydraulics, and propulsion systems verified nominal. Cleared for all primary combat sortie profiles.

PMC

Score 50% – 84%

Partially Mission Capable

Secondary subsystem degradation detected. Airframe restricted from high-G combat sorties, but cleared for low-stress secondary missions (ISR/Ferry).

NMC

Score < 50%

Non-Mission Capable

Critical safety limits exceeded or component failure predicted within operational mission window. Airframe grounded; turnaround work orders dispatched.

Mission Window Conflict Resolution

A component with 25 hours RUL might appear “healthy” under static thresholds. However, if assigned to a 48-hour mission window (e.g., **Operation Desert Shield**), D1 instantly flags a **Mission Horizon Conflict**, alerts the squadron commander, and initiates proactive turnaround before commitment.

IBM Bob + FastMCP + watsonx.ai Granite 3-8B

Load-bearing autonomous agent architecture — not a superficial wrapper.

FastMCP Autonomous Protocol (/mcp)

IBM Bob connects as an autonomous MCP client to our FastMCP server, exposing **11 military operational tools** and real-time resources:

get_fleet_readiness_summary	predict_component_failures
explain_readiness_issue	generate_maintenance_plan
simulate_mission_stress	get_mission_reallocation_matrix
generate_mil_std_work_order	get_sensor_anomalies

Live Resources & Prompts

- **MCP Resources:** fleet://status • fleet://predictions/critical
- **MCP Prompts:** Morning readiness briefing • Investigate asset failure

IBM watsonx.ai Granite 3-8B Synthesis

Translates thermodynamic telemetry deviations into concise natural language briefings for flight commanders and technicians.

- **Model:** ibm/granite-3-8b-instruct via official Python SDK.
- **Role:** Root-cause mechanical failure analysis and maintenance guidance.
- **Dual-Mode Engine:** Live IBM Cloud connection + deterministic military diagnostic fallback ensuring zero crashes during judge evaluation.

Why IBM Bob is Load-Bearing

Bob is not a generic chatbot. Bob acts as an operational copilot with direct read/write access to fleet models, ML predictions, work orders, and mission windows via JSON-RPC 2.0.

Hero Demo: F-16 Viper 101 Failure Prevention

A live tactical demonstration from raw sensor anomaly to prioritized turnaround.

1. Platform at Risk: F16-VIPER-101


Aircraft: F-16C Block 50 (421st Fighter Sq, 1178.2 hrs)
Status: Non-Mission Capable (Readiness: 42%)
Precursor Anomaly: Turbine gas temperature thermal creep (T30: 1598.4°R, EGT limit exceeded).

2. Prognostic Forecast & Mission Impact

Predicted RUL: 18.4 flight hours (95% CI: 14.1 – 22.7 hrs)
Mission Threat: Assigned to *Operation Desert Shield* (starts in 48 hrs). Platform would experience catastrophic turbine distress mid-sortie.

3. Bob Copilot & watsonx Resolution

Bob executes explain_readiness_issue via Granite 3-8B, explains LPT thermal creep, and auto-generates Work Order WO-2026-001 (Priority 1 Turnaround, 6.5 hrs).

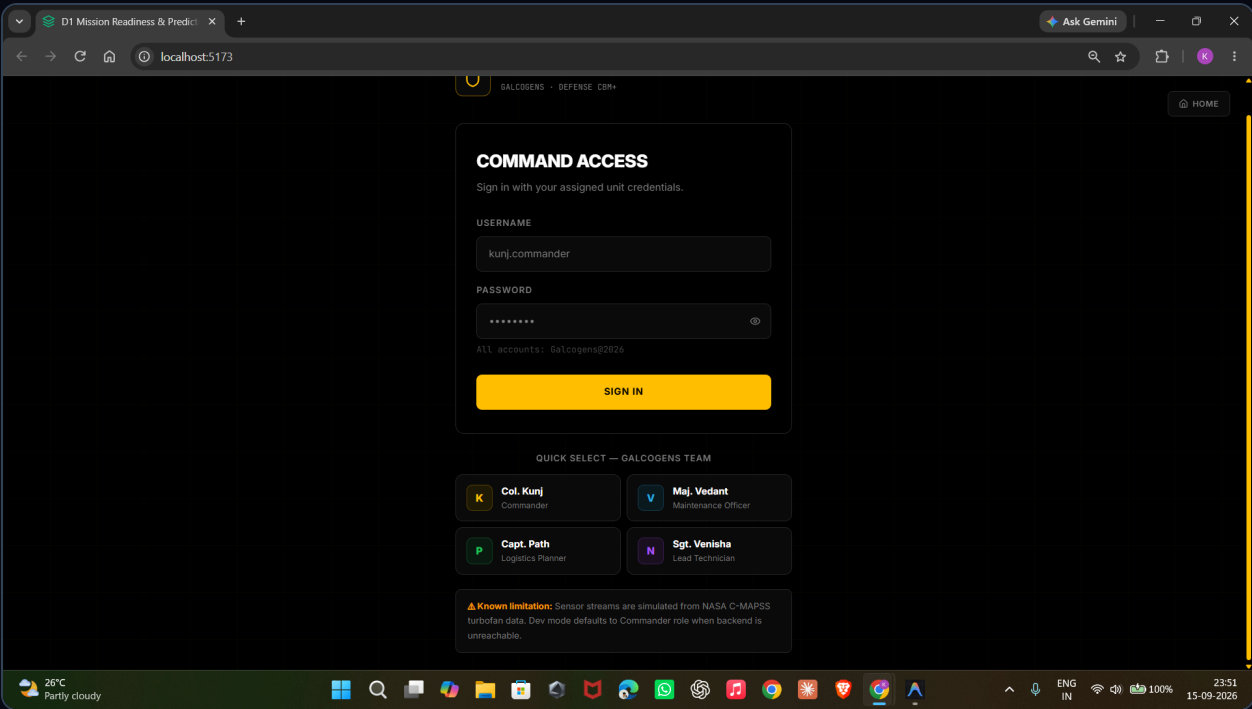

ACTUAL APPLICATION SCREENSHOT: Bob Copilot Autonomous FastMCP Output

Mission Decision Support: Beyond Binary Grounding

Innovative capabilities engineered specifically for defense combat generation.

1. What-If Mission Stress Digital Twin

Simulates counterfactual environmental & combat profiles before platform commitment to evaluate accelerated wear factors:

- **Desert Heat (+45°C):** Thermal creep accelerator factor 1.42×
- **Sand & Dust Ingestion:** Compressor particulate abrasion 1.85×
- **Combat High-G Maneuvering (7-9G):** Structural fatigue surge 2.10×
- **Survivability Probability:** Forecasts exact mission completion odds before pilot takeoff.

2. Mission-Adaptive Sortie Re-allocation

Dynamic Air Tasking Order (ATO) matching engine. Rather than grounding degraded aircraft (PMC), D1 re-allocates them to compatible low-stress sorties:

- × Combat Air Patrol (9G): INELIGIBLE (Exceeds Thermal Margins)
- × Close Air Support (Low-Level): INELIGIBLE (Dust Abrasion Risk)
- ✓ High-Altitude ISR Recon (3G): VIABLE (94% Mission Odds)
- ✓ Tactical Ferry / Transit (2G): VIABLE (99% Mission Odds)

Impact: Saves critical combat sorties and preserves operational tempo without compromising flight safety.

Action & Human Control: Defense Compliance

Supporting human command decisions — never executing irreversible maintenance silently.

Digital AFTO Form 781A & DA Form 2404

D1 auto-dispatches official defense discrepancy documents compliant with Air Force Technical Order 00-20-1 standards:

- **Military Discrepancy Symbols:** Official Red X (Grounded) / Red Diagonal (Warning).
- **Job Control Numbers (JCN):** Automated Julian date work tracking (e.g. 26258-001).
- **Action J-Codes:** Corrective maintenance standard military codes.
- **DLA NSN Parts Manifests:** Federal National Stock Numbers (e.g. NSN-2840-01-450-1289) for rapid supply requisition.

Strict Human Command Hierarchy

- STEP 1: AI Recommends Priority Work Order
- STEP 2: Maintenance Officer Reviews Telemetry & RUL
- STEP 3: Command Officer Approves Work Order Dispatch
- STEP 4: Fleet Readiness Automatically Recalculates

Security: Implemented Controls vs. Production Roadmap

Clear demarcation of verified codebase security controls and future defense hardening.

Implemented & Verified in Codebase

- **Cryptographic Password Hashing:**

Direct bcrypt with 12 salt rounds & 72-byte truncation in `src/backend/app/core/security.py`.

- **Signed JWT Token Authentication:**

Stateless cryptographic tokens via `python-jose` with expiration and subject claims.

- **5-Role Role-Based Access Control (RBAC):**

Enforced at FastAPI route level: `commander`, `maintenance_officer`, `logistics_planner`, `technician`, `admin`.

- **Persistent Audit Logging:**

Dedicated `AuditLog` database model recording timestamps, user IDs, actions, and IP addresses.

Production Hardening Roadmap

- **Avionics Bus Cryptography:**

Hardware encryption for physical MIL-STD-1553 and ARINC 429 aircraft data buses.

- **Field-Level Database Encryption:**

AES-256 transparent data encryption for classified platform telemetry at rest.

- **API Gateway Rate Limiting:**

Redis-backed token bucket rate limiting for external MCP endpoint traffic.

- **Air-Gapped LLM Deployments:**

On-premise IBM Granite deployment for classified SCIF defense installations.

Impact & Scalability: The Road Beyond Hackathon

Transforming prototype validation into enterprise-scale defense fleet maintenance.

1. Operational Availability

≥85%

Sustaining an FMC rate ≥85% across combat squadrons by catching high-severity degradation before platform deployment.

2. Zero Sortie Aborts

0

Eliminating preventable mid-mission turbine and transmission failures through proactive 48-to-72 hour horizon forecasting.

3. Turnaround Optimization

-40%

Reducing hangar turnaround delays by auto-dispatching AFTO 781A work orders and pre-ordering DLA NSN parts.

Production Scaling Vectors

Avionics Integration: Direct connection to physical MIL-STD-1553 and HUMS ground replay stations.

Enterprise Systems: Two-way synchronization with military ERPs (GCSS-Army, AFTO G081, IMDS).

Tactical Edge: Running quantized ONNX RUL models on ruggedized field hardware with zero cloud dependency.

MISSION STATEMENT

**“D1 turns equipment health predictions
into mission-readiness decisions.”**

By combining physics-grounded ML prognostics, autonomous IBM Bob FastMCP orchestration, and watsonx.ai diagnostics, D1 ensures that when the mission begins, every airframe and combat platform is ready to fly.

TEAM GALCOGENS

Kunj, Vedant, Path, Venisha

GITHUB REPOSITORY

github.com/kunj290506/bob-ai-hackathon-galcogens