



I2C Jumper (0 ohm)




JTAG to External (Optional)




+1.2 V (5 A) Generation


*** IMPORTANT NOTE:**
Please ensure that FB9 is removed from the XEM7310 board prior to supplying 1.2 V to VCCO, MC2.
DO NOT TOUCH FB8

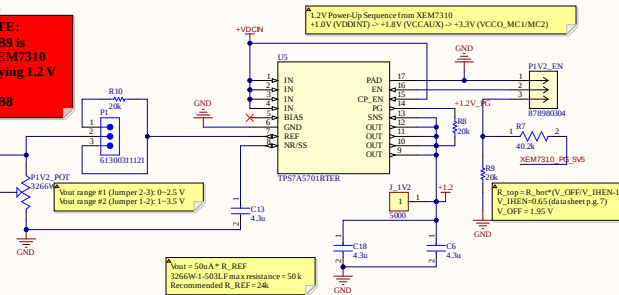


+5.0 V Input + Decap

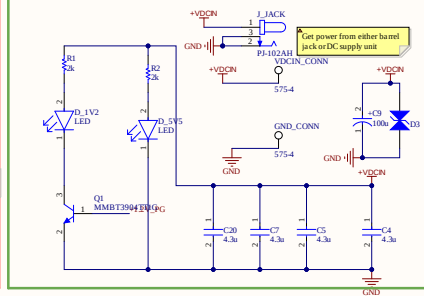


Level Shifter




MCP2221 USB to I2C

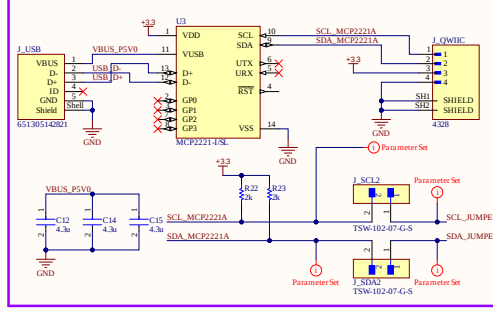


+3.3 V (1 A) Generation




To Main Board

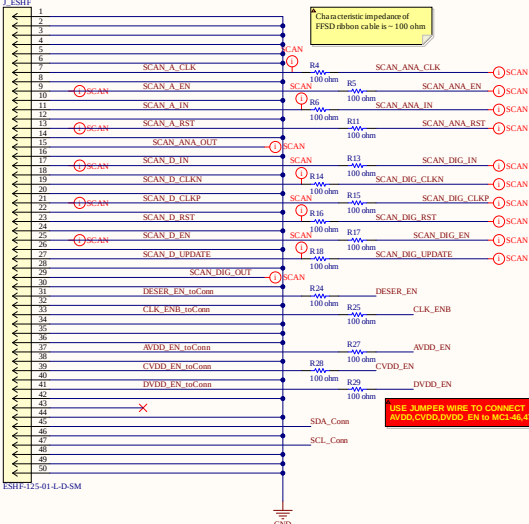



Mezzanine Connectors

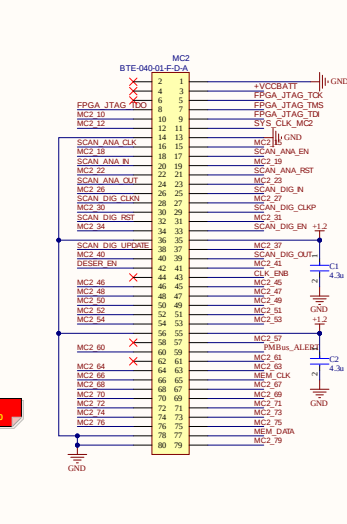

Mezzanine Connectors

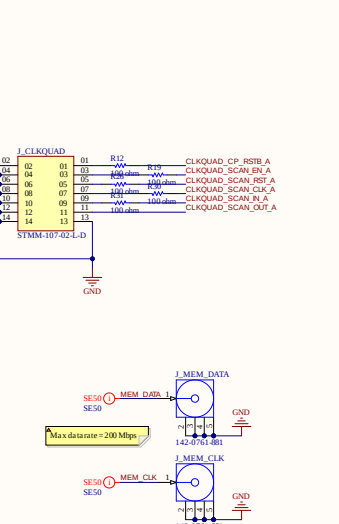

* If FB8 is not removed on the XEM7310 board, then signal outputs from the CLKQUAD, SCAN, and DESER pins will have an amplitude of 3.3V.
* If FB8 is removed, then please supply power to the VCCO, MC1 pin using the J_VCCO, MC1 jumper.

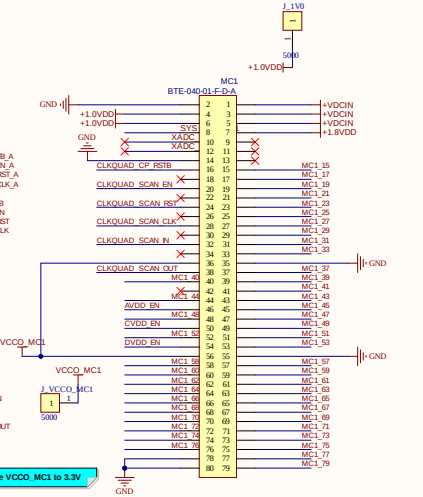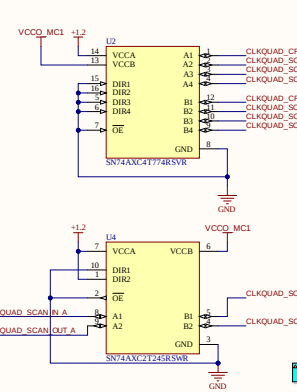

XEM7310 Breakout Board			
Size	Number	Revision	
A2	1	1.0	
Drawn	C:\Users\Kunino Kim	Sheet of 1	
File	C:\Users\Kunino Kim	Drawn By: Kunino Kim	



XEM7310 FPGA Breakout Board

Berkeley
Wireless Research Center

Board No.

J_JTAG

J_GND2

J_ESHF

A_EN
A_RST
A_CLK
A_IN
A_OUT
D_IN
D_CKN
D_CKP
D_RST
D_EN
D_UP
D_OUT
D_DOWN
CLK8G
DESER
CU_EN
DU_EN
AV_EN

MC2

J_MEM_DATA

J_MEM_CLK

P1V2_P0T

J_GND4

GND_CONN

J_1V2

R8

J_1V0

R7

EN

DIS

R9

J_VCC0_MC1

UDCIN_CONN

U1

R23

R22

U3

J_QWIIC

J_GND1

J_USB

3003 0909

3003 0909