



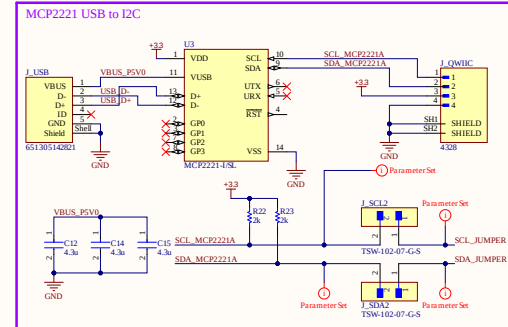
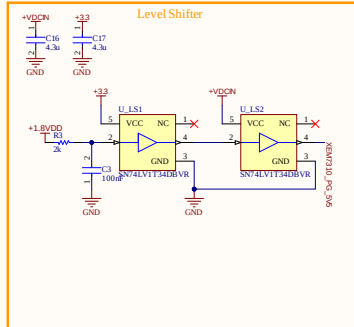
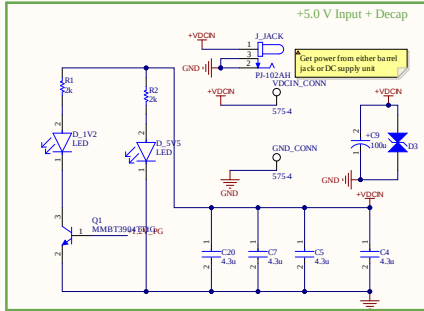




I2C Jumper (0 ohm)

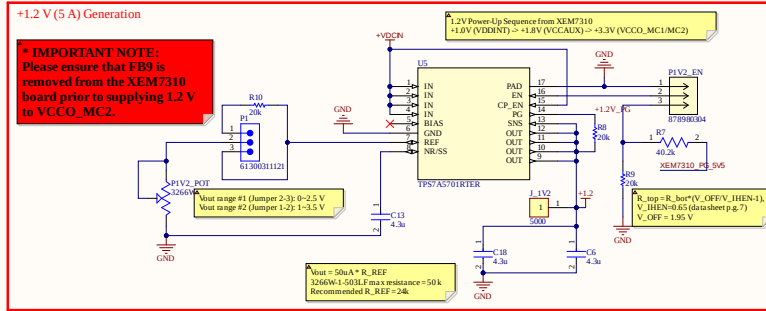

JTAG to External (Optional)




To Main Board

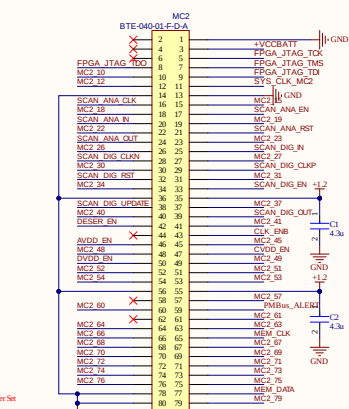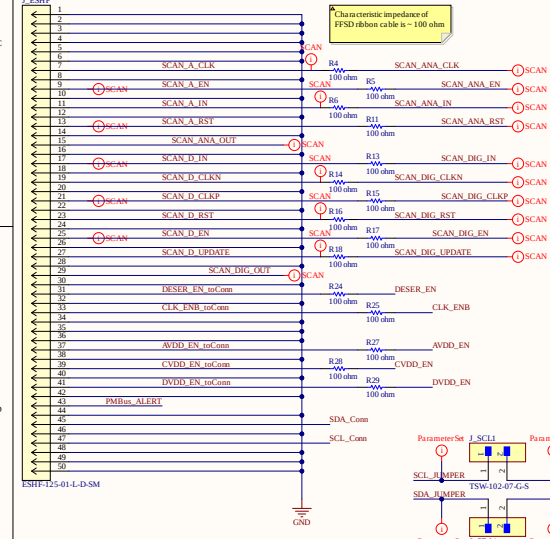

Mezzanine Connectors

FB9 must be removed on the XEM7310 board, then signal outputs from the CLKQUAD_* pins will have an amplitude of 3.3V.

If FB9 is removed, then please supply power to the VCCO_MC1 pin using the J_VCCO_MC1 jumper.

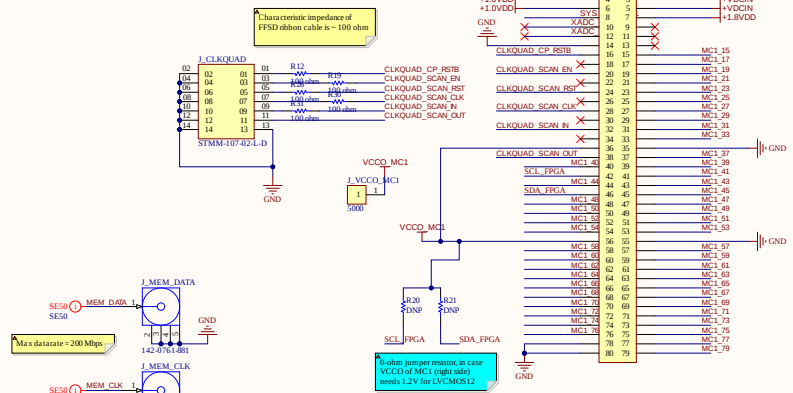

XEM7310 Breakout Board		
Size	Number	Revision
A2	70420025	
Drawn	C:\Users\jlabat\OneDrive\Documents\Drawings\Kunio Kim	
File	C:\Users\jlabat\OneDrive\Documents\Drawings\Kunio Kim	



XEM7310 FPGA Breakout Board

Berkeley
Wireless Research Center

Board No.

J_JTAG

J_GND2

J_ESHF

P1V2_P0T

J_GND4

GND_CONN

C13

U5

C5

C4

J_1V2

R8

J_1V0

R7

EN

DIS

R9

D_1V2

R1

R2

D_5V0

UCCIN_CONN

J_VCC0_MC1

C2

C18

C6

C1

R20

R21

MC2

MC1

J_SCL1

J_SDA1

R_SCL

J_SCL2

R_SDA

J_SDA2

J_MEM_DATA

J_MEM_CLK

R23

R22

U3

U1

C10

C11

J_QWIIC

J_GND1

J_USB

3003 0909

3003 0909