

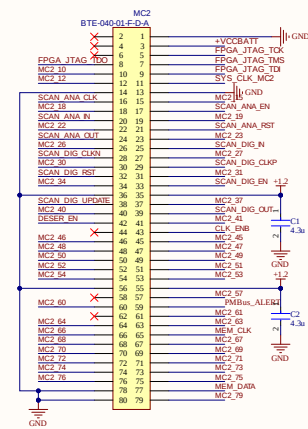
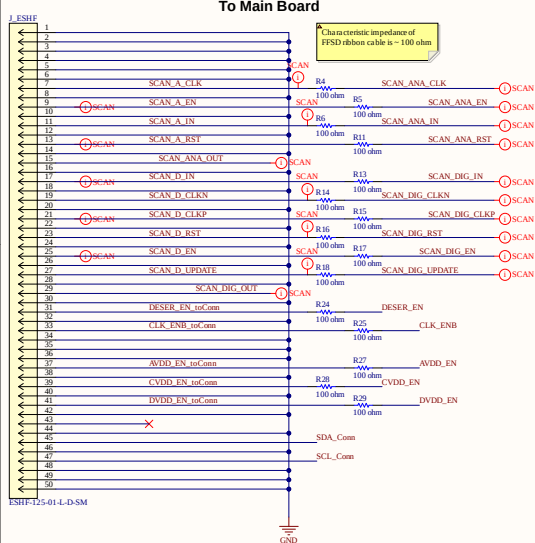

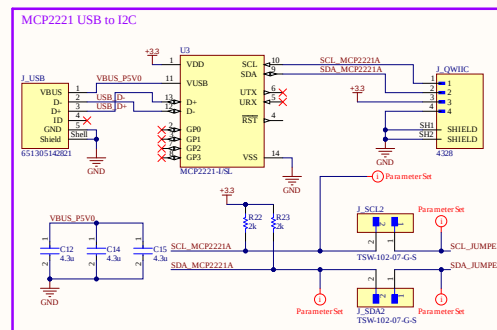
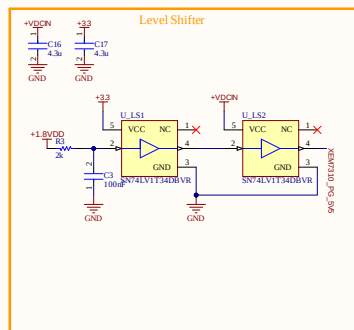
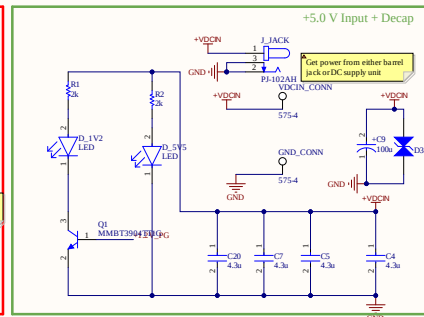
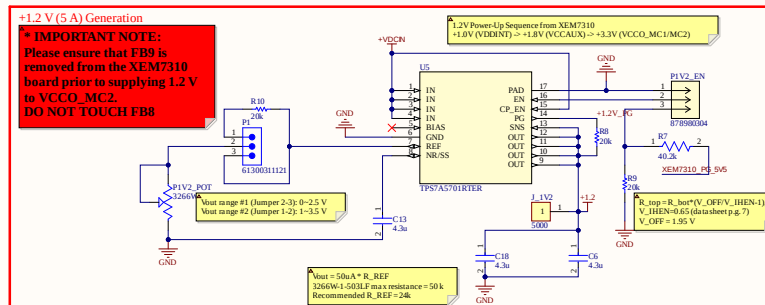



- If FB8 is not removed on the XEM7310 board, then signal outputs from the CLKQUAD_* pins will have an amplitude of 3.3V.
- If FB8 is removed, then please supply power to the VCCO_MC1 pin using the J_VCCO_MC1 jumper.

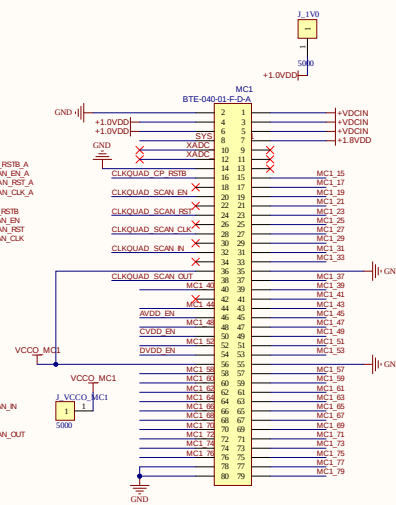

Title XEM7310 Breakout Board		
Size A2	Number	Revision
Date: 5/26/2026	Sheet of	
File: C:\Users\Akash\OneDrive\Desktop\XEM7310	Drawn By: Kumma Kum	

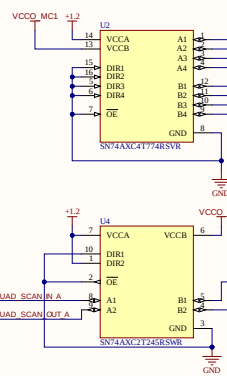

XEM7310 FPGA Breakout Board

Berkeley
Wireless Research Center

Board No.

J_JTAG

J_GND2

J_ESHF

A_EN
A_RST
A_CLK
A_IN
A_OUT
D_IN
D_CKN
D_CKP
D_RST
D_EN
D_UP
D_OUT
D_DOWN
CLK8G
DESER
CU_EN
DU_EN
AV_EN

MC2

J_MEM_DATA

J_MEM_CLK

P1V2_P0T

J_GND4

GND_CONN

J_1V2

R8

J_1V0

R7

EN

DIS

R9

J_VCC0_MC1

UDCIN_CONN

U1

R23

R22

U3

J_QWIIC

J_GND1

J_USB

3003 0909

3003 0909