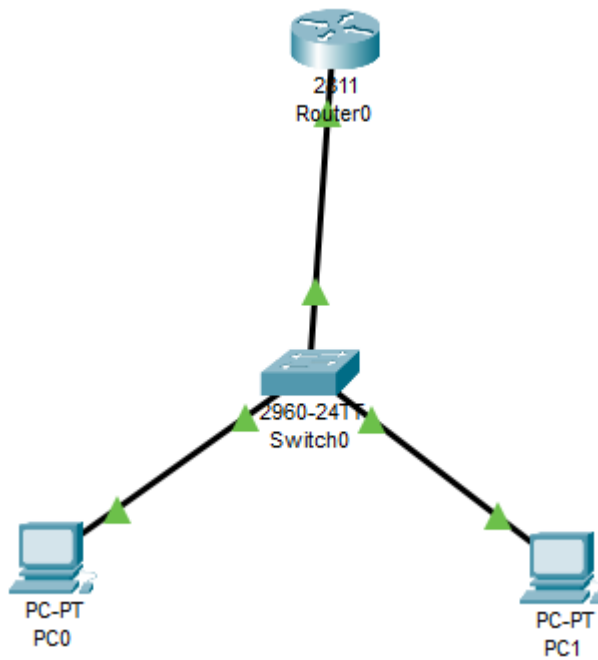Практическая работа 10


```
Router#enable
Router#conf terminal
Enter configuration commands, one per line.  End with CNTL/Z
Router(config)#F
% Incomplete command.
Router(config)#inter FastEthernet0/0
Router(config-if)#no shutd
Router(config-if)#
Router(config-if)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
```

```
Router(vlan)#exit
APPLY completed.
Exiting....
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface FastEthernet0/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/1
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/1
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#ip address 192.168.0.1 255.255.255.0
Router(config-if)#ip address 192.168.0.1 255.255.255.0
Router(config-if)#ip address 192.168.0.1 255.255.255.0
Router(config-if)#%IP-4-DUPADDR: Duplicate address 192.168.0.1 on FastEthernet0/0,
sourced by 00D0.970C.27E3

Router(config-if)#
Router(config-if)#ip dhcp pool vashname
Router(dhcp-config)#network 192.168.0.0 255.255.255.0
Router(dhcp-config)#default-router 192.168.0.1
Router(dhcp-config)#dns-server 7.7.7.7
Router(dhcp-config)#exit
Router(config)#
```
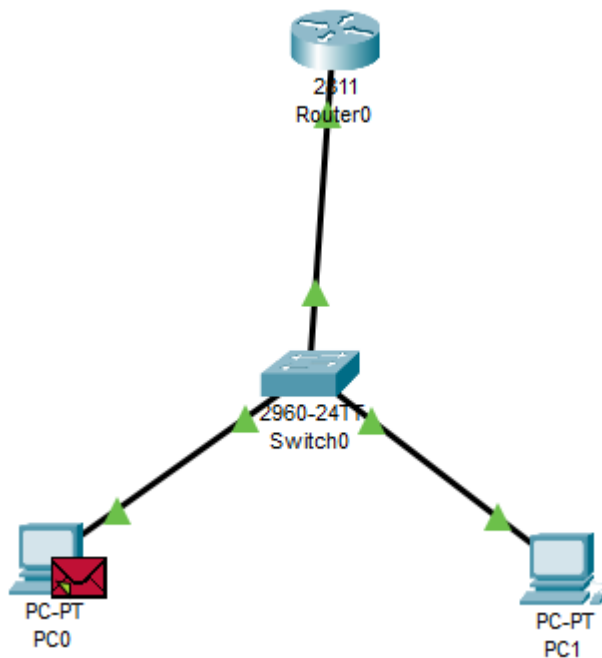


```
C:\>ping 192.168.0.2

Pinging 192.168.0.2 with 32 bytes of data:

Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time=3ms TTL=128
Reply from 192.168.0.2: bytes=32 time=4ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss)
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 4ms, Average = 1ms
```