


Практика 25

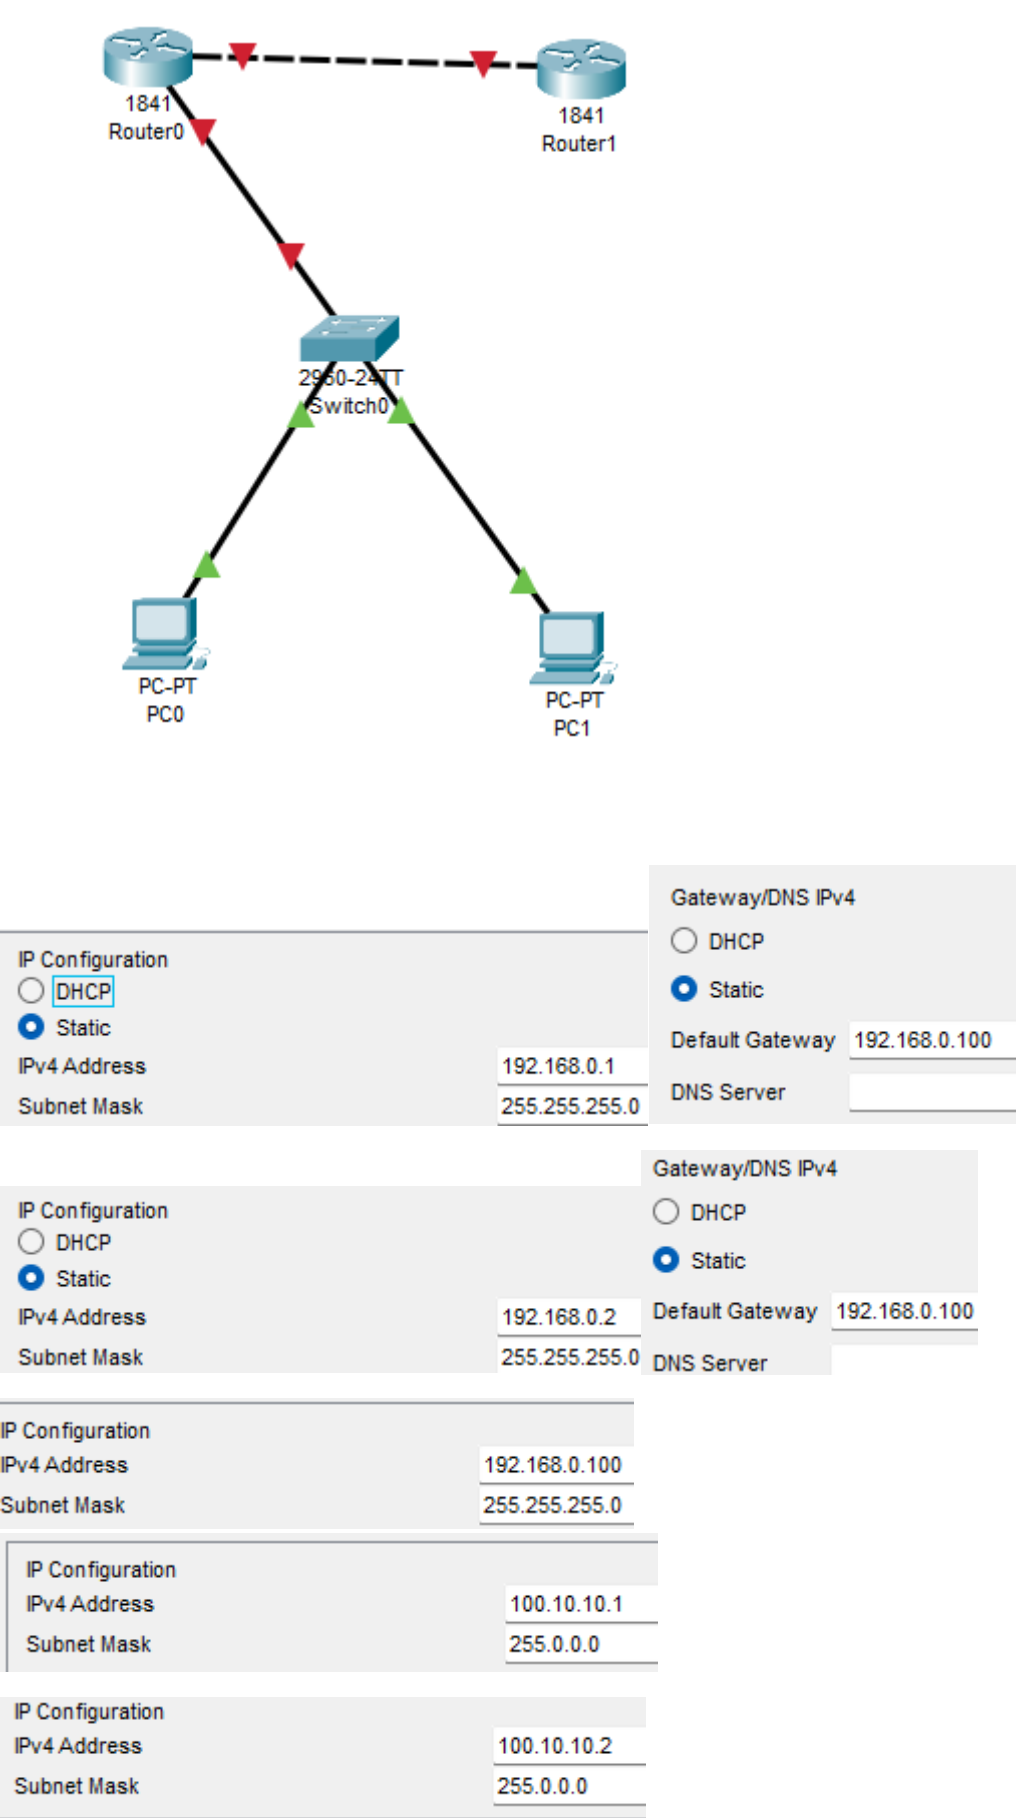

```

Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#ip address 192.168.0.100 255.255.255.0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/1
Router(config-if)#ip address 100.10.10.1 255.0.0.0
Router(config-if)#
Router(config-if)#exit
Router(config)#access-list 1 permit 192.168.0.0 0.0.0.255
Router(config)#ip nat inside source list 1 int fa0/1 overload
Router(config)#int fa0/0
Router(config-if)#int nat inside
      ^
% Invalid input detected at '^' marker.

Router(config-if)#ip nat inside
Router(config-if)#int fa0/1
Router(config-if)#ip nat outside

```

```

C:\>ping 100.10.10.2

Pinging 100.10.10.2 with 32 bytes of data:

Request timed out.
Reply from 100.10.10.2: bytes=32 time<1ms TTL=254
Reply from 100.10.10.2: bytes=32 time=11ms TTL=254
Reply from 100.10.10.2: bytes=32 time<1ms TTL=254

Ping statistics for 100.10.10.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 11ms, Average = 3ms

C:\>

```

```

C:\>ping 100.10.10.2

Pinging 100.10.10.2 with 32 bytes of data:

Reply from 100.10.10.2: bytes=32 time<1ms TTL=
Reply from 100.10.10.2: bytes=32 time<1ms TTL=
Reply from 100.10.10.2: bytes=32 time=10ms TTL=
Reply from 100.10.10.2: bytes=32 time<1ms TTL=

Ping statistics for 100.10.10.2:
    Packets: Sent = 4, Received = 4, Lost = 0
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 10ms, Average = 2

C:\>|

```