
Практическая работа 5

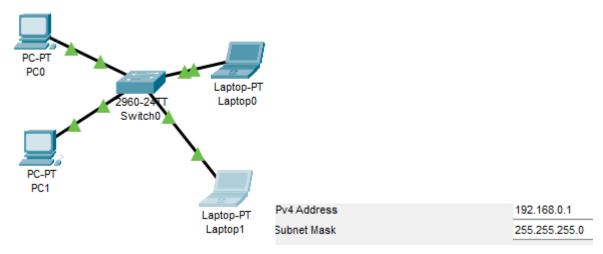

Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config) #vlan 2
Switch(config-vlan) #name programmer
Switch(config-vlan) #exit
Switch(config) #vlan 3
Switch(config-vlan) #name buhg
Switch(config-vlan) #exit
Switch(config-vlan) #exit
Switch(config) #

Switch(config)#show vlan % Invalid input detected at '^' marker. Switch(config) #int fa0/1 Switch(config-if) #switchport mode access Switch(config-if) #switchport mode vlan2 % Invalid input detected at '^' marker. Switch(config-if) #switchport mode vlan 2 % Invalid input detected at '^' marker. Switch(config-if)#exit Switch(config) #int fa0/2 Switch(config-if) #switchport mode access Switch(config-if) #switchport mode vlan 2 % Invalid input detected at '^' marker. Switch(config-if) #exit Switch(config)# Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit De Successful PC0 Laptop1 ICMP 0.000 N (edit) (d