

	Product Data Sheet	CNP PUMPS INDIA PVT. LTD.
	CDL 4- 10 3PH,50HZ,CI,2.2KW	
	Centrifugal Water Pump	

Product Picture :

Note : The picture may not be the same as the actual product.



This vertical Multistage Centrifugal Pumps (CDL) are close coupled pumps with suction and discharge outlets are in same line. The pump head and inlet-outlet are in cast iron and all other wetted parts are in Stainless Steel. Cartridge Type seal are reliable and ease for maintenance. The pump is driven by standard Totally Enclose Fan Cooled (TEFC) motors and close coupled with split coupling.

Rated Parameter

Operating Flow range (m ³ /h)	2 - 6
Operating Head range (m)	90 - 62
Eff (%)	53
Power (kw)	1.67
NPSHr(m)	2
Impeller Dia (mm)	95
Speed (rpm)	2900
Impeller Stage	10

Installation

Connection Code	F
Maximan Pressure/ Temperature (high)	25 bar / 120
Maximan Pressure/ Temperature (low)	25 bar / - 15
Flange Standard	DIN
Pressure Class	PN25
Inlet & Outlet	DN32

Material

Impeller	AISI 304
Inlet Outlet Chamber	HT200
Mechanical Seal	TC/CA/NBR

Technical

Pump rated speed	2900
Nameplate standards	CE
Pump version	2

Motor

Motor Phase / Pole	Three Phase / 2 Pole
Protection Class	IP55
Insulation Class	F
Motor Power	2.2 kW
Power Frequecy	50Hz
Rated Voltage (V)	415 V
Rated Current (A)	8.2 / 4.7 A
Energy Efficiency Lavel	IE2

Medium

Liquid	Water
Medium Temperature normal temperature	- 15 / +70
Medium Temperature high temperature	- 15 / +120
Maximum Environment Temperature	40

Other

Net Weight	40
Gross Weight	42
Volume	0

Disclaimer : Technical information is subject to change without notice



Product Data Sheet


CDL 4- 10 3PH,50HZ,CI,2.2KW

CNP PUMPS INDIA PVT. LTD.

Centrifugal Water Pump

Performance Curve

Design point Parameters	
Flow (m ³ /h)	4
Head (m)	81

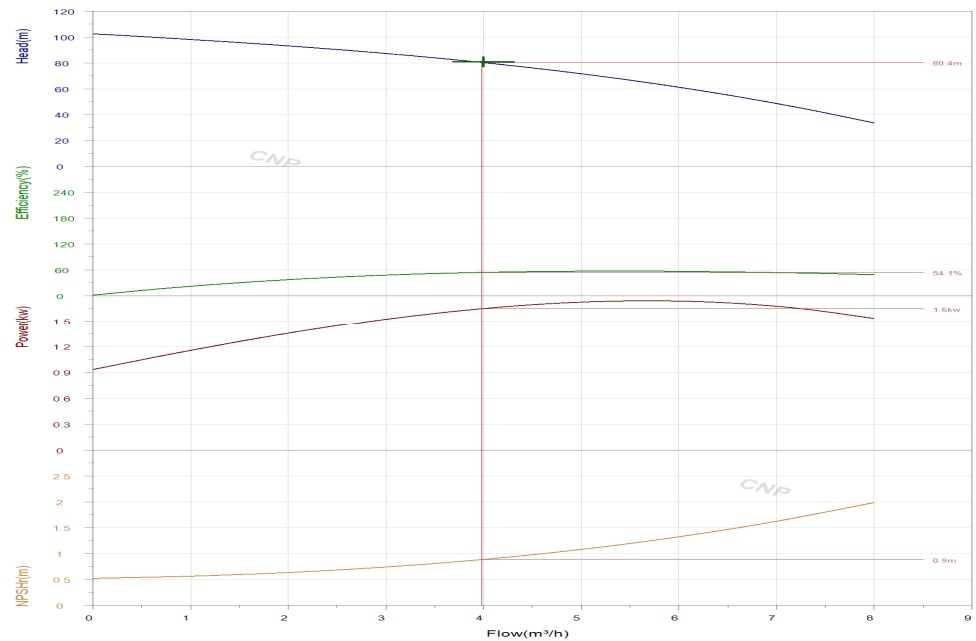

Graph

