



ezylift™

BE SAFE ALL TIMES

"Creating things to make people's life easy"



BE SAFE ALL TIMES

PRATIK N. PAREKH
DIRECTOR
+91 88982 22856

"Creating things to make people's life easy"



BE SAFE ALL TIMES

NAZIM SHAIKH
BRANCH HEAD
+91 84013 15544
sales.bhaurch@ezylift.in

PROOF HOISTS

"Creating things to
make people's life easy"

It require a special knowhow for transporting, shifting or lifting the material in:

- Chemical Plants
- Cool Mines
- Fertilizer companies
- Heavy Water Projects
- Mineral Oil Industries
- Petrochemical Plants
- Pharmaceutical Industries
- Plastic Industries

Wherever Inflammable, Explosive and Corrosive vapours, liquids and gases are expected to be present the most important demand to be met by elevator in such hazardous area is high degree of reliability and perfection. Since faults may entail serious danger to personnel & plants.

Causes of Explosion

There are many causes of explosion. Anyone or more then one of them may cause explosion, such as:



Electrostatic charge
Electrical spark



Spark of
mechanical origin



Slow discharge



Flame

The easiest way to avoid explosion is to avoid the ceration of and explosive atmosphere by providing adequate vetilation or confining work process to closed systems which prevent the occurence of dangerous gases.

For selection of explosion proof material handling equipment, following points should be taken care of:

1. Hazardous Areas :

Hazardous areas are catagoristed into zones depending on the frequency and duration as per Is-5572(Part-1) i.e Zone 'I', Zone 1 and Zone 2.

Classification of Area as per IS 5572 (Part 1) 1994	
Zone 0	Hazardous atmosphere is continuously present.
Zone 1	Hazardous atmosphere is likely to be present at any time under normal operating conditions.
Zone 2	Hazardous atmosphere is likely to be present only under abnormal conditions and for a short period.



2. Ignition Temperature :

Flammable gases and vapours are categorised in temperature classes from T1 to T6. Ignition temperature is the lowest temperature at which the flammable gas will ignite.


The ignition temperature classes are shown in the table here below.

3. Hazardous Gas:


Hazardous gases have been classified in IS:2148-1981 and are associated only with flameproof enclosures. These gases along with the ignition temperature classes are listed in following table.

Gas Group	Temperatures class with Ignition temperature in C					
	T1 above 450	T2 300-450	T3 200-300	T4 135-200	T5 100-135	T6 85-100
I	Methane					
II A	Carbon Monoxide, Ind. Methane, Ammonia, Propane, Benzene, Acetone, Ethylacetate, Methanol	Butane, Cyclohexane, Amy - Laccetate, Ethonal, N-Butanol	Benzene	Diethyl Ether		
II B	Coke Oven Gas	Ethylene, Ethylene Oxide, 1-3 Butadiene	Diethyl Ether			
II C	Hydrogen					


EzyLift flame proof hoists are designed in modular construction which greatly simplifies repairs and cuts down time. EzyLift flame proof hoists are designed in accordance with IS-3938. all electrical apparatus are housed in flame proof enclosures conforming to SI-2148 and mechanical components are designed so that there is no ferrous metal to ferrous metal contact in order to void any chance of sparking. hence EzyLift flame hoists are flame proof as well as spark proof.

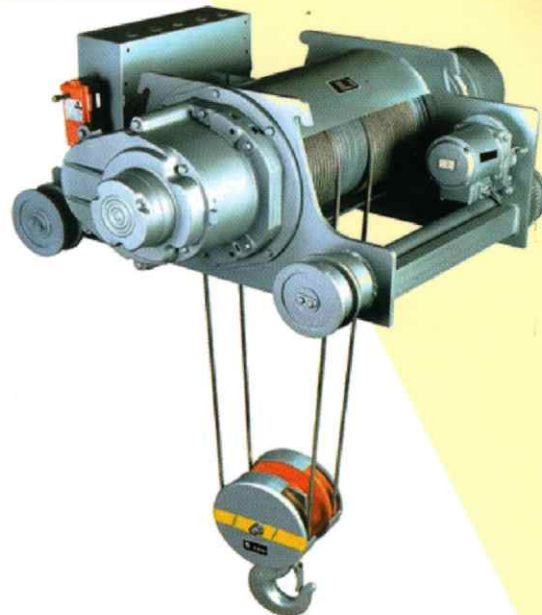

FLP Junction Box

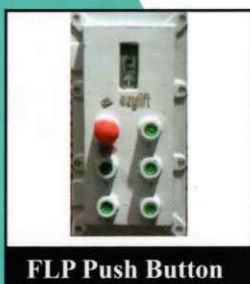

FLP Push Button

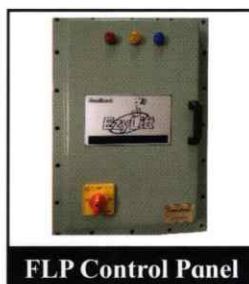


FLP Control Panel



FLP Gravity L.S.



FLP Limit Switch

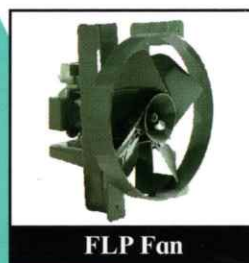

FLP Fan





FLP Light



FLP Camera Enclosure

FLAME PROOF HOISTS

Flame proof hoists are attended for gas group I, IIA & IIB suitable for Zone-1 and Zone-2 areas whereas for gas group IIC flames proof hoists are offered only for Zone-2 areas.

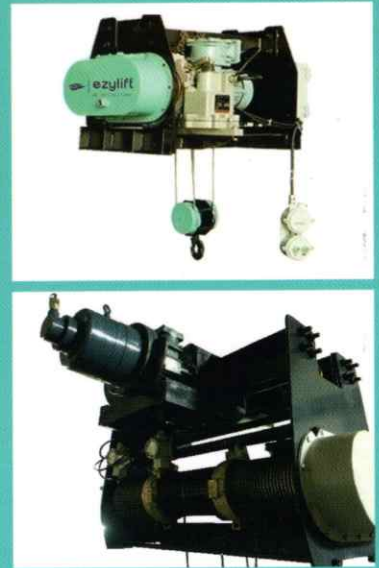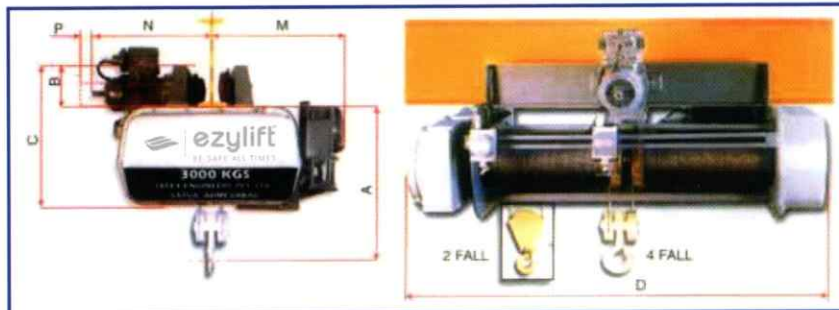

S.W.L. Kgs.	Lift Mts.	Speeds mpm Hoisting	C.I.	Motor H.P. Hoisting	C.I.	No. of Falls	Dimensions mm A	B	C	D	M	N	P	Wt. Kgs.
1000	6	4	15	1.5	0.5	2	650	250	730	1070	570	490	320	400
2000	6	4	15	3.0	0.5	2 OR 4	750	250	730	1070	570	490	320	400
3000	6	3.5	15	5.0	0.5	2	800	200	650	1200	650	600	320	500
5000	6	3.5	15	7.5	1.0	4	900	200	650	1200	650	600	320	550
10000	6	3	10	12.5	1.5	4	1500	250	950	1700	620	690	320	1200
15000	6	2	10	15	2.0	4/6/8	1650	300	1100	1850	750	900 / 700	320	1600 / 2000
20000	6	2	10	18	2.0	4/6/8	1850	325	1150	2000	750	900 / 700	320	2000 / 2000

* Special requirements like higher speeds, higher lifts, low headroom, compact dimension will be offered against inquiry.

EzyLift flame proof hoists are manufactured in wide range like lifting capacities between 250 kgs. to 25,000 kgs., lifting height up to 50 mts., with various types of cross travel trolleys like power travel type, hand geared travel, push pull trolley, flexible trolley to negotiate even a small radius etc. We also specialize in supply of custom built flame proof wire rope hoists for special applications like very low head rooms, very high lifts, dual motor speeds or any other specific application.

OTHER PRODUCTS



EOT Crane



Jib Crane



Hydraulic Lift



Scissor Lift



Stacker



Dock Leveler



CP Block



Hoist



ezyliftTM

BE SAFE ALL TIMES

GoEzyLift Tech Pvt. Ltd.



Office : B 402, Sai Deep Plaza, Yashwant Viva Township, Vasai (East) - 401 303.

Factory : Unit No. 2, Janki Industrial Estate, K.T. Park 1, Gourai Pada, Vasai (East) - 401 208.

Phone : +91 96534 07901

Email : sales@ezylift.in

Web : www.ezylift.in

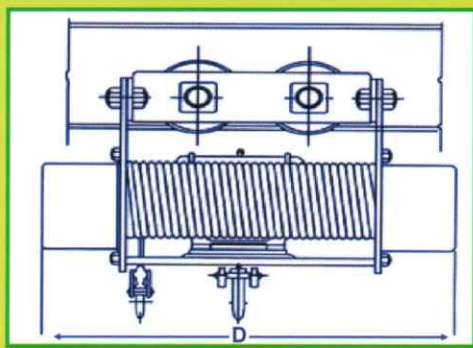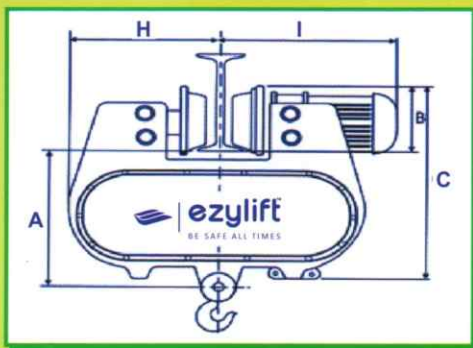

S.W.L. Kgs.	Lift Mts.	Speeds mpm Hoisting	C.I.	Motor H.P. Hoisting	C.I.	No. of Falls	Dimensions mm A	B	C	D	H	I	Wt. Kgs.
250	6	4	-	0.5	-	2	570	100	410	770	130	150	95
500	6	4	18	0.5	0.25	2	425	180	460	700	300	400	150
1000	6	4	18	1.25	0.25	2	450	180	460	700	300	400	180
2000	6	4.0	15	3.0	0.5	2 to 4	600 / 650	200	690	1050	500	500 / 540	400
3000	6	3.5	15	5.0	0.5	2	750	200	690	1100	500	545	500
5000	6	3.5	15	7.5	1.25	4	900	200	690	1100	500	545	550
10000	6	3	10.0	12.5	1.5	4	1500	250	950	1700	620	690	120
15000	6	2	10.0	15	2.0	4 or 6	1650	300	1100	1850	750	900 / 700	1600 / 2000
20000	6	2	10.0	18	2.0	4 or 6	1850	325	1150	2000	750	900 / 700	2000 / 2500

* Special requirements like higher speeds, higher lifts, low headroom, compact dimension will be offered against inquiry

CRANES

EzyLifts Electric Overhead Traveling Cranes are designed & manufactured in accordance with IS : 3177 considering adequate factor of safety with respect to appropriate duty classifications. The structural parts of the cranes are designed in accordance with IS : 807. Product range includes single girder cranes, jib cranes, double girder cranes, mono box cranes, Goliath cranes, EOT cranes & HOT cranes to suit customers specific requirements to handle material most efficiently.

CAPACITY : 1000 kgs. to 60,000 kgs.

CAGE HOISTS

EzyLifts Goods lifts are specially designed for safe lifting of the material. A steel cage (with or without collapsible shutters) is being guided in steel guide members with hoisting & lowering operations being performed through EzyLifts hoist. The cage is operated through properly interlocked push buttons with limit switches for perfect safety.

CAPACITY : 500 kgs. to 7500 kgs.

ELECTRIC CHAIN HOISTS

EzyLifts electric chain hoists are designed in modular construction for easy maintenance. The Special features like low head - room, spur gears running on antifriction ball bearings with oil bath lubrication, motors confirming to IS : 325 etc. makes EzyLifts chain hoists unbeatable to its price. EzyLifts chain hoists are available in hook suspension type; push - pull trolley type; hand geared trolley type; power travel trolley type & flexible trolley type to negotiate small radius.

CAPACITY: 500 kgs, 1000 kgs & 2000 kgs.

CHAIN PULLY BLOCKS

EzyLifts chains pulley blocks are designed & manufactured in accordance with IS 3832 & are available in Hook suspension type; push-pull trolley type hand geared trolley type. Load chain used is graded alloy steel chain & hand chain is m.s. calibrated to relevant I.S. standards.

Capacity: 500 Kgs. to 25,000 Kgs

HOISTS

EzyLifts wire rope hoists are designed in modular constructions which greatly simplifies repairs & cuts downtime. The special features are low headroom, spur/helical gears running on antifriction ball bearings with lubrication, motors confirming to IS 325, "fall to safe" brakes which automatically operate in case of any power failure, tested wire rope confirming to IS 2266, forged hooks conforming to IS 3815 and push button stations operating at step down voltage of 110 V, 42 V or 24 V.

EzyLifts Hoists are designed in accordance with IS 3938.

EzyLifts hoists are compact, rugged & elegant in appearance to accommodate specific requirements, EzyLifts hoists can also be built with micro speed arrangements (10% of normal hoisting speed), flexible trolleys to negotiate small radius, high speeds & high lifts, hoists suitable for steel mill duty, foundries & chemicals plants.

Capacity: 500Kgs. to 20,000 Kgs.

FLAME PROOF HOISTS

EzyLifts Hoists with Flame Proof Electricals confirm to IS : 2148. All Flameproof Electricals used in the hoists are duly certified by Central Mining Research Station, Dhanbad and are suitable for gas groups I, IIA & IIB.

Flame hold upto 15000 kgs and lift upto 40 mtr. Any critical dimensional requirement can be matched.

OTHER PRODUCTS



EOT Crane



Jib Crane



Hydraulic Lift



Scissor Lift



Stacker



Dock Leveler



CP Block



Hoist



ezyliftTM

BE SAFE ALL TIMES

GoEzyLift Tech Pvt. Ltd.

Office : B 402, Sai Deep Plaza, Yashwant Viva Township, Vasai (East) - 401 303.

Factory : Unit No. 2, Janki Industrial Estate, K.T. Park 1, Gourai Pada, Vasai (East) - 401 208.

Phone : +91 96534 07901

Email : sales@ezylift.in

Web : www.ezylift.in




"Creating things to make people's life easy"




- An Excellent Product from the Manufactures of EzyLift brand equipment in India.
- 1T, 2T, 3T All chain pulley blocks are in single fall.
- With ISI mark upto 10 Tons and as per IS 3832 specifications.
- 1 year warranty against any manufacturing defects on Ex-works basis.
- Overload tested to 150% of safe working load (working load limit) certificate with every block.
- Light Weight & Compact Body.
- Powder Coated, strong & safe IS : 15560 Hooks with stainless steel Safety Latches.
- Anti - Corrosive, Powder Coated Exteriors.
- Wear Resistant Grande 80 Alloy Load Chain.
- Wear Free Parts & Rust free Chains.
- Annual Testing & Service Option available.
- Additional text certificate as per Factory Act in form 11 or IDLRT/C, available on request.
- Other available products and accessories.
- Heavy Duty Products ISI Mark Chain Pulley Blocks.
- Beam Travelling Trolleys in Pull-Push Type and Gear Type.
- Mono-blocks i.e. Chain Pulley Block Coupled Directly on Travelling Trolley as Single Equipment.
- Chain Pulley Blocks in Stainless Steel Body & S.S. Chains.
- Non-spark Chain Pulley Blocks & Non-Spark Beam Travelling trolleys available.

Specifications for EzyLift Super 'E' Series Robust Chain Pulley Block


	1	2	3	5	7.5	10	15	20
STANDARD LIFT IN METERS	3	3	3	3	3	3	3	3
HAND POWER REQUIRED IN - Kgs - + 10%	25	28	41	42	43	43	50	50
SHORTEST DISTANCE BETWEEN HOOK IN mm	410	507	550	710	920	930	1050	1200
LOAD CHAIN DIA IN mm	6.3	8	10	10	10	10	10	10
NO OF FALLS	1	1	1	2	3	4	6	8
VELOCITY RATIO -+ 10%	60	108	110	220	330	440	600	850
NET WEIGHT WITH 3 METERS LIFT Kgs	13.5	19.5	35.0	45.0	87.5	108.0	125.8	179
GROSS WEIGHT WITH 3 METERS LIFT - Kgs	14.0	20.5	38.0	57.0	110.0	140.0	169.8	236

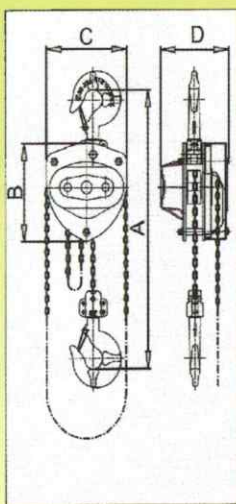


1-2-3- TON

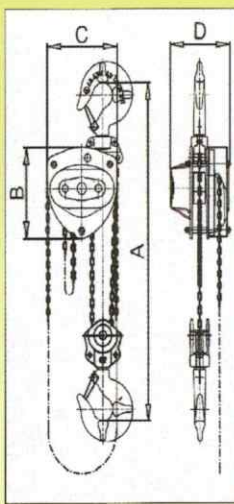


5 TON

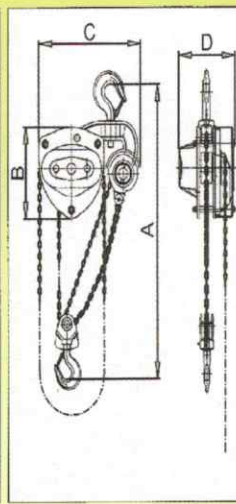

7.5 TON / 10 TON

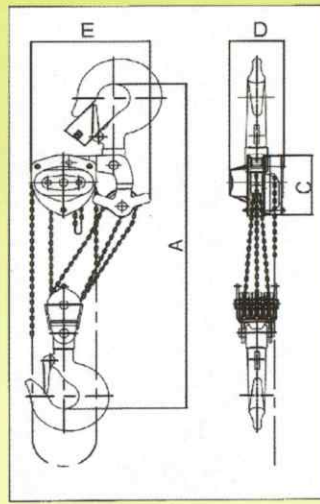

15 TON

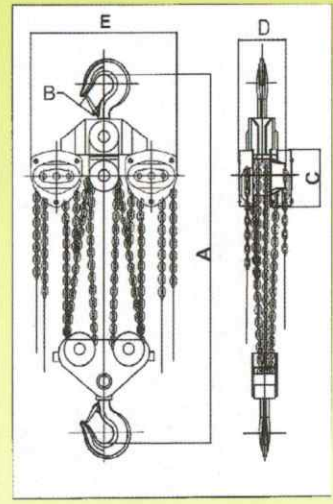

20 TON

PRINCIPAL DIMENSIONS (mm)

CAPACITY (TONS)	Dimension A	Dimension B	Dimension C	Dimension D
1	410	175	165	151
2	507	215	201	178
3	550	255	240	205
5	710	255	240	205
7.5	920	255	440	205
10	930	255	440	205

CAPACITY (TONS)	Dimension A	Dimension B	Dimension C	Dimension D	Dimension E
15	1050	72.7	255	205	590
20	1200	74	255	205	690



ezyliftTM

BE SAFE ALL TIMES

GoEzyLift Tech Pvt. Ltd.

Office : B 402, Sai Deep Plaza, Yashwant Viva Township, Vasai (East) - 401 303.

Factory: Unit No. 2, Janki Industrial Estate, K.T. Park 1, Gourai Pada, Vasai (East) - 401 208.

Phone : +91 96534 07901

Email : sales@ezylift.in

Web : www.ezylift.in

HYDRAULIC FIXED STACKER



ezylift™

BE SAFE ALL TIMES

Model : EL-10
Capacity : 1000 kgs.



Model : EL-10D / EL-20D
Capacity : 1000 / 2000 kgs.



"Creating things to make people's life easy"

EzyLift Electric Lifting Platform are for exclusive goods handling only. No persons are allowed to travel the lift cage/platform. The electric lifting platform is very useful to transfer goods from one floor to another floor and the platform can be flushed with floor level when pit installed.

The EL-10 / EL-20 D can be installed even in places where the prior provisions are not made in the building for the goods lifts.

MAST & CARRIAGE

The Mast & Carriage are made from prime quality steel profiles. The inner mast & carriage assembly are fitted with sealed ball bearing rollers and side thrust rollers to prevent lateral play.

HYDRAULIC SYSTEM

A.C. Hydraulic power pack unit consists of electric motor, hydraulic gear pump, solenoid valve, oil reservoir and oil level indicator, pressure release valve and pressure gauge.

HYDRAULIC CYLINDER

Make from seamless tube & hand chrome plated piston rod. All materials & hardware items confirms ISI specification.

EL-10 is with single hydraulic cylinder.

EL-20D is with dual hydraulic cylinder.

ELECTRICAL CONTROL SYSTEM

The control panel is with MCB contractors and overload relay to protect motor and the transformer to reduce the primary control voltage to 24 V.A.C. for operators safety. The up & down push button control station is with emergency stop switch provided at respective landing, and the limit switch for selected landing levels. The safety door switch allows the lifting platform to operate only when the doors are fully closed. The electric lifting platform cannot be operated from inside the cage /platform, it can be operated only from outside.

* Car Lift models are also available.




HYDRAULIC POWER PACK



CONTROL PANEL

Technical Specification :

Model	EL - 10	EL-10 D / EL-20 D
Capacity (Kgs.)	1000	1000 / 2000
Platform Sizes (mm)	Upto 1200 x 1200	Upto 2000 x 2000
Lifting Speed (m/min.)	6	10
Lowering Speed (m/min.)	8	12
A.C. Power Pack Unit	2 H.P. 3 phase 415/430 V	7.5 H.P. 3 phase 415/430 V
Controls	Push button control for up & down function	
Paint Finish: Nickel Grey & P.O. Red Shade.		

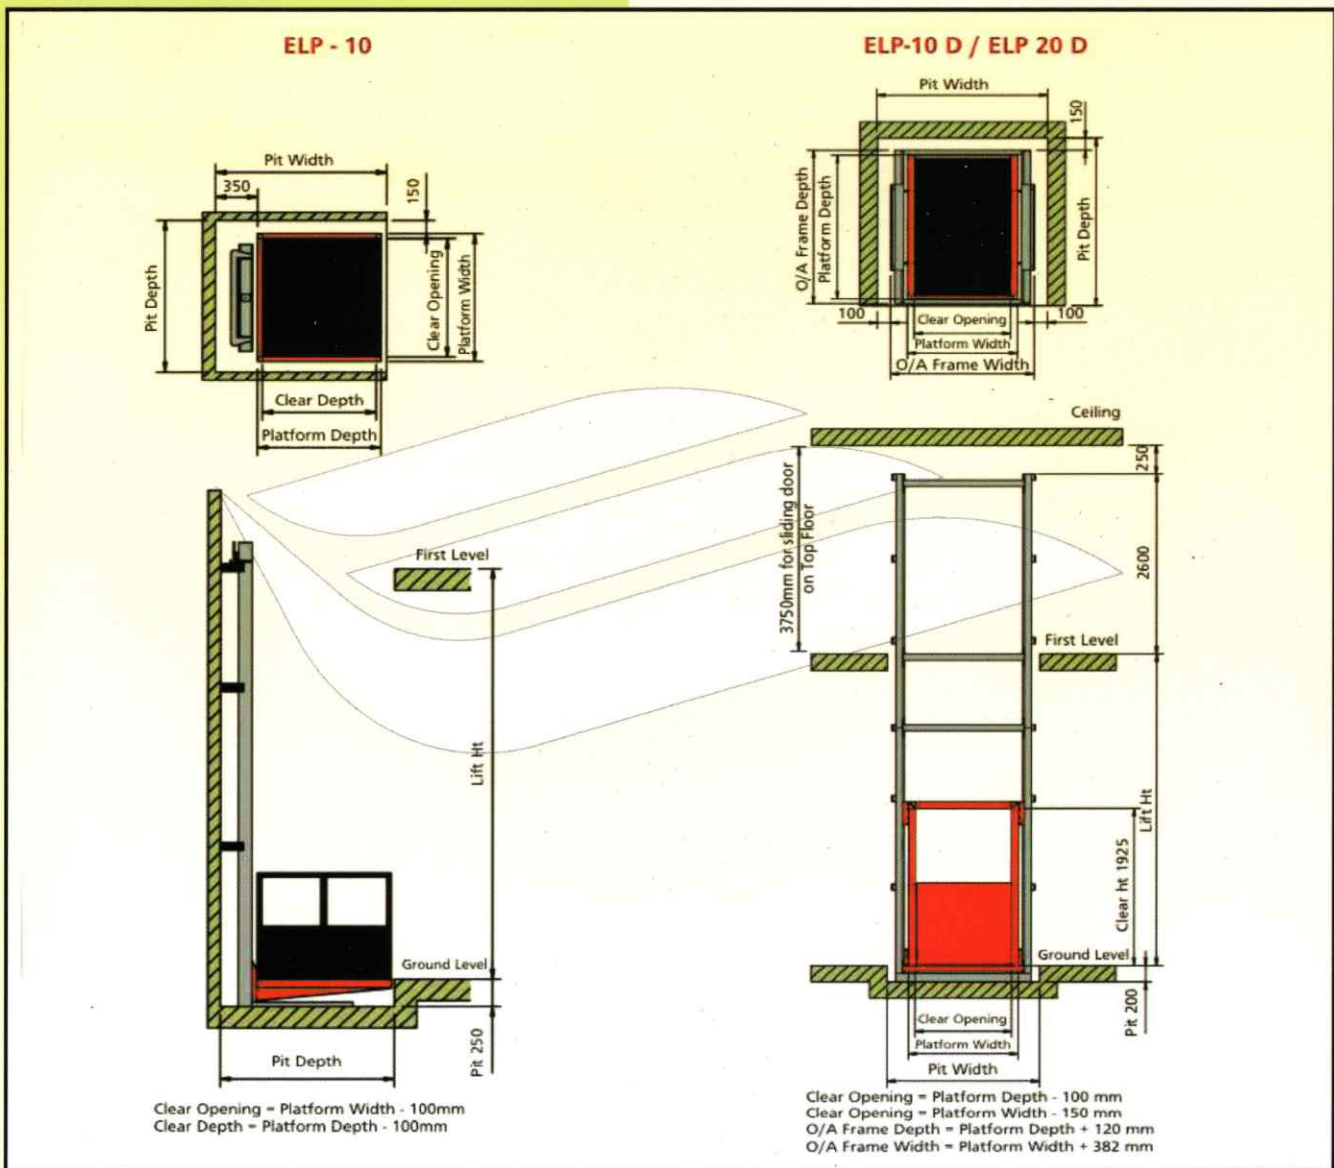

* We reserve the rights to change design due to continuous product improvement process.



EOT Crane



Jib Crane



Hydraulic Lift



Scissor Lift



Stacker



Dock Leveler



CP Block



Hoist



ezyliftTM

BE SAFE ALL TIMES

GoEzyLift Tech Pvt. Ltd.

Office : B 402, Sai Deep Plaza, Yashwant Viva Township, Vasai (East) - 401 303.

Factory : Unit No. 2, Janki Industrial Estate, K.T. Park 1, Gourai Pada, Vasai (East) - 401 208.

Phone : +91 96534 07901

Email : sales@ezylift.in

Web : www.ezylift.in



ezylift™

BE SAFE ALL TIMES


GOODS LIFTS

**"Creating things
to make people's life easy"**



EzyLifts are of two types, One is counter weight type and another is cage hoist type. Both type of this are suitable for wall type canopy as well as self- supporting steel structure. Cage hoist type goods lift is most popular design of EzyLifts and proven to wide applications of goods lifts.

The balancing weight type goods lift is having lifting machine with drive pulley, helical gear box, motor and Brake. The lifting machine is mounted at top in machine room. The lifting is with four rope construction and each rope has four fail construction. This special arrangement is made considering heavy loading and continuous operation. This is most efficient design in comparison to the arrangement of passenger lift used in goods lift by most of the manufactures.

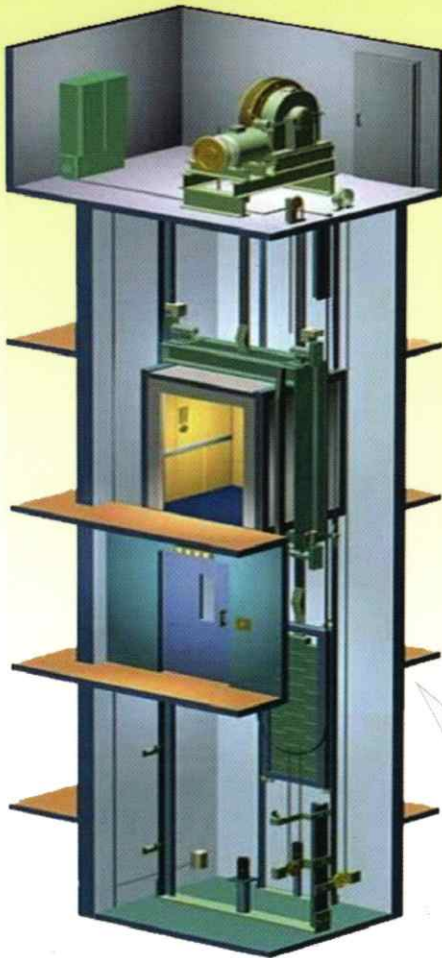

Every single rope is having rated capacity with min 6 F.S. which in four fall construction will provide four times the required F.S. Hence even incase of breakage of three wire rope out of 4 Nos. the cage will not fall. This is extra safety over any other conventional similar type goods lift.

The cage is specially designed to suite the customer's requirements. The cage is made of rolled steel sections and sides are covered with MS Powder Coated sheets. Cage top is covered with M.S. Sheets and bottom is covered with chequered plate for antiskid property. Collapsible door are provided on cage as per entry and exit position. The cage is being guided with guide shoe on 'T' guide rail. Antifriction bearings are provided for smooth and efficient travelling with low friction and longer life.

EzyLifts has unique arrangement of providing two "T" guides for balanced loading and guide rollers for smooth and efficient drive. The goods lifts is being operated by push button station fixed outside the cage on respective floors. "The operation logic is lift can be called for or sent from any floor to any other floor level". The cage movement automatically stop in case if any floor door is open. The floor doors are provided with mechanical and electrical locking arrangement. Hence unless floor door is closed properly lift cannot be started. Additional gravity limit switch is provided for extra safety. In case of failure of over hoisting limit switch, power will be cut off by gravity limit switch upon over travelling of the cage. We specialise in goods lifts suitable for hazardous area gas groups I, IIA, IIB & IIC along with all the electricals duty certified by CMRS Dhanbad. Persons are not allowed to travel in goods lift for safety point of view.



OTHER PRODUCTS



EOT Crane



Jib Crane



Hydraulic Lift



Scissor Lift



Stacker



Dock Leveler



CP Block



Hoist



ezyliftTM

BE SAFE ALL TIMES

GoEzyLift Tech Pvt. Ltd.

Office : B 402, Sai Deep Plaza, Yashwant Viva Township, Vasai (East) - 401 303.

Factory : Unit No. 2, Janki Industrial Estate, K.T. Park 1, Gourai Pada, Vasai (East) - 401 208.

Phone : +91 96534 07901

Email : sales@ezylift.in

Web : www.ezylift.in