Interrupt Handling

Interrupt Vector Table

Interrupt	ROM Location (Hex)	Pin	Flag Clearing
Reset	0000	9	Auto
External hardware interrupt 0 (INT0)	0003	P3.2 (12)	Auto
Timer 0 interrupt (TF0)	000B		Auto
External hardware interrupt 1 (INT1)	0013	P3.3 (13)	Auto
Timer 1 interrupt (TF1)	001B		Auto
Serial COM interrupt (RI and TI)	0023		Programmer clears it.

```
          ORG  0     ;wake-up ROM reset location
          LJMP MAIN ;bypass interrupt vector table

;---- the wake-up program
          ORG  30H
MAIN:
          ....
          END
```

IE (Interrupt Enable) Register

D7							D0
EA	--	ET2	ES	ET1	EX1	ET0	EX0

EA	IE.7	Disables all interrupts. If EA = 0, no interrupt is acknowledged. If EA = 1, each interrupt source is individually enabled or disabled by setting or clearing its enable bit.
--	IE.6	Not implemented, reserved for future use.*
ET2	IE.5	Enables or disables Timer 2 overflow or capture interrupt (8052 only).
ES	IE.4	Enables or disables the serial port interrupt.
ET1	IE.3	Enables or disables Timer 1 overflow interrupt.
EX1	IE.2	Enables or disables external interrupt 1.
ET0	IE.1	Enables or disables Timer 0 overflow interrupt.
EX0	IE.0	Enables or disables external interrupt 0.

*User software should not write 1s to reserved bits. These bits may be used in future flash microcontrollers to invoke new features.

TF Interrupt

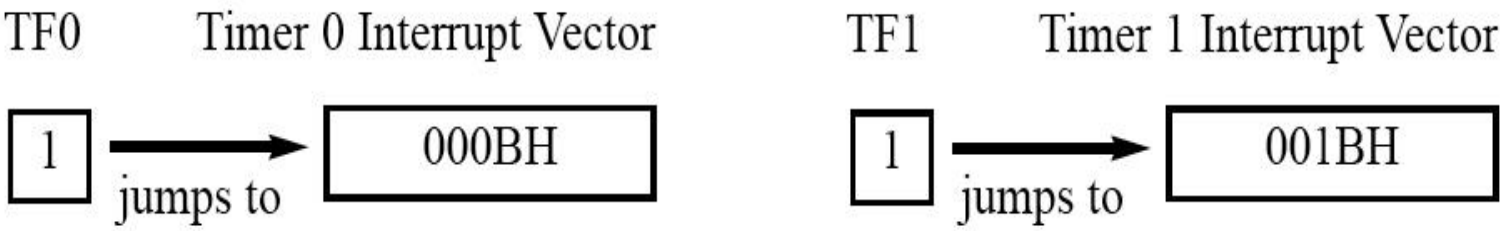

TCON (Timer/Counter) Register (Bit-addressable)

D7							D0
TF1	TR1	TF0	TR0	IE1	IT1	IE0	IT0

TF1	TCON.7	Timer 1 overflow flag. Set by hardware when timer/counter 1 overflows. Cleared by hardware as the processor vectors to the interrupt service routine.
TR1	TCON.6	Timer 1 run control bit. Set/cleared by software to turn timer/counter 1 on/off.
TF0	TCON.5	Timer 0 overflow flag. Set by hardware when timer/counter 0 overflows. Cleared by hardware as the processor vectors to the service routine.
TR0	TCON.4	Timer 0 run control bit. Set/cleared by software to turn timer/counter 0 on/off.
IE1	TCON.3	External interrupt 1 edge flag. Set by CPU when the external interrupt edge (H-to-L transition) is detected. Cleared by CPU when the interrupt is processed. *Note:* This flag does not latch low-level triggered interrupts.
IT1	TCON.2	Interrupt 1 type control bit. Set/cleared by software to specify falling edge/low-level triggered external interrupt.
IE0	TCON.1	External interrupt 0 edge flag. Set by CPU when external interrupt (H-to-L transition) edge is detected. Cleared by CPU when interrupt is processed. *Note:* This flag does not latch low-level triggered interrupts.
IT0	TCON.0	Interrupt 0 type control bit. Set/cleared by software to specify falling edge/low-level triggered external interrupt.

Single Interrupt for Both TI and RI

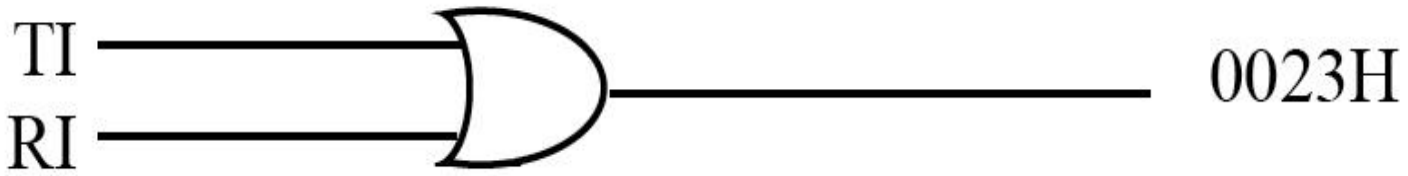

Serial interrupt is invoked by TI or RI flags

Interrupt Priority Register (Bit-addressable)

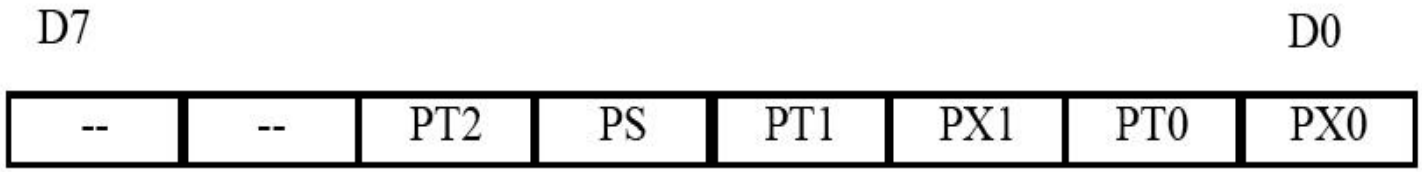

Priority bit = 1 assigns high priority. Priority bit = 0 assigns low priority.

--	IP.7	Reserved
--	IP.6	Reserved
PT2	IP.5	Timer 2 interrupt priority bit (8052 only)
PS	IP.4	Serial port interrupt priority bit
PT1	IP.3	Timer 1 interrupt priority bit
PX1	IP.2	External interrupt 1 priority bit
PT0	IP.1	Timer 0 interrupt priority bit
PX0	IP.0	External interrupt 0 priority bit

User software should never write 1s to unimplemented bits, since they may be used in future products.

Table 11–2 Interrupt Flag Bits for the 8051/52

Interrupt	Flag	SFR Register Bit
External 0	IE0	TCON.1
External 1	IE1	TCON.3
Timer 0	TF0	TCON.5
Timer 1	TF1	TCON.7
Serial port	T1	SCON.1
Timer 2	TF2	T2CON.7 (AT89C52)
Timer 2	EXF2	T2CON.6 (AT89C52)

8051/52 Interrupt Priority Upon Reset

Highest to Lowest Priority	
External Interrupt 0	(INT0)
Timer Interrupt 0	(TF0)
External Interrupt 1	(INT1)
Timer Interrupt 1	(TF1)
Serial Communication	(RI + TI)
Timer 2 (8052 only)	**TF2**