

Graphical Abstract

This is a specimen a_b title

Kushal Umamahesh, Tamás Józsa



Highlights

This is a specimen a_b title

Kushal Umamahesh, Tamás Józsa

- Research highlights item 1
- Research highlights item 2
- Research highlights item 3

This is a specimen a_b title^{*,**}

Kushal Umamahesh^a, Tamás Józsa^{a,2}

^a Centre for Assured and Connected Autonomy, Faculty of Engineering and Applied Sciences, Cranfield University, Cranfield, MK43 0AL, Bedfordshire, United Kingdom

ARTICLE INFO

Keywords:

quadrupole exciton
polariton
WGM
BEC

ABSTRACT

This template helps you to create a properly formatted L^AT_EX manuscript.

`\beginabstract ... \endabstract` and `\begin{keyword} ... \end{keyword}` which contain the abstract and keywords respectively.

Each keyword shall be separated by a `\sep` command.

1. Introduction

2. Numerical methodology

2.1. Overall numerical framework

A two-dimensional steady aero-hydraulic framework was developed to investigate the aerodynamic behaviour of airfoils containing passive internal pores. The external flow is modelled using an incompressible, inviscid and irrotational source-vortex panel method, while the pressure-driven flow through each internal passage is evaluated using the Hagen-Poiseuille and Darcy-Weisbach relations, selected according to the Reynolds number of the flow within the circular pore. The aerodynamic and hydraulic models are coupled through the pressure and surface-normal velocity at the pore openings.

For each pore, the external aerodynamic solution provides the pressure at both ends of the pore. The resulting pressure difference drives flow through the internal passage from the higher-pressure end towards the lower-pressure end. This internal flow introduces suction at one end and blowing at the other, which are represented in the panel method through surface-normal transpiration velocities. The modified boundary condition then changes the external velocity and pressure fields, which in turn affect the pressure difference driving the pore flow. The external and internal flows are therefore solved as a coupled aero-hydraulic system.

The calculation begins from the corresponding impermeable (solid) airfoil solution, with the surface-normal transpiration velocity initially set to zero. The resulting surface pressures provide the initial pressure differences across the pores and hence the initial internal flow rates. The aerodynamic solution, pore pressure differences and transpiration velocities are then updated iteratively until a consistent coupled solution is obtained. This procedure is applied independently to each of the investigated pore heights, $H = 8, 9$ and

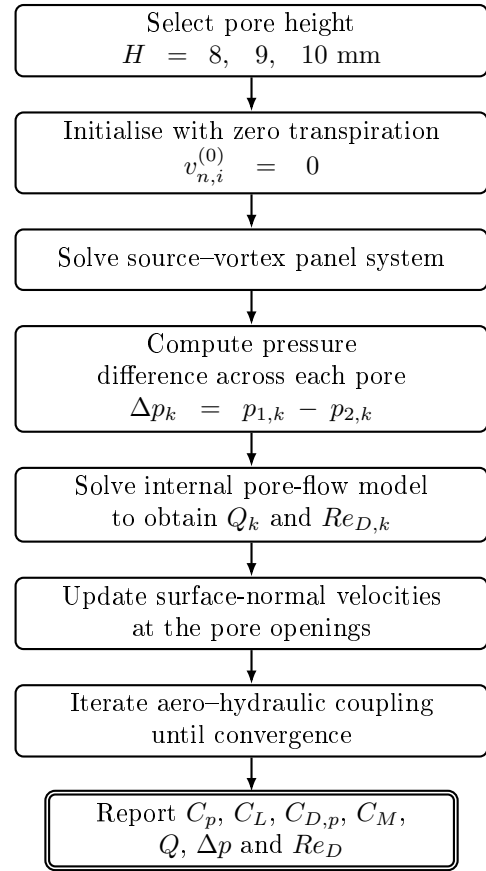


Figure 1: Coupled aero-hydraulic solution procedure applied to the investigated pore heights.

10 mm, and the converged aerodynamic and internal-flow quantities are retained for analysis.

The aerodynamic model assumes steady, incompressible, inviscid and irrotational flow. It therefore does not resolve boundary-layer development, skin-friction drag, flow separation or stall. Consequently, the predicted drag coefficient represents only the pressure-drag contribution obtained from the potential-flow solution. The numerical procedure is summarised in Figure. 1.

*Corresponding author

**Principal corresponding author

✉ k.kushalumamahesh.959@cranfield.ac.uk (K. Umamahesh); wjh@example.org (T. Józsa)

🌐 <https://www.university.org> (T. Józsa)

ORCID(s):

2.2. Airfoil geometry and porous configurations

The baseline geometry is a NACA 0018 airfoil with chord c . The NACA four-digit coordinates are generated analytically and discretised using cosine spacing along the chord.

Each aerodynamic panel i is characterised by its length S_i , control point (x_i, y_i) , unit tangent vector

$$\mathbf{t}_i = (t_{x,i}, t_{y,i}), \quad (1)$$

and outward unit normal vector

$$\mathbf{n}_i = (n_{x,i}, n_{y,i}). \quad (2)$$

The porous structure is represented by passive circular pores formed as internal channels connecting selected locations on the airfoil surface. No prescribed mass-flow rate or external pumping mechanism is imposed. Instead, the magnitude and direction of the internal flow are determined entirely by the aerodynamic pressure difference between the two surface openings.


Three porous-airfoil configurations are considered:

1. **Horizontal porous airfoil:** four independent chordwise pores are arranged with two located above and two below the chord line. Both ends of each pore are located on the same airfoil surface.
2. **Vertical porous airfoil:** four independent pores connect the lower and upper airfoil surfaces and are distributed between $x/c = 0.1$ and $x/c = 0.9$.
3. **Horizontal-vertical porous airfoil:** the horizontal and vertical pore arrangements are combined, resulting in eight internal pores. Although the pores may cross geometrically in the two-dimensional representation, they do not physically intersect or form internal junctions. Each pore remains hydraulically independent, and no flow is exchanged between the horizontal and vertical passages.


The three porous-airfoil configurations considered in the present study are illustrated in Figure 2. The pore locations are mapped onto the upper and lower airfoil surfaces, allowing the prescribed pore positions to be specified independently of the discrete panel control points. This preserves the intended position and orientation of the internal passages without requiring them to coincide with specific panel locations.

The channel geometry is checked before the coupled calculation to ensure that the openings remain within the permitted chordwise region, do not overlap, fit within the local airfoil thickness and satisfy the specified minimum separation.


Each pore k is characterised by a height H_k and a centreline length L_k . The pore length is determined from the geometry of the two corresponding surface openings and the internal passage connecting them.

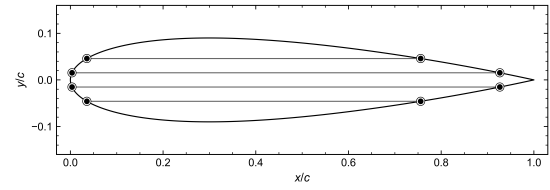

(a) Horizontal porous airfoil

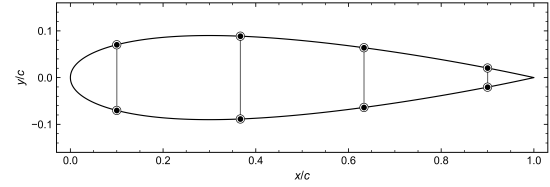

(b) Vertical porous airfoil

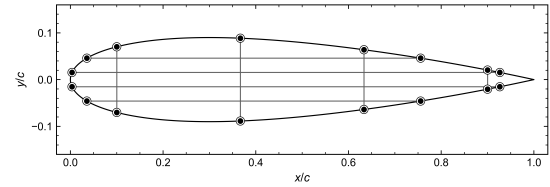

(c) Horizontal-vertical porous airfoil

Figure 2: Porous-airfoil configurations considered in the present study: (a) horizontal porous airfoil, (b) vertical porous airfoil, and (c) horizontal-vertical porous airfoil.

2.3. External aerodynamic model

2.3.1. Potential-flow formulation

The external flow is assumed to be incompressible, inviscid and irrotational. The velocity field can therefore be expressed in terms of a scalar velocity potential,

$$\mathbf{V} = \nabla \Phi. \quad (3)$$

Application of mass conservation gives Laplace's equation,

$$\nabla^2 \Phi = 0. \quad (4)$$

The external-flow solution is obtained by superposing the uniform freestream with constant-strength source panels distributed along the airfoil surface and a single uniform vortex-sheet strength applied over the entire airfoil boundary. The source strength on each panel is determined by enforcing the normal-velocity boundary condition at the corresponding control point. The source panels represent the effect of the airfoil thickness, while the global vortex strength provides the circulation required to generate lift.

2.3.2. Source-vortex panel formulation

For an airfoil discretised into N panels, the aerodynamic unknowns are the N source strengths

$$\boldsymbol{\lambda} = [\lambda_1, \lambda_2, \dots, \lambda_N]^T \quad (5)$$

and the global vortex strength γ .

The normal and tangential source influence coefficients are denoted by I_{ij} and J_{ij} , respectively, while K_{ij} and L_{ij} represent the corresponding vortex influence coefficients.

For an impermeable airfoil, the normal velocity at every control point is zero. To represent a pore opening, this condition is modified by prescribing a surface-normal transpiration velocity $v_{n,i}$,

$$\mathbf{V}_i \cdot \mathbf{n}_i = v_{n,i}. \quad (6)$$

For an impermeable airfoil, the surface-normal velocity is zero, such that

$$v_{n,i} = 0. \quad (7)$$

Following discretisation, the normal boundary condition for panel i becomes

$$\pi \lambda_i + \sum_{\substack{j=1 \\ j \neq i}}^N I_{ij} \lambda_j - \gamma \sum_{j=1}^N K_{ij} = -2\pi V_\infty \cos \beta_i + 2\pi v_{n,i}, \quad (8)$$

where β_i denotes the angle between the local panel normal and the freestream direction.

The trailing-edge Kutta condition is imposed by requiring the tangential velocities on the first and final panels to be equal in magnitude and opposite in direction,

$$V_{t,1} + V_{t,N} = 0. \quad (9)$$

The N normal boundary conditions together with the Kutta condition produce an $(N+1) \times (N+1)$ linear system,

$$\begin{bmatrix} \mathbf{A}_\lambda & \mathbf{a}_\gamma \\ \mathbf{a}_K^T & a_{K,\gamma} \end{bmatrix} \begin{bmatrix} \boldsymbol{\lambda} \\ \gamma \end{bmatrix} = \begin{bmatrix} \mathbf{b}(v_n) \\ b_K \end{bmatrix}. \quad (10)$$

The influence matrix depends only on the discretised airfoil geometry. It is therefore assembled and LU-factorised once for each geometry, while the right-hand side is updated according to the freestream condition and surface-normal transpiration velocity.

2.3.3. Surface velocity and pressure

Following solution of the panel system, the tangential velocity on panel i is evaluated as

$$V_{t,i} = V_\infty \sin \beta_i + \frac{1}{2\pi} \sum_{j=1}^N \lambda_j J_{ij} + \frac{\gamma}{2} - \frac{\gamma}{2\pi} \sum_{j=1}^N L_{ij}. \quad (11)$$

At a porous opening, the local surface velocity contains both tangential and normal components. The velocity magnitude is therefore

$$V_i^2 = V_{t,i}^2 + v_{n,i}^2. \quad (12)$$

The pressure coefficient is obtained from the steady incompressible Bernoulli equation,

$$C_{p,i} = 1 - \frac{V_{t,i}^2 + v_{n,i}^2}{V_\infty^2}. \quad (13)$$

The corresponding absolute pressure is

$$p_i = p_\infty + \frac{1}{2} \rho_\infty V_\infty^2 C_{p,i}. \quad (14)$$

2.4. Internal pore-flow model

The internal flow through each pore is modelled as pressure-driven flow between parallel walls. Each pore k is characterised by a pore height H_k and a centre-line length L_k . Consistent with the two-dimensional formulation, the flow is evaluated per unit span, with a hydraulic diameter

$$D_{h,k} = 2H_k. \quad (15)$$

The flow is driven by the pressure difference between the two ends of the pore,

$$\Delta p_k = p_{1,k} - p_{2,k}. \quad (16)$$

A positive or negative value of Δp_k therefore determines the direction of flow through the pore. The mean internal velocity is related to the volumetric flow rate per unit span, q'_k , by

$$\bar{U}_k = \frac{q'_k}{H_k}. \quad (17)$$

The corresponding pore Reynolds number is

$$Re_{h,k} = \frac{\rho_\infty |\bar{U}_k| D_{h,k}}{\mu_\infty}. \quad (18)$$

The pressure loss through the pore is calculated using the Darcy–Weisbach relation,

$$|\Delta p_k| = f_k \frac{L_k}{D_{h,k}} \frac{\rho_\infty \bar{U}_k^2}{2}, \quad (19)$$

where f_k is the Darcy friction factor. For laminar flow between parallel walls, $f_k = 96/Re_{h,k}$. At higher Reynolds numbers, the Blasius correlation is used, with a smooth transition between the two relations over $2000 < Re_{h,k} < 3000$.

For a given pressure difference, the resulting pressure-loss relation is solved to determine the internal flow rate. The calculated flow is then used to obtain the surface-normal transpiration velocity imposed on the external aerodynamic solution.

2.5. Aero–hydraulic coupling

The external aerodynamic and internal pore-flow models are coupled through the surface pressure and the normal velocity imposed at the two ends of each pore.

The pressure at each end of a pore is obtained from the aerodynamic surface-pressure distribution. For a prescribed pore height, the corresponding surface panels are identified from the aerodynamic discretisation, and their pressure values are used to determine the

pressure associated with that end. For end m of pore k ,

$$p_{m,k} = \frac{\sum_{i \in \mathcal{P}_{m,k}} p_i \ell_i}{\sum_{i \in \mathcal{P}_{m,k}} \ell_i}, \quad m = 1, 2, \quad (20)$$

where $\mathcal{P}_{m,k}$ represents the panels covered by the pore end and ℓ_i is the corresponding overlap length.

The pressure difference across each pore is then

$$\Delta p_k = p_{1,k} - p_{2,k}, \quad (21)$$

which provides the driving pressure for the internal pore-flow model. The resulting flow rate per unit span, q'_k , gives the mean velocity through the pore as

$$\bar{U}_k = \frac{q'_k}{H_k}. \quad (22)$$

This velocity is introduced into the aerodynamic model as a surface-normal transpiration velocity. With the outward surface normal defined as positive, flow entering the pore is assigned a negative normal velocity, while flow leaving the pore is assigned a positive normal velocity,

$$v_{n,k}^{\text{in}} = -\bar{U}_k, \quad v_{n,k}^{\text{out}} = +\bar{U}_k. \quad (23)$$

When a pore end extends across several panels, the transpiration condition is applied over the corresponding surface region rather than at a single panel control point.

The imposed normal velocity alters the external flow and therefore the surface-pressure distribution. This changes the pressure difference driving the internal pore flow, which in turn updates the transpiration velocity. The aerodynamic and pore-flow solutions are therefore updated iteratively until the pressure difference and internal flow are consistent with one another. This procedure is repeated independently for each pore height considered in the study, and all reported cases reached a converged coupled solution.

2.6. Aerodynamic coefficients

The aerodynamic forces are obtained by integrating the pressure contribution over the discretised airfoil surface. The contribution of panel i to the global Cartesian force coefficients is

$$dC_{x,i} = -C_{p,i} n_{x,i} \frac{S_i}{c}, \quad (24)$$

$$dC_{y,i} = -C_{p,i} n_{y,i} \frac{S_i}{c}. \quad (25)$$

The total Cartesian force coefficients are

$$C_x = \sum_{i=1}^N dC_{x,i}, \quad C_y = \sum_{i=1}^N dC_{y,i}. \quad (26)$$

Table 1

Numerical and operating conditions used in the present study.

Parameter	Symbol	Value
Airfoil	—	NACA 0018
Chord length	c	1 m
Number of panels	N	1000
Fluid density	ρ_∞	1.225 kg m ⁻³
Dynamic viscosity	μ_∞	1.8 × 10 ⁻⁵ Pa s
Freestream pressure	p_∞	101325 Pa
Chord Reynolds number	Re_c	5.0 × 10 ⁵
Principal angle of attack	α	4°
Angle-of-attack range	α	−5° to 15°
Angle-of-attack increment	$\Delta\alpha$	1°
Pore height	H	8, 9, 10 mm

Rotation into the freestream-aligned coordinate system gives the lift and pressure-drag coefficients,

$$C_L = C_y \cos \alpha - C_x \sin \alpha, \quad (27)$$

$$C_{D,p} = C_x \cos \alpha + C_y \sin \alpha. \quad (28)$$

The pitching-moment coefficient is evaluated about the quarter-chord reference location,

$$(x_{\text{ref}}, y_{\text{ref}}) = (0.25c, 0), \quad (29)$$

using

$$C_M = - \sum_{i=1}^N \frac{(x_i - x_{\text{ref}}) dC_{y,i} - (y_i - y_{\text{ref}}) dC_{x,i}}{c}. \quad (30)$$

For diagnostic comparison, an additional lift coefficient is calculated from the solved circulation using the Kutta–Joukowski relationship,

$$C_{L,\Gamma} = \frac{2\gamma \sum_{i=1}^N S_i}{V_\infty c}. \quad (31)$$

2.7. Numerical setup

The aerodynamic performance of each porous configuration is compared with that of the corresponding impermeable airfoil under the same geometry, panel discretisation and operating conditions. An inviscid XFOIL solution is also used as an additional reference to compare the impermeable-airfoil pressure distribution and its variation with angle of attack.

Unless otherwise stated, all calculations are performed for a NACA 0018 airfoil using the numerical and freestream conditions summarised in Table 1.

The freestream velocity is determined from the prescribed chord Reynolds number as

$$V_\infty = \frac{Re_c \mu_\infty}{\rho_\infty c}. \quad (32)$$

Each angle of attack is solved independently, and the solution from the preceding angle is not used to initialise the subsequent case.

3. Results and discussion

The aerodynamic behaviour of the three porous-airfoil configurations was investigated over an angle-of-attack range of -5° to 15° . Three pore heights, $H = 8, 9$ and 10 mm, were considered for the horizontal, vertical and horizontal-vertical porous airfoils. The corresponding impermeable (solid) airfoil panel-method solution and the inviscid XFOIL prediction are included as reference cases.

The effect of the pores is first examined through the lift and moment coefficients over the angle-of-attack range. The observed aerodynamic trends are then interpreted using the corresponding pressure and velocity field differences. A detailed flow-field comparison is presented at $\alpha = 10^\circ$ for a pore height of $H = 9$ mm.

3.1. Panel method validation against XFOIL

The impermeable source-vortex panel-method solution is compared with the corresponding inviscid XFOIL prediction in Figures. 3 and 4. Both methods show similar trends in lift and pitching moment over the investigated angle-of-attack range.

This agreement provides a useful reference for assessing the aerodynamic effects introduced by the pores. Small differences between the panel-method and XFOIL predictions are expected because the two approaches use different numerical formulations, although both represent inviscid external flow.

The impermeable panel-method solution is therefore used as the primary reference when evaluating the porous-airfoil configurations. This ensures that the porous and solid airfoils are compared using the same geometry, panel discretisation, aerodynamic formulation and operating conditions.

3.2. Effect of pores on lift

Figure 3 compares the variation of lift coefficient with angle of attack for the three porous-airfoil configurations and pore heights. The horizontal porous airfoil produces the largest change in lift. At positive angles of attack, its lift coefficient is higher than that of the impermeable reference, and the difference becomes more pronounced as the angle of attack increases. The effect also strengthens with pore height, with $H = 10$ mm producing the highest lift at larger positive angles of attack. At negative angles of attack, increasing the pore height similarly increases the magnitude of the negative lift. This nearly symmetric lift response about the zero-lift condition is consistent with the symmetric NACA 0018 geometry.

For the horizontal configuration, both ends of each pore are located on the same airfoil surface. The streamwise variation in surface pressure therefore creates a pressure difference between the two ends and drives internal flow from the locally higher-pressure region towards the lower-pressure region. This produces

suction at one end and blowing at the other, changing the local surface-normal velocity and redistributing the external pressure and velocity fields along the airfoil surface. At positive angle of attack, the different pressure distributions over the suction and pressure surfaces lead to a net redistribution of aerodynamic loading that increases lift.

The stronger dependence on pore height is consistent with the reduction in hydraulic resistance as the pore becomes larger. For a given pressure difference, a larger pore height permits a greater internal flow and therefore a stronger interaction between the pore flow and the external aerodynamic field.

The vertical porous airfoil shows a distinctly different behaviour. At positive angles of attack, its lift coefficient is generally lower than that of the impermeable airfoil, while the three pore-height cases remain relatively close over most of the investigated range.

In this configuration, each pore connects the pressure surface to the suction surface. The resulting pressure difference drives internal flow between the two surfaces and partially reduces the pressure difference responsible for lift. This pressure equalisation is consistent with the lower lift coefficient obtained for the vertical porous airfoil. The small separation between the pore-height cases also indicates that this configuration is less sensitive to pore height than the horizontal arrangement.

The horizontal-vertical porous airfoil remains comparatively close to the impermeable reference. At positive angles of attack, its lift coefficient is generally slightly lower than that of the solid airfoil, and the three pore-height cases remain closely grouped.

This behaviour reflects the simultaneous influence of the horizontal and vertical pore arrangements. The horizontal pores redistribute flow between different chordwise locations on the same surface, whereas the vertical pores transfer flow between the pressure and suction surfaces. The lift-enhancing redistribution associated with the horizontal pores is therefore partly offset by the pressure equalisation introduced by the vertical pores.

The horizontal and vertical pores remain physically separate and hydraulically independent. However, their aerodynamic effects interact through the external pressure field, since changes produced by one set of pores alter the surface pressures that drive the other set. Consequently, the response of the horizontal-vertical porous airfoil is not a simple superposition of the two individual configurations.

Overall, the results show that the aerodynamic effect of the pores is governed mainly by their orientation, placement and the pressure difference between the connected surface locations. Pore height also influences the response, but its effect is strongest for the horizontal configuration and considerably weaker for the vertical and horizontal-vertical arrangements.

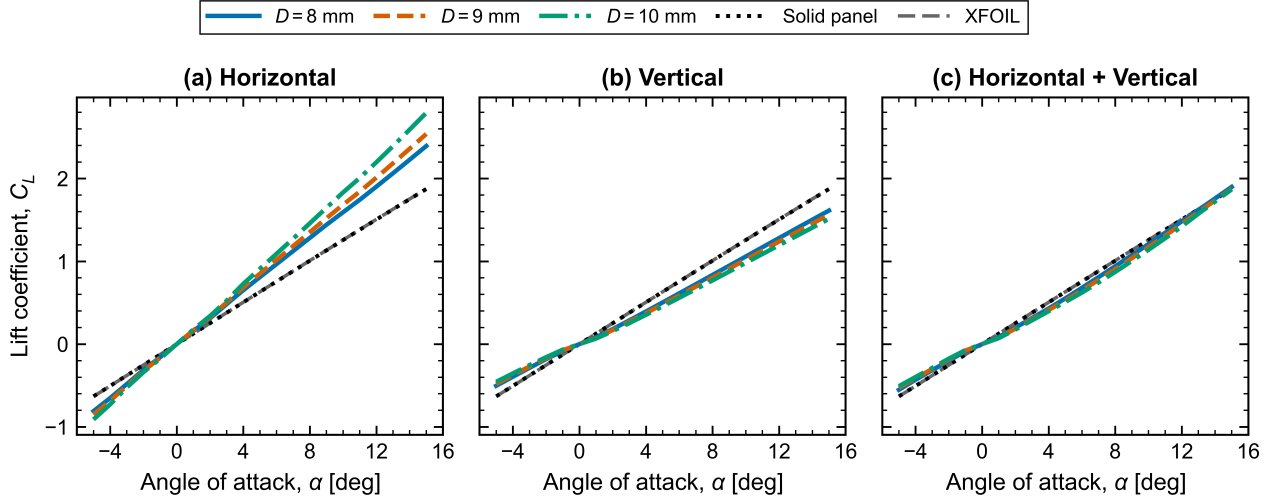


Figure 3: Lift coefficient as a function of angle of attack for (a) the horizontal porous airfoil, (b) the vertical porous airfoil, and (c) the horizontal-vertical porous airfoil. Results are shown for pore heights $H = 8, 9$ and 10 mm together with the impermeable panel-method and inviscid XFOIL reference solutions.

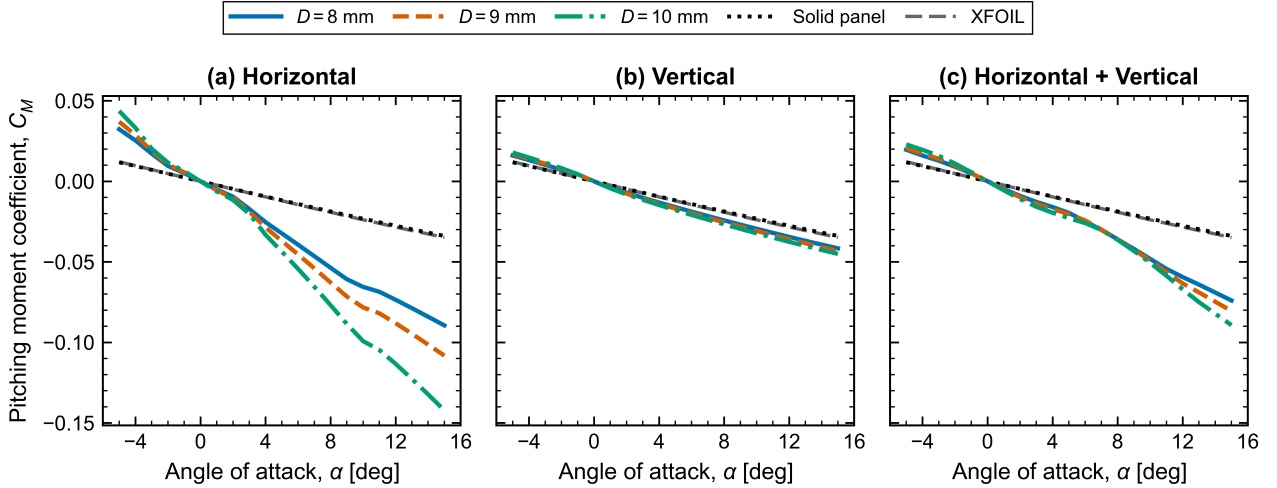


Figure 4: Pitching-moment coefficient about the quarter chord as a function of angle of attack for (a) the horizontal porous airfoil, (b) the vertical porous airfoil, and (c) the horizontal-vertical porous airfoil. Results are shown for pore heights $H = 8, 9$ and 10 mm together with the impermeable panel-method and inviscid XFOIL reference solutions.

3.3. Effect of pores on pitching moment

The corresponding moment coefficients are presented in Figure 4. The horizontal porous airfoil produces the largest increase from the impermeable-airfoil response. As the positive angle of attack increases, the pitching-moment coefficient becomes progressively more negative. The magnitude of this change also increases with pore height, with $H = 10$ mm producing the largest negative pitching moment at higher positive angles of attack.

This behaviour is associated with the chordwise redistribution of surface pressure caused by the horizontal pores. Since the two ends of each pore are located at different chordwise positions along a given airfoil surface, the pressure changes induced by the

internal flow act at different distances from the quarter-chord reference point. These local pressure variations therefore contribute differently to the pitching moment. Increasing the pore height strengthens the internal flow and the resulting pressure redistribution, leading to a larger change in the pitching-moment coefficient.

The increase in lift obtained with the horizontal porous airfoil is therefore accompanied by a larger negative pitching moment. This represents an important aerodynamic trade-off, since the configuration that provides the greatest lift enhancement also produces the largest change in longitudinal loading.

The vertical porous airfoil produces considerably smaller changes in moment, and the three pore-height

cases remain closely grouped over most of the investigated angle-of-attack range. This behaviour is consistent with the weaker dependence on pore height observed in the lift results.

For the vertical configuration, the two ends of each pore are positioned on the upper and lower surfaces at approximately the same chordwise location. The resulting pressure redistribution therefore occurs mainly between the pressure and suction surfaces rather than between widely separated positions along the chord. The corresponding change in the chordwise pressure distribution is smaller than for the horizontal pores, resulting in a weaker pitching-moment response.

The horizontal-vertical porous airfoil exhibits behaviour between that of the individual horizontal and vertical configurations. The pitching moment becomes increasingly negative with positive angle of attack, although the departure from the impermeable-airfoil solution remains smaller than for the horizontal porous airfoil. The influence of pore height also becomes more noticeable at higher positive angles of attack.

In this configuration, the horizontal pores redistribute loading between different chordwise positions, while the vertical pores mainly redistribute pressure between the upper and lower surfaces. The two pore arrangements remain physically separate and hydraulically independent, but their aerodynamic effects interact through the external pressure field. The resulting pitching-moment variation therefore reflects the combined influence of these two pressure-redistribution mechanisms.

Overall, the pitching-moment results show that the effect of the pores depends not only on the extent of the pressure redistribution, but also on where it occurs along the chord. The horizontal porous airfoil produces the largest change in moment because the associated pressure variations occur at widely separated chordwise locations, creating a stronger moment about the quarter-chord reference point. In contrast, the vertical porous airfoil produces a smaller change because its pressure redistribution occurs mainly between the upper and lower surfaces at similar chordwise positions.

3.4. Flow-field characteristics of porous airfoils

To examine how the pores alter the external flow, the pressure and velocity fields of the porous airfoils are compared with those of the corresponding impermeable airfoil at $\alpha = 10^\circ$ and $H = 9$ mm.

The comparison is presented using pressure- and velocity-difference contours rather than the absolute flow fields. The absolute contours are dominated by the overall aerodynamic behaviour of the airfoil and therefore make the local influence of the pores more difficult to identify. Subtracting the impermeable-airfoil solution isolates the changes introduced by the pore flow, allowing the location, direction and relative strength

of the resulting pressure and velocity variations to be examined more clearly.

3.4.1. Pressure-field characteristics

Figure 5 presents the pressure difference between the porous and impermeable airfoils,

$$\Delta p = p_{\text{porous}} - p_{\text{solid}}, \quad (33)$$

for the three pore arrangements.

The pressure difference is shown instead of the absolute pressure field to isolate the changes introduced by the pores. In the absolute solution, the pressure distribution is dominated by the overall airfoil loading and the strong pressure gradients near the leading edge. Subtracting the impermeable-airfoil solution makes the local changes associated with the pore flow easier to identify.

The largest pressure differences occur close to the pore ends. In several regions, adjacent positive and negative values of Δp produce a dipole-like pressure pattern. This behaviour is associated with suction at one end of a pore and blowing at the other, which alter the local external flow in opposite ways and create neighbouring regions of increased and reduced pressure.

The influence of these pressure changes on lift depends on the surface on which they occur. At positive angle of attack, a reduction in pressure on the upper suction surface strengthens the suction and tends to increase lift, whereas an increase in pressure weakens the suction. On the lower pressure surface, an increase in pressure contributes positively to lift, while a reduction in pressure has the opposite effect.

For the horizontal porous airfoil, the pressure changes are mainly concentrated around the chordwise pore ends. Since both ends of each pore lie on the same airfoil surface, the internal flow redistributes pressure between different chordwise locations. The combined effect of these local changes increases the aerodynamic loading across the airfoil, consistent with the larger lift coefficient observed for the horizontal configuration.

The vertical porous airfoil shows a different pressure distribution. Each pore connects the pressure surface directly to the suction surface, allowing flow to pass from the higher-pressure region towards the lower-pressure region. This produces local pressure changes at both ends of the pore while also partially reducing the pressure difference between the upper and lower surfaces. This behaviour is consistent with the lower lift coefficient obtained for the vertical configuration.

The horizontal-vertical porous airfoil combines both mechanisms. The horizontal pores redistribute pressure along the airfoil surfaces, while the vertical pores transfer flow between the pressure and suction surfaces. Although the two pore arrangements are physically separate and hydraulically independent, their aerodynamic effects interact through the external

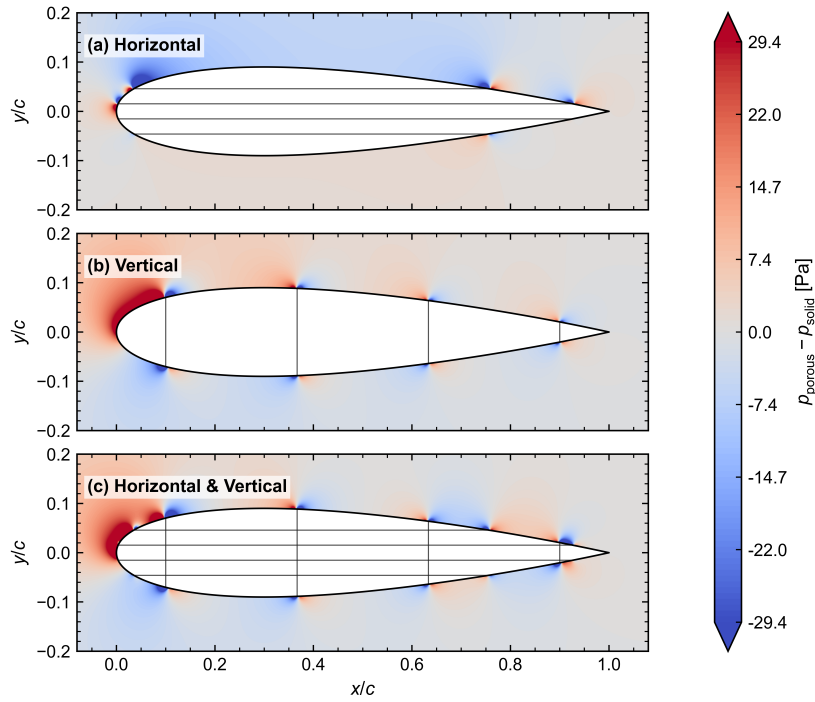


Figure 5: Pressure-field difference between the porous and impermeable airfoils at $\alpha = 10^\circ$ and $H = 9$ mm for (a) the horizontal porous airfoil, (b) the vertical porous airfoil, and (c) the horizontal–vertical porous airfoil. Positive values indicate an increase in pressure relative to the impermeable airfoil, while negative values indicate a reduction.

pressure field. The pressure equalisation produced by the vertical pores therefore partly offsets the lift-enhancing redistribution associated with the horizontal pores, resulting in an overall response closer to that of the impermeable airfoil.

3.4.2. Velocity-field characteristics

The velocity field is presented as the percentage difference relative to the impermeable-airfoil solution,

$$\Delta|\mathbf{V}|_{\%} = \frac{|\mathbf{V}|_{\text{porous}} - |\mathbf{V}|_{\text{solid}}}{|\mathbf{V}|_{\text{solid}}} \times 100. \quad (34)$$

As with the pressure contours, this comparison isolates the changes introduced by the pores from the dominant background flow around the airfoil. The largest velocity differences occur close to the pore ends, where the imposed surface-normal flow locally perturbs the external velocity field. Adjacent regions of acceleration and deceleration are visible around several pores and correspond closely to the pressure patterns shown in Figure. 5.

The relationship between the two fields is consistent with the Bernoulli relation. Regions of increased velocity are generally associated with reduced static pressure, while regions of decreased velocity correspond to an increase in pressure. The velocity contours therefore provide further insight into the flow changes

responsible for the pressure redistribution and the resulting aerodynamic loading.

For the horizontal porous airfoil, alternating regions of acceleration and deceleration are concentrated around the chordwise pore ends. Since both ends of each pore lie on the same airfoil surface, the internal flow redistributes the external velocity between different chordwise locations. The combined changes on the suction and pressure surfaces strengthen the pressure difference across the airfoil, consistent with the increase in lift and the larger change in pitching moment observed for this configuration.

The vertical porous airfoil shows a different velocity pattern. Flow between the pressure and suction surfaces changes the external velocity on both sides of the airfoil and reduces part of the velocity contrast between them. This behaviour is consistent with the partial pressure equalisation discussed previously and the corresponding reduction in lift. A broader region of velocity difference is also visible near the leading edge, where the external flow experiences strong pressure and velocity gradients.

The horizontal–vertical porous airfoil contains features associated with both pore arrangements. The horizontal pores produce local chordwise acceleration and deceleration, while the vertical pores redistribute flow between the pressure and suction surfaces. Although the two pore arrangements remain physically

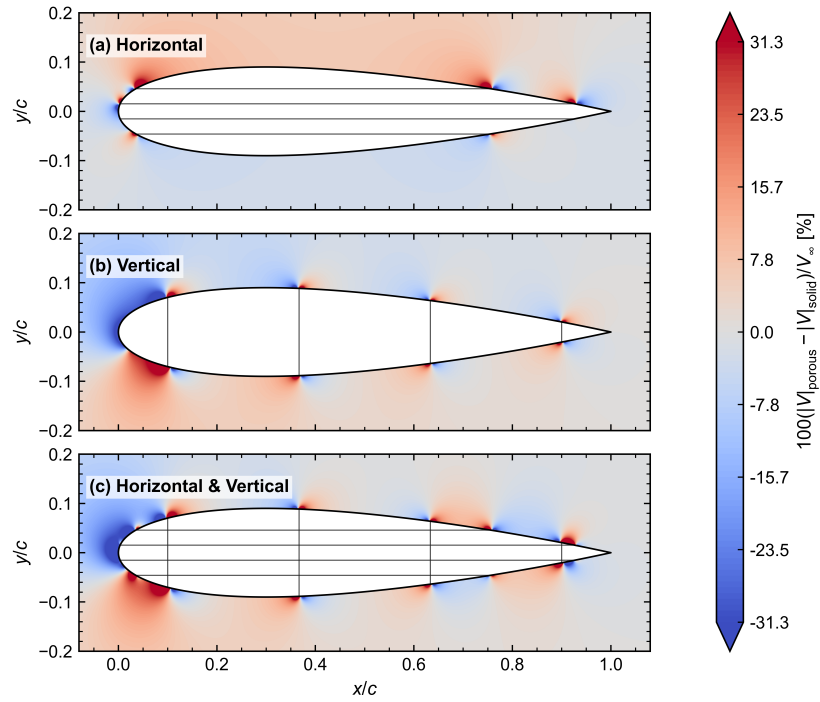


Figure 6: Percentage difference in velocity magnitude between the porous and impermeable airfoils at $\alpha = 10^\circ$ and $H = 9$ mm for (a) the horizontal porous airfoil, (b) the vertical porous airfoil, and (c) the horizontal–vertical porous airfoil. Positive values indicate an increase in velocity magnitude, while negative values indicate a reduction relative to the impermeable airfoil.

separate and hydraulically independent, their aerodynamic effects interact through the external flow field. The resulting velocity distribution therefore reflects the combined influence of both mechanisms rather than a simple superposition of the individual configurations.

Overall, the velocity contours support the trends observed in the pressure field and aerodynamic coefficients. The horizontal pores primarily redistribute the flow along the airfoil surfaces, whereas the vertical pores transfer flow between the pressure and suction surfaces. These different flow mechanisms contribute to the contrasting lift and pitching-moment behaviour of the three porous-airfoil configurations.

3.5. Overall comparison of porous configurations

The combined aerodynamic and flow-field results show that the response of the porous airfoil depends strongly on the orientation and placement of the pores, while the influence of pore height varies between the different configurations.

Among the three configurations, the horizontal porous airfoil produces the strongest aerodynamic effect. At positive angles of attack, it increases the lift coefficient relative to the impermeable airfoil, with the enhancement becoming more pronounced as the pore height increases. This increase in lift is accompanied by a more negative pitching moment, indicating that the

pores also redistribute the aerodynamic loading along the chord.

The vertical porous airfoil shows a different behaviour. The pores connect the higher-pressure pressure surface to the lower-pressure suction surface, allowing flow to pass between the two sides of the airfoil. This partially reduces the pressure difference responsible for lift and results in a lower lift coefficient than the impermeable reference at positive angles of attack. The relatively small separation between the pore-height cases also indicates a weaker sensitivity to pore height, together with smaller changes in pitching moment.

The horizontal–vertical porous airfoil combines both pore arrangements. The horizontal and vertical pores remain physically separate and hydraulically independent, but their aerodynamic effects interact through the external pressure and velocity fields. The pressure redistribution associated with the vertical pores partly offsets the lift-enhancing effect of the horizontal pores, causing the overall aerodynamic response to remain closer to that of the impermeable airfoil.

The pressure- and velocity-difference fields support these trends. The largest local changes occur near the pore ends, where the internal flow alters the surrounding external flow. The horizontal pores mainly redistribute the flow between different chordwise locations on the same surface, whereas the vertical pores transfer

flow between the pressure and suction surfaces. The resulting aerodynamic response therefore depends not only on pore height, but also on the surface locations connected by each pore and the pressure difference established between them.

Overall, the horizontal porous airfoil provides the greatest potential for lift enhancement among the configurations considered. However, the associated increase in the magnitude of the pitching moment shows that the performance of a porous-airfoil design should not be assessed from lift alone. Pore orientation, placement and height should therefore be considered together with their effects on both aerodynamic forces and moments.

4. Conclusion