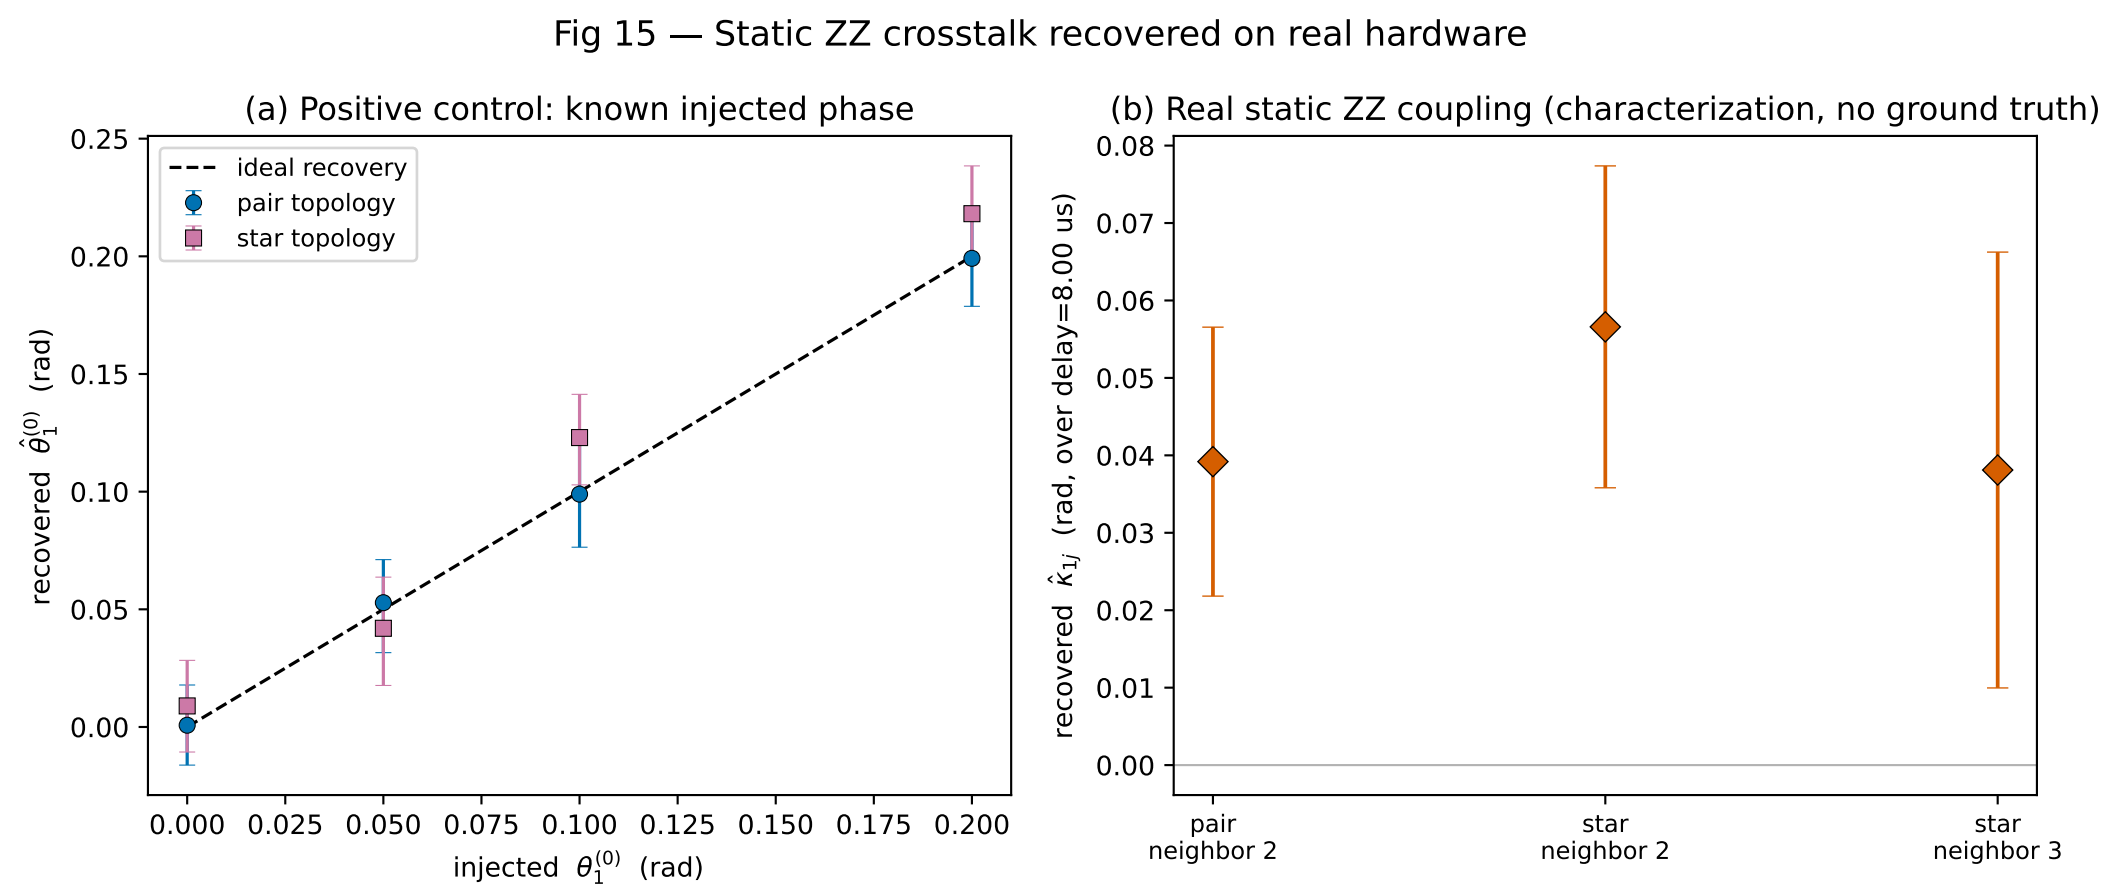
Fig 15 — Static ZZ crosstalk recovered on real hardware
(a) Positive control: known injected phase
ideal recovery
pair topology
star topology
recovered $\hat{\theta}_1^{(0)}$ (rad)
injected $\theta_1^{(0)}$ (rad)
0.25
0.20
0.15
0.10
0.05
0.00
0.000
0.025
0.050
0.075
0.100
0.125
0.150
0.175
0.200
(b) Real static ZZ coupling (characterization, no ground truth)
recovered $\hat{\kappa}_{1j}$ (rad, over delay=8.00 us)
0.08
0.07
0.06
0.05
0.04
0.03
0.02
0.01
0.00
pair
neighbor 2
star
neighbor 2
star
neighbor 3
backend=offline_local_sim, qubits=[0, 1], date=offline, shots=2000/circuit, delay=8.00 us